



# Catalogue 2020

## Flow rate classes

Z	≤	9,0 l/min
A	≤	15,0 l/min
S	≤	20,0 l/min
B	≤	25,0 l/min
C	≤	30,0 l/min
D	≤	38,0 l/min

max. flow rate at flow pressure of 3 bar

## Certifications



DIN EN ISO  
9001: 2008



DIN EN 274



DVGW



SABS



SVGW



WaterMark



kiwa

## Pictograms



### s-pointer

Angle of water flow can be adjusted to fit different shaped basins.



### Eco

Saves at least 40 % water.



### Pull-out spout

Fitting with pull-out spout for extended working radius.



### Hand spray

Fitting with pull-out hand spray, can be switched over from normal flow to spray mode.



### Push-fit connector

It just takes one click to fit the end of the hose to thetheadapter on the mixer body with the push-fit connector.



### Bayonet connection

Fitting suitable for installation very close to a window. The bayonet connection allows the fitting to be retracted and tilted sideways.



### Multi-connector

Fitting with connection for washing machine or dishwasher. Multi-connector makes turning water supply on or off very convenient.



### Low pressure

Fitting suitable for under-counter water heaters.



### Sensor

Fitting with non-contact operation.



### Battery operation

Electronic fitting with battery operation.



### Mains operated

Electronic fitting for 230 V AC connection.



### HotStop

Fitting with anti-scald limiter.



### Showering hygiene

Quick and easy to drain remaining water from the hand spray. No dripping.



### Scald protection

Thermostatic body independent of temperature.



### Cool-Start

The middle position of the handle allows cold water to flow. The hot water is turned on by moving the lever to the left.



Almost 100 years ago

KLUDI began manufacturing bathroom fittings using traditional methods of craftsmanship. Followed by high-quality, reliable fixtures of timeless design, this expertise formed the foundation of KLUDI. From the tradition as a faucet specialist, the goal was created to combine the highest quality of use and perfect design in a unique way. Thus the claim Water in Perfection finds unmistakable expression in our products as well as in all services we provide for our customers.

It inspires and drives

our future activities.







## BATHROOM RANGES

Technology navigator	6
Surfaces	10
List of article numbers	13
General terms and conditions of sale	286

**Fittings**

KLUDI ADLON	22
KLUDI NOVA FONTE	30
KLUDI AMBA	36
KLUDI E2	44
KLUDI BALANCE	51
KLUDI AMEO	59
KLUDI BINGO STAR	67
KLUDI BOZZ	68
KLUDI ZENTA SL	75
KLUDI ZENTA	82
KLUDI OBJEKTA	98
KLUDI PURE&STYLE	105
KLUDI PURE&SOLID	110
KLUDI PURE&EASY	115
KLUDI STANDARD	121
KLUDI PUSH	128
Pre-installation sets	131

**Electronic Fittings**

KLUDI BALANCE E	51-53
KLUDI ZENTA E	82-91

**Thermostat**

Thermostat surface-mounted	144
KLUDI PUSH	146
Thermostat concealed	147

**Bathroom accessories**

KLUDI AMBA	152
KLUDI E2	155

**Showers**

KLUDI ADLON	160
KLUDI NOVA FONTE	162
KLUDI FIZZ	165
KLUDI FRESHLINE	170
KLUDI A-QA	175
KLUDI ZENTA	187
KLUDI LOGO	192
KLUDI COCKPIT	203
Shower systems	204
Special showers	214
Shower hoses	217
Accessories for all shower ranges	219

**Wastes**

Washbasin- and bidet wastes	224
Bath- and shower wastes	229

## HOSPITAL AND CARE

KLUDI PURE&EASY CARE	116
KLUDI MEDI CARE	234

## KITCHEN RANGES

**Fittings**

KLUDI E-GO	240
KLUDI STEEL	242
KLUDI MX	243
KLUDI L-INE	246
KLUDI L-INE S	248
KLUDI BINGO STAR	249
KLUDI BINGO STAR XS	251
KLUDI BOZZ	252
KLUDI ZENTA	253
KLUDI OBJEKTA	254
KLUDI TREND0	256
KLUDI SCOPE	258
KLUDI LOGO NEO	260
KLUDI STANDARD	262

SPARE PARTS  
AND ACCESSORIES

Cartridge navigator	270
Gasket kit navigator	272
Spare parts and accessories	274




# Technology navigator bathroom

Are you looking for a KLUDI bathroom fitting to meet specific technical requirements?

Just take a look at the Technology Navigator. It will give you all the technical specifications at a glance. And this is how it works: for example, to find a bathroom fitting with s-pointer that will save water, watch out for the dot in the columns below both the relevant pictograms.

This indicates: the KLUDI AMBA line has this fitting in its range.

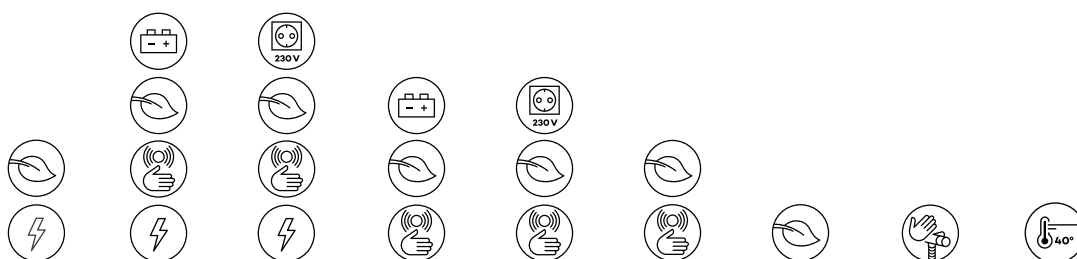

KLUDI ADLON									
KLUDI AMBA								•	•
KLUDI AMEO	•							•	
KLUDI A-QA								•	
KLUDI BALANCE		•	•	•	•				
KLUDI BINGO STAR								•	
KLUDI BOZZ	•							•	
KLUDI COCKPIT									•
KLUDI E2								•	
KLUDI FIZZ									
KLUDI FRESHLINE									
KLUDI LOGO									
KLUDI MEDI CARE								•	
KLUDI NOVA FONTE								•	
KLUDI OBJEKTA	•							•	
KLUDI PURE&EASY	•							•	
KLUDI PURE&SOLID	•							•	
KLUDI PURE&STYLE	•							•	
KLUDI PUSH									
KLUDI STANDARD									
KLUDI ZENTA				•	•	•		•	
KLUDI ZENTA SL	•							•	



**s-pointer**  
Angle of water flow can be adjusted to fit different shaped basins.



**Showering hygiene**  
Quick and easy to drain remaining water from the hand spray. No dripping.



**Low pressure**  
Fitting suitable for under-counter water heaters.



**Sensor**  
Fitting with non-contact operation.



**Mains operated**  
Electronic fitting for 230 V AC connection.



**Cool-Start**  
The middle position of the handle allows cold water to flow. The hot water is turned on by moving the lever to the left.




**Eco**  
Saves at least 40 % water.



**Scald protection**  
Thermostatic body independent of temperature.



**HotStop**  
Fitting with anti-scald limiter.

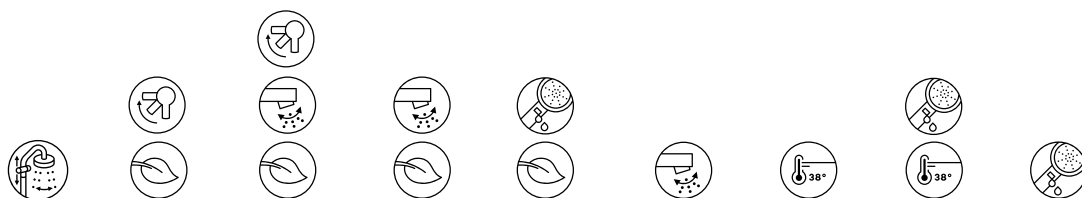

KLUDI ADLON							
KLUDI AMBA							
KLUDI AMEO							
KLUDI A-QA							
KLUDI BALANCE							
KLUDI BINGO STAR							
KLUDI BOZZ							
KLUDI COCKPIT							
KLUDI E2							
KLUDI FIZZ							
KLUDI FRESHLINE							
KLUDI LOGO							
KLUDI MEDI CARE							
KLUDI NOVA FONTE							
KLUDI OBJEKTA							
KLUDI PURE&EASY							
KLUDI PURE&SOLID							
KLUDI PURE&STYLE							
KLUDI PUSH							
KLUDI STANDARD							
KLUDI ZENTA							
KLUDI ZENTA SL							





#### Low pressure

Fitting suitable for under-counter water heaters.



#### Sensor

Fitting with non-contact operation.



#### Battery operation

Electronic fitting with battery operation.



#### Push-fit connector

It just takes one click to fit the end of the hose to the adapter on the mixer body with the push-fit connector.



#### Multi-connector

Fitting with connection for washing machine or dishwasher. Multi-connector makes turning water supply on or off very convenient.



#### Bayonet connection

Fitting suitable for installation very close to a window. The bayonet connection allows the fitting to be retracted and tilted sideways.



#### Hand spray

Fitting with pull-out hand spray, can be switched over from normal flow to spray mode.



#### Pull-out spout

Fitting with pull-out spout for extended working radius.



#### Eco

Saves at least 40 % water




#### Mains operated

Electronic fitting for 230 V AC connection.



#### s-pointer

Angle of water flow can be adjusted to fit different shaped basins.

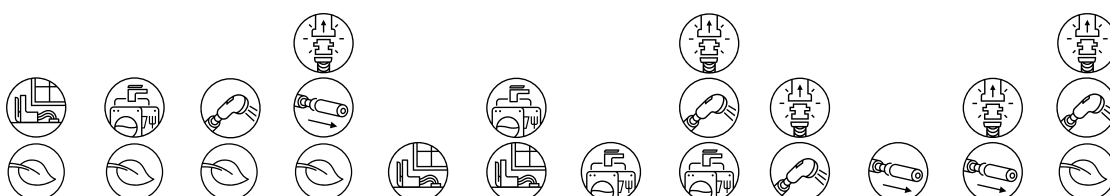

KLUDI BINGO STAR	•	•	•							•	•
KLUDI BINGO STAR XS										•	
KLUDI BOZZ				•							
KLUDI E-GO											
KLUDI L-INE	•	•	•								
KLUDI L-INE S										•	
KLUDI LOGO NEO											
KLUDI MX					•		•	•	•		
KLUDI OBJEKTA					•	•	•		•		•
KLUDI SCOPE					•					•	
KLUDI STANDARD							•				
KLUDI STEEL											
KLUDI TREND			•		•	•	•				
KLUDI ZENTA										•	



# Surfaces

Bathroom	chrome	black* / chrome *≈ RAL 9005	black matt	black matt / chrome	white* / chrome *≈ RAL 9003	gold plated 23 carat
	05	86	39	87	91	45
KLUDI ADLON	•					•
KLUDI AMBA	•					
KLUDI AMEO	•					
KLUDI A-QA	•					
KLUDI BALANCE	•			•	•	
KLUDI BINGO STAR	•					
KLUDI BOZZ	•		•			
KLUDI COCKPIT					•	
KLUDI E2	•					
KLUDI FIZZ	•			•	•	
KLUDI FRESHLINE	•					
KLUDI LOGO	•					
KLUDI MEDI CARE	•					
KLUDI NOVA FONTE	•					
KLUDI OBJEKTA	•					
KLUDI PURE&EASY	•				•	
KLUDI PURE&SOLID	•					
KLUDI PURE&STYLE	•					
KLUDI PUSH	•					
KLUDI STANDARD	•					
KLUDI ZENTA	•	•			•	
KLUDI ZENTA SL	•					



Kitchen	chrome 05	black* / chrome * ≈ RAL 9005 86	black matt / chrome 87	mocca / chrome 82	white* / chrome * ≈ RAL 9010 92	white* / chrome * ≈ RAL 9003 91	white matt / chrome 93	stainless steel brushed F6 / F8	stainless steel look 96
KLUDI BINGO STAR	•								•
KLUDI BINGO STAR XS	•		•				•		
KLUDI BOZZ	•								
KLUDI E-GO	•								
KLUDI L-INE	•								
KLUDI L-INE S	•		•				•		
KLUDI LOGO NEO	•								
KLUDI MX	•			•	•				
KLUDI OBJEKTA	•								
KLUDI SCOPE	•								
KLUDI STANDARD	•								
KLUDI STEEL								•	
KLUDI TREND0	•								•
KLUDI ZENTA	•	•				•			•



## LIST OF ARTICLE NUMBERS

art. no	page	art. no	page	art. no	page
10 020 05 -00	225	20 118 05 15	30	25 125 05 15	122
10 105 05 -00	225	20 118 05 20	32	25 411 05 15	123
10 111 05 -00	225	20 118 05 39	34	25 413 05 15	124
10 250 05 -00	225	20 143 05 15	30	<b>26</b>	
10 255 05 -00	226, 237	20 143 05 20	32	26 101 05 08	124
10 265 05 -00	225	20 143 05 39	34	26 202 05 08	124
10 311 05 -00	226	20 144 05 15	30	26 202 05 15	124
10 361 05 -00	226	20 144 05 20	32	26 209 05 08	123
10 411 35 -00	224	20 144 05 39	34	<b>27</b>	
10 424 05 -00	224	20 146 05 15	30	27 051 05	160
10 427 05 -00	224	20 146 05 20	32	27 051 45	160
10 428 05 -00	224	20 146 05 39	34	27 103 05	160
10 432 05 -00	226	20 407 05 08	122	27 103 45	160
10 462 05 -00	226	20 407 05 15	122	27 105 05	160
10 499 05 -00	227	20 540 05 15	31	27 105 45	160
10 772 00 -00	229	20 540 05 20	33	27 510 05	160
<b>11</b>		20 540 05 39	35	27 510 45	160
11 001 05 15	275	20 710 05 15	31	27 514 05	160
11 002 05 15	275	20 710 05 20	33	27 514 45	160
11 003 05 08	275	20 710 05 39	35	27 652 05	191
11 004 05 08	276	20 840 05 -15	162	<b>29</b>	
11 103 05 15	275	20 840 05 -25	162	29 209	137
11 402 35 -00	224	20 840 05 -35	163	29 211	137
<b>12</b>		20 850 05 -15	163	29 213	137
12 003 05	126	20 850 05 -25	164	29 215	138
12 101 05 -00	161	20 850 05 -35	164	29 509	138
12 101 45 -00	161	<b>21</b>		29 511	139
<b>13</b>		21 035 05 15	121	29 513	139
13 500 05	94	21 037 05 15	121	29 527	139
13 501 05	95	21 058 05 15	121	29 747	136
13 502 05	124	21 060 05 15	121	29 751 00	137
<b>14</b>		21 062 05 15	121	29 757	136
14 203 05 19	125	21 080 00 -00	231	29 809	138
14 303 05 08	125	21 091 00 -00	231	29 811	138
14 303 05 15	125	21 315 00 -00	229	29 911	139
<b>15</b>		21 406 05 -00	230	<b>30</b>	
15 845 05 -00	131	21 407 05 -00	230	30 015 05 15	264
15 846 05 -00	131	21 408 05 -00	230	30 025 05 08	264
<b>16</b>		21 409 05 -00	230	30 405 05 15	264
16 021 05	142	21 520 00 -00	232	<b>31</b>	
16 021 45	142	<b>25</b>		31 052 05 08	263
16 024 05	142	25 001 05 08	122	31 052 05 15	263
16 203 05 -00	28	25 001 05 15	122	31 053 05 08	263
16 203 45 -00	28	25 007 05 15	123	31 053 05 15	263
<b>20</b>		25 101 05 15	123	31 055 05 08	264
20 013 05 08	122	25 111 05 15	123	31 453 05 15	264
20 013 05 15	122	25 125 05 08	122	31 623 05 15	262





## LIST OF ARTICLE NUMBERS

art. no	page
31 656 05 15	263
31 658 05 15	262
31 710 05 15	262
31 711 05 15	262
31 730 05 15	262
31 920 05 15	263
31 921 05 15	263
<b>32</b>	
32 004 05 08	122, 236
32 023 05 75	98
32 024 05 75	99
32 126 05 75	98
32 233 05 75	98
32 234 05 75	98
32 260 05 75	98
32 393 05 75	99
32 416 05 75	99
32 425 05 75	100
32 491 05 75	100
32 574 05 75	254
32 575 05 75	254
32 576 05 75	254
32 577 05 75	254
32 578 05 75	254
32 581 05 75	255
32 615 05 75	101
32 650 05 75	101
32 653 05 75	99
32 655 05 75	103
32 657 05 75	102
32 685 05 75	101
32 764 05 75	102
32 818 05 75	103
32 881 05 75	255
32 882 05 75	255
<b>33</b>	
33 434	133
33 574 05 75	256
33 574 96 75	256
33 575 05 75	256
33 575 96 75	256
33 576 05 75	256
33 576 96 75	256
33 577 05 75	256
33 578 05 75	256
33 578 96 75	256
33 579 05 75	257

art. no	page
33 581 05 75	257
33 581 96 75	257
33 930 05 75	258
33 931 05 75	258
33 932 05 75	259
33 933 05 75	258
33 938 05 75	258
33 939 05 75	258
<b>34</b>	
34 024 05 75	111
34 025 05 75	111
34 028 05 75	110
34 112 05 24	234
34 112 05 34	235
34 113 05 24	234
34 113 05 34	235
34 115 05 24	234
34 216 05 75	112
34 217 05 75	112
34 276 05 75	110
34 290 05 75	110
34 292 05 75	111
34 382 05 75	110
34 385 05 75	110
34 394 05 75	111
34 419 05 75	113
34 420 05 75	114
34 423 05 75	112
34 650 05 75	113
34 655 05 75	113
34 657 05 75	113
34 681 05 75	112
34 841 05 75	113
34 908 05 24	234
34 908 05 34	234
34 920 05 24	235
34 921 05 24	235
34 922 05 24	235
<b>35</b>	
35 002 05 38	145
35 085 05 64	236
35 093	136
35 100 05 38	95, 145
35 100 86 38	95, 145
35 100 91 38	95, 145
35 101 05 38	92, 145
35 101 86 38	92, 145

art. no	page
35 101 91 38	92, 145
35 156	135
35 158	135
35 200 05 38	102, 145
35 201 05 38	100, 144
35 203 05 38	74, 144
35 250 05 75	57, 144
35 330 05 38	236
35 730 05 38	103
35 830 05 38	102, 149
35 835 05 38	103, 149
<b>36</b>	
36 489 05 75	101
36 651 05 75	103
<b>37</b>	
37 023 05 65	118
37 024 05 65	118
37 028 05 65	116
37 028 91 65	116
37 190 05 65	117
37 259 05 65	118
37 275 05 65	117
37 276 05 65	116
37 282 05 65	115
37 284 05 65	116
37 285 05 65	115
37 286 05 65	116
37 287 05 65	117
37 289 05 65	116
37 290 05 65	117
37 290 91 65	117
37 292 05 65	117
37 292 91 65	117
37 382 05 65	115
37 382 91 65	115
37 385 05 65	115
37 387 05 65	115
37 419 05 65	119
37 420 05 65	120
37 533 05 65	118
37 533 91 65	118
37 534 05 65	118
37 591 05 65	119
37 592 05 65	119
37 650 05 65	119
37 655 05 65	120
37 657 05 65	120



## LIST OF ARTICLE NUMBERS

art. no	page
37 681 05 65	119
37 681 91 65	119
37 841 05 65	120
37 841 91 65	120
37 913 05 75	260
37 914 05 75	260
37 919 05 75	260
37 924 05 75	260
<b>38</b>	
38 001	96
38 002	96
38 003	96
38 004	96
38 016 05 30	72
38 017 05 30	71
38 018 05 30	71
38 100 05	85
38 102 05	84
38 105 05	85
38 116 05 30	72, 91
38 145 05 20	71
38 145 05 76	70
38 146 05 20	70
38 146 05 76	70
38 200 05	84
38 202 05	83
38 205 05	85
38 242	131
38 243	131
38 244 05 75	87
38 244 05 76	71
38 245 05 75	87
38 245 05 76	71
38 250 05 75	82
38 250 86 75	82
38 250 91 75	82
38 251 05 75	82
38 251 86 75	82
38 251 91 75	82
38 253 05 75	82
38 255 05 75	86
38 256 05 75	86
38 257 05 75	86
38 260 05 75	82
38 260 86 75	82
38 260 91 75	82
38 262 05 75	82

art. no	page
38 263 05 76	68
38 264 05 75	83
38 265 05 75	83
38 266 05 76	68
38 266 39 76	68
38 270 05 76	68
38 272 05 76	68
38 272 39 76	68
38 277 05 76	68
38 280 05 76	69
38 282 05 76	69
38 282 39 76	69
38 286 05 76	70
38 288 05 76	69
38 288 39 76	69
38 294 05 75	85
38 294 05 76	69
38 393 05 20	70
38 393 05 75	87
38 393 05 76	69
38 400 05	88
38 401 05	90
38 402 05	89
38 403 05	91
38 424 05 20	73
38 424 05 75	93
38 424 05 76	73
38 446 05 75	93
38 447 05 75	92
38 500 05	88
38 501 05	90
38 502 05	89
38 503 05	91
38 505 05	74
38 505 39	74
38 530 05 75	92
38 530 91 75	92
38 533 05 76	72
38 533 39 76	72
38 601 05 38	128
38 602 05 38	129
38 603 05 38	128
38 604 05 38	129
38 611 05 38	128
38 612 05 38	129
38 625	133
38 636	133

art. no	page
38 650 05 75	93
38 650 05 76	73
38 650 39 76	73
38 650 86 75	93
38 650 91 75	93
38 655 05 75	95
38 655 05 76	74
38 655 39 76	74
38 657 05 75	94
38 657 05 76	74
38 657 39 76	74
38 660 05 75	94
38 660 86 75	94
38 660 91 75	94
38 670 05 75	92
38 670 86 75	92
38 670 91 75	92
38 691 05 76	72
38 691 39 76	72
38 801 05 38	128, 146
38 802 05 38	129, 146
38 803 05 38	128, 146
38 811 05 38	129, 146
38 812 05 38	130, 146
38 828	134
38 830 05 45	94, 150
38 831 05 76	74
38 831 39 76	74
38 835 05 45	96, 150
38 860 05 75	95
38 860 86 75	95
38 860 91 75	95
38 870 05 75	95
38 870 86 75	95
38 870 91 75	95
38 973 05 75	253
38 973 86 75	253
38 973 91 75	253
38 973 96 75	253
38 979 05 75	253
<b>39</b>	
39 100 05 -00	184
39 120 05 -00	163
39 904 05 62	243
39 904 82 62	243
39 904 92 62	243
39 905 05 62	243



## LIST OF ARTICLE NUMBERS

art. no	page
39 906 05 62	243
39 906 82 62	243
39 906 92 62	243
39 907 05 62	243
39 934 05 62	243
39 941 05 62	244
39 941 82 62	244
39 941 92 62	244
39 942 05 62	244
39 945 05 62	244
39 945 82 62	244
39 945 92 62	244
<b>40</b>	
40 024 05 75	106
40 025 05 75	106
40 028 05 75	105
40 216 05 75	107
40 217 05 75	107
40 290 05 75	105
40 292 05 75	105
40 296 05 75	106
40 382 05 75	105
40 385 05 75	105
40 393 05 75	106
40 419 05 75	108
40 420 05 75	109
40 425 05 75	107
40 650 05 75	108
40 655 05 75	109
40 657 05 75	108
40 681 05 75	107
40 803 05 75	248
40 841 05 75	108
40 851 05 75	248
40 851 87 75	248
40 851 93 75	248
<b>41</b>	
41 023 05 75	59
41 024 05 75	60
41 025 05 75	60
41 026 05 75	59
41 028 05 75	59
41 029 05 75	59
41 216 05 75	62
41 244 05 75	61
41 245 05 75	61
41 276 05 75	59

art. no	page
41 296 05 75	60
41 298 05 75	60
41 393 05 30	62
41 393 05 75	61
41 424 05 30	64
41 424 05 75	64
41 445 05 75	62
41 447 05 75	63
41 448 05 75	63
41 505 05	65
41 515 05 75	65
41 650 05 75	64
41 655 05 75	66
41 657 05 75	65
41 671 05 75	62
41 675 05 75	66
41 710 05 75	66
41 718 05 75	66
41 830 05 75	65, 149
41 835 05 75	66, 149
<b>42</b>	
42 023 05 78	67
42 025 05 75	86
42 026 05 75	86
42 030 05 78	67
42 200 05 75	240
42 205 05 75	241
42 210 05 75	240
42 215 05 75	241
42 803 05 76	252
42 803 05 78	249
42 803 96 78	249
42 809 05 78	249
42 809 96 78	249
42 814 05 77	246
42 816 05 77	246
42 817 05 77	246
42 819 05 77	246
42 821 05 77	246
42 836 05 78	249
42 851 05 76	252
42 851 05 78	249
42 851 96 78	249
42 852 05 78	250
42 854 05 77	247
42 855 05 78	250
42 857 05 78	249

art. no	page
42 857 96 78	249
42 859 05 78	250
<b>44</b>	
44 850 F8 60	242
44 851 F8 60	242
<b>46</b>	
46 803 05 78	251
46 851 05 78	251
46 851 87 78	251
46 851 93 78	251
<b>48</b>	
48 027 05 65	76
48 028 05 65	76
48 244 05 65	77
48 245 05 65	77
48 247 05 65	77
48 248 05 65	77
48 256 05 65	77
48 260 05 65	75
48 262 05 65	75
48 263 05 65	75
48 266 05 65	75
48 277 05 65	75
48 290 05 65	76
48 292 05 65	76
48 298 05 65	76
48 393 05 65	78
48 424 05 65	80
48 448 05 65	79
48 530 05 65	78
48 590 05 65	79
48 600 05	80
48 650 05 65	80
48 655 05 65	81
48 657 05 65	80
48 670 05 65	78
48 870 05 65	81
<b>49</b>	
49 023 05 75	44
49 095 05 -00	175, 204
49 191 05 -00	175, 209
49 216 05 75	45
49 244 05 75	45
49 245 05 75	45
49 295 05 75	44
49 296 05 75	44
49 297 05 75	44



## LIST OF ARTICLE NUMBERS

art. no	page
49 298 05 75	44
49 402 05 -00	181
49 426 05 75	47
49 445 05 75	45
49 447 05 75	46
49 503 05	48
49 515 05 75	47
49 590 05 75	46
49 650 05 75	47
49 655 05 75	49
49 657 05 75	48
49 714 05 75	48
49 718 05 75	49
49 729 05 75	49, 148
49 815 05 75	50
49 830 05 75	48, 148
49 835 05 75	49, 148
49 846 05 75	49
49 847 05 75	50
49 971 05	157
49 972 05	157
49 974 05	157
49 975 05	155
49 976 05	155
49 977 05	156
49 979 05	156
49 980 05	157
49 981 05	157
49 982 05	155
49 983 05	156
49 984 05	156
49 985 05	155
49 987 05	155
49 990 05	156
<b>51</b>	
51 010 05 20	22
51 010 05 G5	22
51 010 45 20	22
51 010 45 G4	22
51 012 05 20	22
51 012 45 20	22
51 014 05 20	23
51 043 05 20	23
51 043 05 G5	23
51 043 45 20	23
51 043 45 G4	23
51 046 05 20	22

art. no	page
51 046 05 G5	22
51 046 45 20	22
51 046 45 G4	22
51 211 05 20	23
51 211 45 20	23
51 407 05	26
51 441 05 20	23
51 441 45 20	23
51 524 05 20	24
51 524 05 G5	25
51 524 45 20	24
51 524 45 G4	25
51 525 05 20	24
51 525 45 20	24
51 610 05 20	26
51 610 05 G5	26
51 610 45 20	26
51 610 45 G4	26
51 719 05 20	26, 147
51 719 45 20	26, 147
51 720 05 20	26, 147
51 720 05 G5	27, 147
51 720 45 20	26, 147
51 720 45 G4	27, 147
51 803 05 20	28
51 803 45 20	28
51 815 05 20	27
51 815 45 20	27
51 816 05 20	27
51 816 45 20	27
51 817 05 20	25
51 817 45 20	25
51 818 05 20	25
51 818 45 20	25
51 843 05 20	28
51 843 45 20	28
51 845 05 20	28
51 845 45 20	28
51 848 05 20	25
51 848 45 20	25
<b>52</b>	
52 023 05 75	51
52 023 87 75	51
52 023 91 75	51
52 026 05 75	51
52 026 87 75	51
52 026 91 75	51

art. no	page
52 100 05	52
52 100 91	52
52 105 05	53
52 200 05	51
52 200 91	51
52 202 05	52
52 216 05 75	54
52 216 87 75	54
52 216 91 75	54
52 246 05 75	54
52 246 87 75	54
52 246 91 75	54
52 247 05 75	53
52 247 87 75	53
52 296 05 75	53
52 296 87 75	53
52 296 91 75	53
52 298 05 75	53
52 298 87 75	53
52 298 91 75	53
52 445 05 75	54
52 445 87 75	54
52 445 91 75	54
52 447 05 75	55
52 447 87 75	55
52 447 91 75	55
52 448 05 75	55
52 503 05	56
52 503 87	56
52 503 91	56
52 515 05 75	56
52 590 05 75	54
52 590 87 75	54
52 590 91 75	54
52 650 05 75	55
52 650 87 75	55
52 650 91 75	55
52 655 05 75	57
52 655 87 75	57
52 655 91 75	57
52 657 05 75	56
52 710 05 75	57
52 710 87 75	57
52 710 91 75	57
52 718 05 75	57
52 729 05 75	58, 149
52 729 87 75	58, 149



## LIST OF ARTICLE NUMBERS

art. no	page
52 729 91 75	58, 149
52 815 05 75	58
52 815 87 75	58
52 815 91 75	58
52 830 05 75	56, 148
52 830 87 75	56, 148
52 830 91 75	56, 148
52 835 05 75	57, 148
52 835 87 75	57, 148
52 846 05 75	58
52 846 87 75	58
52 846 91 75	58
52 847 05 75	58
52 847 87 75	58
52 847 91 75	58
<b>53</b>	
53 023 05 75	36
53 026 05 75	36
53 028 05 75	36
53 029 05 75	36
53 216 05 75	38
53 244 05 75	37
53 245 05 75	37
53 296 05 75	37
53 298 05 75	36
53 401 05 38	38, 144
53 445 05 75	38
53 447 05 75	39
53 448 05 75	40
53 515 05 75	40
53 590 05 75	39
53 650 05 75	40
53 655 05 75	41
53 657 05 75	41
53 710 05 75	41
53 718 05 75	42
53 729 05 75	42, 147
53 811	138
53 815 05 75	42
53 830 05 75	41, 147
53 846 05 75	42
53 847 05 75	42
53 971 05	153
53 972 05	154
53 974 05	153
53 975 05	152
53 976 05	152

art. no	page
53 977 05	152
53 979 05	153
53 980 05	153
53 981 05	153
53 984 05	152
53 985 05	152
<b>60</b>	
60 480 05 -00	214
60 531 05 -00	214
60 537 05 -00	214
60 539 05 -00	214
60 540 05 -00	215
60 576 05 -00	188
60 577 05 -00	187
60 600 05 -00	190
60 610 05 -00	189
60 630 05 -00	189
60 640 05 -00	189
60 650 05 -00	191
60 660 91 -00	191
60 700 05 -00	190
60 730 05 -00	189
60 740 05 -00	189
60 750 05 -00	191
60 800 05 -00	190
60 830 05 -00	188
60 840 05 -00	188
60 840 86 -00	188
60 840 91 -00	188
60 850 91 -00	188
<b>61</b>	
61 006 05 -00	217
61 007 05 -00	217
61 055 05 -00	217
61 056 05 -00	218
61 057 05 -00	218
61 071 05 -00	217
61 071 87 -00	217
61 071 91 -00	217
61 072 05 -00	217
61 072 87 -00	217
61 072 91 -00	217
61 083 05 -00	182
61 101 21 -00	215
61 150 00 -00	229
61 502 05 -00	236
61 503 05 -00	237

art. no	page
61 505 05 -00	237
61 506 05 -00	237
<b>62</b>	
62 095 05 -00	183
62 119 05 -00	215
62 191 05 -00	182
62 353 05 -00	220
62 391 05 -00	181
62 535 05 -00	216
<b>63</b>	
63 050 05 -00	214
63 050 43 -00	214
63 060 05 -00	215
63 060 39 -00	215
63 060 43 -00	215
63 061 05 -00	215
63 061 39 -00	215
63 061 43 -00	215
<b>64</b>	
64 101 10 -00	203
64 320 05 -00	178
64 325 05 -00	178
64 325 87 -00	178
64 325 91 -00	178
64 330 05 -00	178
64 330 87 -00	178
64 330 91 -00	178
64 340 05 -00	179
64 340 87 -00	179
64 340 91 -00	179
64 400 05 -00	170
64 420 05 -00	179
64 425 05 -00	179
64 425 91 -00	179
64 430 05 -00	179
64 430 91 -00	179
64 440 05 -00	179
64 440 91 -00	179
64 450 05 -00	171
64 500 05 -00	173
64 520 05 -00	180
64 530 05 -00	180
64 530 91 -00	180
64 552 05 -00	174
64 870 05 -00	178
64 880 05 -00	178
64 880 87 -00	178



## LIST OF ARTICLE NUMBERS

art. no	page	art. no	page	art. no	page
64 880 91 -00	178	66 541 05 -00	181	67 940 91 -00	171
<b>65</b>		66 543 05 -00	219	67 950 05 -00	174
65 540 05 -00	221	66 544 05 -00	219	67 950 91 -00	174
65 540 43 -00	221	66 545 05 -00	219	<b>68</b>	
65 543 05 -00	221	<b>67</b>		68 010 05 -00	201
65 543 43 -00	221	67 083 05 -00	167	68 030 05 -00	201
65 544 05 -00	185	67 090 05 -00	170, 210	68 060 05 -00	201
65 545 05 -00	185	67 091 05 -00	166, 212	68 083 05 -00	195, 208
65 551 05 -00	221	67 092 05 -00	170, 210	68 085 05 -00	194, 208
65 551 43 -00	221	67 093 05 -00	166, 212	68 090 05 -00	201
65 560 05 -00	185	67 095 05 -00	165, 211	68 091 05 -00	192, 207
65 561 05 -00	185	67 096 05 -00	165, 211	68 092 05 -00	192, 205
65 562 05 -00	185	67 511 05 -00	171	68 093 05 -00	194, 207
65 600 05 -00	184	67 575 05 -00	167	68 094 05 -00	193, 206
65 630 05 -00	183	67 578 05 -00	166	68 095 05 -00	193, 206
65 641 05 -00	183	67 600 05 -00	168	68 096 05 -00	199
65 650 05 -00	183	67 600 39 -00	168	68 097 05 -00	195
65 670 05 -00	184	67 640 05 -00	167	68 100 05 -00	198
65 700 05 -00	184	67 640 87 -00	167	68 160 05 -00	200
65 730 05 -00	182	67 640 91 -00	167	68 190 05 -00	200
65 740 05 -00	182	67 650 05 -00	169	68 300 05 -00	197
65 750 05 -00	183	67 650 87 -00	169	68 360 05 -00	199
<b>66</b>		67 650 91 -00	169	68 363 05 -00	199
66 081 05 -00	177, 209	67 670 05 -00	169	68 390 05 -00	198
66 090 05 -00	187, 213	67 670 91 -00	169	68 393 05 -00	198
66 091 05 -00	177, 209	67 700 05 -00	168	68 575 05 -00	197
66 095 05 -00	176, 204	67 700 39 -00	168	68 576 05 -00	196
66 140 05 -00	182	67 700 43 -00	168	68 577 05 -00	196
66 192 05 -00	177	67 740 05 -00	167	68 578 05 -00	197
66 195 05 -00	176, 205	67 740 87 -00	167	68 642 05 -00	200
66 510 05 -00	180	67 740 91 -00	167	68 670 05 -00	202
66 511 05 -00	180	67 750 05 -00	168	<b>70</b>	
66 513 05 -00	219	67 750 87 -00	168	70 345 05 -00	228
66 514 05 -00	219	67 750 91 -00	168	70 346 05 -00	228
66 514 87 -00	219	67 800 05 -00	173	70 420 05 -00	186
66 514 91 -00	219	67 800 43 -00	173	70 430 05 -00	186
66 515 05 -00	220	67 830 05 -00	173	<b>71</b>	
66 515 87 -00	220	67 840 05 -00	172	71 080 05 -00	230
66 515 91 -00	220	67 840 91 -00	172	71 337 05 -00	216
66 521 05 -00	180	67 850 05 -00	174	71 370 05 -00	231
66 530 05 -00	181	67 850 91 -00	174	71 520 05 -00	231
66 531 05 -00	181	67 870 05 -00	174	71 826 05 -00	229
66 533 05 -00	220	67 870 91 -00	174	<b>72</b>	
66 534 05 -00	220	67 900 05 -00	173	72 956 00 -00	231
66 534 91 -00	220	67 900 43 -00	173	<b>73</b>	
66 535 05 -00	220	67 930 05 -00	172	73 006 00 -00	132
66 535 91 -00	220	67 940 05 -00	171	73 018 05 -00	257



## LIST OF ARTICLE NUMBERS

art. no	page
73 018 96 -00	257
73 038 05 -00	250
73 038 96 -00	250
73 073 05 -00	43
73 074 05 -00	43
73 076 05 -00	43
73 390 05 -00	283
73 575 00 -00	134
<b>74</b>	
74 001 00 -00	132
74 030 05 -00	245
74 030 19 -00	245
74 030 36 -00	245
74 129 00 -00	278
74 233 05 -00	133
74 266 00 -00	285
74 329 00 -00	274
74 366 00 -00	280
74 370 05 -00	282
74 440 00 -00	276
74 441 00 -00	277
74 470 00 -00	281
74 518 05 -00	257
74 518 96 -00	257
74 580 00 -00	132
74 598 00 -00	278
74 669 05 -00	97
74 669 86 -00	97
74 669 91 -00	97
74 700 05 -00	97
74 700 86 -00	97
74 700 91 -00	97
74 750 00 -00	280
74 805 00 -00	279
74 809 00 -00	281
74 839 05 -00	282
74 868 00 -00	279
74 869 05 -00	221
74 872 05 -00	253
74 872 86 -00	253
74 872 91 -00	253
74 872 96 -00	253
74 883 00 -00	285
74 884 05 -00	245
74 884 19 -00	245
74 884 36 -00	245
74 892 05 -00	247, 252

art. no	page
74 895 05 -00	241
74 927 00 -00	281
74 947 00 -00	280
74 950 05 -00	261
74 989 05 -00	58
74 989 39 -00	58
74 989 43 -00	58
<b>75</b>	
75 010 05 -00	259
75 025 00 -00	277
75 047 05 -00	104
75 048 05 -00	104
75 054 00 -00	276
75 055 00 -00	276
75 068 05 -00	282
75 079 05 -00	139
75 201 00 -00	278
75 205 05 -00	282
75 218 00 -00	276
75 260 05 -00	283
75 263 00 -00	281
75 300 05 -00	29
75 300 45 -00	29
75 301 05 -00	29
75 301 45 -00	29
75 312 00 -00	274
75 336 05 -00	29
75 336 45 -00	29
75 375 05 -00	283
75 404 05 -00	266
75 406 05 -00	267
75 407 05 -00	266
75 408 05 -00	266
75 409 05 -00	266
75 410 05 -00	266
75 413 05 -00	267
75 418 05 -00	267
75 421 05 -00	126, 265
75 422 05 -00	126, 265
75 484 00 -00	274
75 526 00 -00	277
75 567 05 -00	267
75 570 00 -00	277
75 571 00 -00	277
75 605 00 -00	279
75 607 00 -00	279
75 638 05 -00	238

art. no	page
75 667 05 -00	282
75 727 05 -00	136
75 730 05 -00	135
75 731 05 -00	135
75 810 00 -00	279
75 895 05 -00	283
75 980 05 -00	134
75 981 05 -00	134
75 982 05 -00	126
75 997 00 -00	274
<b>76</b>	
76 071 05 -00	97
76 148 46 -00	142
76 149 46 -00	142
76 156 05 -00	142
76 156 45 -00	142
76 360 05 -00	126, 265
76 361 05 -00	127, 265
76 390 00 -00	281
76 400 00 -00	278
76 416 05 -00	283
76 424 00 -00	133
76 539 00 -00	132
76 552 04 -00	284
76 619 00 -00	280
76 661 00 -00	134
76 729 00 -00	280
76 760 05 -00	260
76 837 00 -00	274
76 856 00 -00	278
76 942 05 -00	238
76 943 05 -00	238
<b>78</b>	
78 119 05 -00	245
78 122 00 -00	275
78 333 05 -00	221
78 421 05 -00	259
78 782 05 -00	140
78 794 05 -00	140
78 802 05 -00	141
78 812 05 -00	141
<b>80</b>	
80 050 05 -00	203
80 200 91 -00	203
<b>82</b>	
820 272 35-00	228
823 085 05-00	229



## LIST OF ARTICLE NUMBERS

art. no	page
<b>83</b>	
830 126 05-00	216
830 274 00-00	285
830 288 00-00	285
830 313 05-00	216
<b>84</b>	
845 008 05-00	228
845 016 05-00	227
845 025 05-00	227
845 066 05-00	227
845 146 05-00	227
<b>88</b>	
88 011	131
88 088	132
<b>92</b>	
920 699 05-00	253
929 032 00-00	284
929 073 00-00	284

art. no	page
929 077 00-00	284
929 128 00-00	284
<b>93</b>	
930 989 05-00	186
930 990 05-00	186





# Bathroom fittings



**KLUDI ADLON**  
22



**KLUDI NOVA FONTE**  
30



**KLUDI AMBA**  
36



**KLUDI E2**  
44



**KLUDI BALANCE**  
51



**KLUDI AMEO**  
59



**KLUDI BINGO STAR**  
67



**KLUDI BOZZ**  
68



**KLUDI ZENTA SL**  
75



**KLUDI ZENTA**  
82



**KLUDI OBJEKTA**  
98



**KLUDI PURE&STYLE**  
105



**KLUDI PURE&SOLID**  
110



**KLUDI PURE&EASY**  
115



**KLUDI STANDARD**  
121



**KLUDI PUSH**  
128



**Pre-installation sets**  
131

## Electronic fittings













**KLUDI BALANCE E**  
51 – 53



**KLUDI ZENTA E**  
83 – 91













## KLUDI ADLON

product		product description	surface	Art.-Nr.
Basin		 <p><b>KLUDI ADLON basin mixer DN 15</b> cross handles single hole mounted flow rate 14 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	<b>510120520</b> <b>510124520</b>
		 <p><b>KLUDI ADLON basin mixer DN 15</b> cross handles single hole mounted flow rate 13,5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	<b>510100520</b> <b>510104520</b>
		 <p><b>KLUDI ADLON basin mixer DN 15</b> crystal handles "Made with Swarovski® Elements" single hole mounted flow rate 13,5 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm</p>	chrome gold plated 23 carat	<b>5101005G5</b> <b>5101045G4</b>
		 <p><b>KLUDI ADLON basin mixer DN 15</b> cross handles three hole assembling flow rate 12,2 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm pop-up waste G 1 1/4 projection 145 mm</p>	chrome gold plated 23 carat	<b>510460520</b> <b>510464520</b>
		 <p><b>KLUDI ADLON basin mixer DN 15</b> crystal handles "Made with Swarovski® Elements" three hole assembling flow rate 12,2 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm pop-up waste G 1 1/4 projection 145 mm</p>	chrome gold plated 23 carat	<b>5104605G5</b> <b>5104645G4</b>


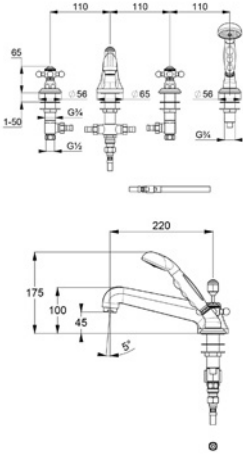

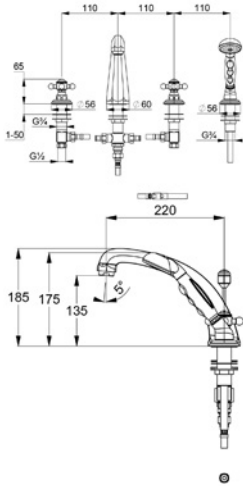


## KLUDI ADLON

product		product description	surface	Art.-Nr.
		<b>KLUDI ADLON basin mixer DN 15</b> cross handles three hole assembling flow rate 12,2 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm pop-up waste G 1 1/4 projection 150 mm	chrome	<b>510430520</b>
			gold plated 23 carat	<b>510434520</b>
		<b>KLUDI ADLON basin mixer DN 15</b> crystal handles "Made with Swarovski® Elements" three hole assembling flow rate 12,2 l/min at 3 bar cascade aerator M 24 x 1 ceramic headpart 180° flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm pop-up waste G 1 1/4 projection 150 mm	chrome	<b>5104305G5</b>
			gold plated 23 carat	<b>5104345G4</b>
		<b>KLUDI ADLON pillar valve DN 15</b> cross handle single hole mounted ceramic headpart 180° flow rate 15 l/min at 3 bar marking: COLD	chrome	<b>510140520</b>
<b>Bidet</b> 		<b>KLUDI ADLON bidet mixer DN 15</b> cross handles single hole mounted flow rate 15 l/min at 3 bar ball joint-cascade-aerator M 24 x 1 ceramic headpart 180° pop-up waste G 1 1/4 copper tubes 10 mm	chrome	<b>512110520</b>
<b>Bath</b> 		<b>KLUDI ADLON bath- and shower mixer DN 15</b> cross handles wall fastening flow class B/B cascade aerator M 28 x 1 ceramic headpart 180° manual diverter shower/bathtub s-connections with shower set	chrome	<b>514410520</b>
			gold plated 23 carat	<b>514414520</b>


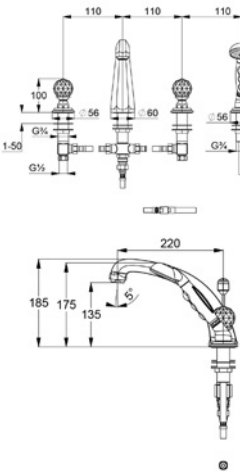








## KLUDI ADLON

product	product description	surface	Art.-Nr.
	<b>KLUDI ADLON bath- and shower mixer DN 15</b> stand assembly four hole tiles deck mounted installation cross handles flow class B/B cascade aerator M 28 x 1 ceramic headpart 180° autom. diverter shower/bathtub retractable hand shower high pressure supply hose G 1/2 x G 1/2 x 400 mm protected against back flow	chrome gold plated 23 carat	<b>515250520</b> <b>515254520</b>
	 <b>required accessories:</b> mounting plate pre-installation set for four hole mixer  KLUDI ROTEXA bath rim assembly kit		<b>7614846-00</b>  <b>7878205-00</b>
	<b>KLUDI ADLON bath- and shower mixer DN 15</b> stand assembly four hole tiles deck mounted installation cross handles flow class B/B cascade aerator M 28 x 1 ceramic headpart 180° autom. diverter shower/bathtub retractable hand shower shower hose G 1/2 x G 1/2 x 1500 mm flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm protected against back flow	chrome gold plated 23 carat	<b>515240520</b> <b>515244520</b>
	 <b>required accessories:</b> mounting plate pre-installation set for four hole mixer  KLUDI ROTEXA bath rim assembly kit		<b>7614846-00</b>  <b>7878205-00</b>















## KLUDI ADLON

product	product description	surface	Art.-Nr.
	 <p><b>KLUDI ADLON bath- and shower mixer DN 15</b> stand assembly four hole tiles deck mounted installation crystal handles "Made with Swarovski® Elements" flow class B/B cascade aerator M 28 x 1 ceramic headpart 180° autom. diverter shower/bathtub retractable hand shower shower hose G 1/2 x G 1/2 x 1500 mm flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm protected against back flow</p> <p><b>required accessories:</b> mounting plate pre-installation set for four hole mixer</p> <p>KLUDI ROTEXA bath rim assembly kit</p>	chrome gold plated 23 carat	<b>5152405G5</b> <b>5152445G4</b>
	 <p><b>KLUDI ADLON angle valve DN 15</b> cross handle stand assembly ceramic headpart 180° flow class B marking: COLD</p>	chrome gold plated 23 carat	<b>518170520</b> <b>518174520</b>
	 <p><b>KLUDI ADLON angle valve DN 15</b> cross handle stand assembly ceramic headpart 180° flow class B marking: HOT</p>	chrome gold plated 23 carat	<b>518180520</b> <b>518184520</b>
	 <p><b>KLUDI ADLON two-way diverter DN 15</b> cross handle stand assembly head part 360° flow class C/B marking: neutral tub spout G 3/4 shower outlet G 1/2 2 connections G 1/2</p>	chrome gold plated 23 carat	<b>518480520</b> <b>518484520</b>










## KLUDI ADLON

product		product description	surface	Art.-Nr.
		<b>KLUDI ADLON bath filler DN 20</b> wall fastening flow class B cascade aerator M 28 x 1 seperate DN 20 connector for pre-installation	chrome	<b>5140705</b>
<b>Shower</b>				
		<b>KLUDI ADLON shower mixer DN 15</b> cross handles wall fastening flow class B ceramic headpart 180° s-connections shower outlet G 1/2	chrome gold plated 23 carat	<b>516100520</b> <b>516104520</b>
		<b>KLUDI ADLON shower mixer DN 15</b> crystal handles "Made with Swarovski® Elements" wall fastening flow class B ceramic headpart 180° s-connections shower outlet G 1/2	chrome gold plated 23 carat	<b>5161005G5</b> <b>5161045G4</b>
		<b>KLUDI ADLON concealed thermostatic mixer</b> concealed trim-set hot water safety device 40 °C without shut-off valve  <b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15	chrome gold plated 23 carat 	<b>517190520</b> <b>517194520</b>  <b>35158</b>
		<b>KLUDI ADLON concealed thermostatic mixer</b> concealed trim-set hot water safety device 40 °C with shut-off valve  <b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15	chrome gold plated 23 carat 	<b>517200520</b> <b>517204520</b>  <b>35156</b>









## KLUDI ADLON

product		product description	surface	Art.-Nr.
 		<b>KLUDI ADLON concealed thermostatic mixer</b> concealed trim-set crystal handles "Made with Swarovski® Elements" hot water safety device 40 °C with shut-off valve	chrome gold plated 23 carat 	<b>5172005G5</b> <b>5172045G4</b>
		<b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15		<b>35156</b>
 		<b>KLUDI ADLON concealed valve, trim set</b> set 2 – trim set cross handle consisting of: handle, sleeve, rosette adjustable extension marking: COLD	chrome gold plated 23 carat	<b>518150520</b> <b>518154520</b>
		<b>required accessories:</b> concealed valve DN 15 connection G 1/2		<b>29809</b>
		concealed valve DN 20 connection G 3/4		<b>29811</b>
 		concealed valve DN 20 soldered connection 22 mm		<b>29911</b>
		<b>KLUDI ADLON concealed valve, trim set</b> set 2 – trim set cross handle consisting of: handle, sleeve, rosette adjustable extension marking: HOT	chrome gold plated 23 carat	<b>518160520</b> <b>518164520</b>
		<b>required accessories:</b> concealed valve DN 15 connection G 1/2		<b>29809</b>
		concealed valve DN 20 connection G 3/4		<b>29811</b>
		concealed valve DN 20 soldered connection 22 mm		<b>29911</b>









## KLUDI ADLON

product	product description	surface	Art.-Nr.
 	<b>KLUDI ADLON concealed valve, trim set</b> set 2 – trim set cross handle consisting of: handle, sleeve, rosette adjustable extension marking: neutral	chrome gold plated 23 carat	<b>518030520</b> <b>518034520</b>
	<b>required accessories:</b> concealed valve DN 15 connection G 1/2		<b>29809</b>
	concealed valve DN 20 connection G 3/4		<b>29811</b>
	concealed valve DN 20 soldered connection 22 mm		<b>29911</b>
 	<b>KLUDI ADLON two-way diverter</b> set 2 – trim set cross handle consisting of: handle, sleeve, rosette	chrome gold plated 23 carat	<b>518450520</b> <b>518454520</b>
	<b>required accessories:</b> two-way diverter DN 15 set 1 – pre-installation	neutral	<b>2975100</b>
<b>Accessories</b>	<b>KLUDI ADLON angle valve DN 15</b> cross handle without marking flow rate 27 l/min at 3 bar with compression joint with push-on rosette	chrome gold plated 23 carat	<b>518430520</b> <b>518434520</b>
 	<b>KLUDI copper tube</b> 10 x 500 mm with doubled flanging for G 1/2 or G 3/8	chrome gold plated 23 carat	<b>1620305-00</b> <b>1620345-00</b>













## KLUDI ADLON

product	product description		surface	Art.-Nr.
Spare parts	KLUDI ADLON handle with cowling „COLD“		chrome gold plated 23 carat	<b>7530005-00</b> <b>7530045-00</b>
				
	KLUDI ADLON handle with cowling „HOT“		chrome gold plated 23 carat	<b>7530105-00</b> <b>7530145-00</b>
				
	KLUDI ADLON handle with insert „neutral“		chrome gold plated 23 carat	<b>7533605-00</b> <b>7533645-00</b>
				



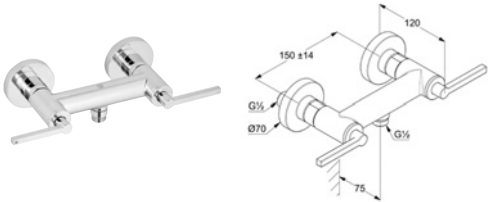


## KLUDI NOVA FONTE

product	product description	surface	Art.-Nr.
<b>Basin</b> 	<b>KLUDI NOVA FONTE Puristic</b> three-hole basin mixer DN 15 wing handles, metal three hole assembling Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm	chrome 	<b>201430515</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Puristic</b> basin mixer DN 15 wing handles, metal single hole mounted Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm	chrome 	<b>201180515</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Puristic</b> wall mounted basin mixer DN 15 for concealed installation projection wall spout 180 mm wing handles, metal Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set	chrome 	<b>201440515</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Puristic</b> wall mounted basin mixer DN 15 for concealed installation projection wall spout 240 mm wing handles, metal Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set	chrome 	<b>201460515</b> <b>NEW</b>



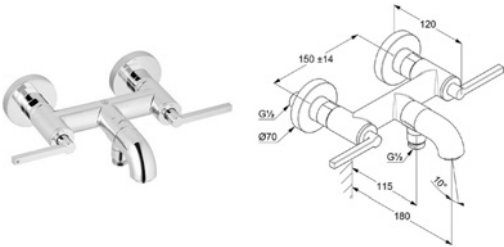


KLUDI NOVA FONTE

product	product description		surface	Art.-Nr.
<b>Bath</b>		<b>KLUDI NOVA FONTE Puristic</b> bath- and shower mixer DN 15 wing handles, metal Soft-Start ceramic headpart 90° wall fastening autom. diverter shower/bathtub protected against back flow flow regulator s-pointer M 24 x 1 flow rate 23 l/min at 3 bar shower outlet G 1/2 s-connections	chrome 	<b>205400515</b> <b>NEW</b>
<b>Shower</b>		<b>KLUDI NOVA FONTE Puristic</b> shower mixer DN 15 wing handles, metal Soft-Start ceramic headpart 90° wall fastening protected against back flow flow rate 21 l/min at 3 bar s-connections	chrome	<b>207100515</b> <b>NEW</b>

32











## KLUDI NOVA FONTE

product	product description	surface	Art.-Nr.
<b>Bath</b> 	<b>KLUDI NOVA FONTE Classic</b> bath- and shower mixer DN 15 cross handles, metal Soft-Start ceramic headpart 90° wall fastening autom. diverter shower/bathtub protected against back flow flow regulator s-pointer M 24 x 1 flow rate 23 l/min at 3 bar shower outlet G 1/2 s-connections	chrome 	<b>205400520</b> <b>NEW</b>
<b>Shower</b> 	<b>KLUDI NOVA FONTE Classic</b> shower mixer DN 15 cross handles, metal Soft-Start ceramic headpart 90° wall fastening protected against back flow flow rate 21 l/min at 3 bar s-connections	chrome	<b>207100520</b> <b>NEW</b>



## KLUDI NOVA FONTE





















product	product description	surface	Art.-Nr.
<b>Basin</b> 	<b>KLUDI NOVA FONTE Déco</b> three-hole basin mixer DN 15 star handles, metal three hole assembling Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm	chrome 	<b>201430539</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Déco</b> basin mixer DN 15 star handles, metal single hole mounted Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar swivelling (150° / 360°) or lockable spout flexible pressure hoses G 3/8 with shank fastening metal pop-up waste G 1 1/4 spout height lower edge 185 mm	chrome 	<b>201180539</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Déco</b> wall mounted basin mixer DN 15 for concealed installation projection wall spout 180 mm star handles, metal Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set	chrome 	<b>201440539</b> <b>NEW</b>
	<b>KLUDI NOVA FONTE Déco</b> wall mounted basin mixer DN 15 for concealed installation projection wall spout 240 mm star handles, metal Aerator M18,5 x 1 PCA laminar Soft-Start ceramic headpart 90° Flow rate 5,6 l / min at 3 bar pre-installation set and trim set	chrome 	<b>201460539</b> <b>NEW</b>

surface	Art.-Nr.
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

35















## KLUDI AMBA

product		product description	surface	Art.-Nr.
Basin		 <p><b>KLUDI AMBA</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome  	<b>530230575</b>
		 <p><b>KLUDI AMBA</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome  	<b>530260575</b>
		 <p><b>KLUDI AMBA</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	chrome  	<b>530290575</b>
		 <p><b>KLUDI AMBA</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm</p>	chrome  	<b>530280575</b>
		 <p><b>KLUDI AMBA</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 4,3 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height 273 mm</p>	chrome  	<b>532980575</b>















## KLUDI AMBA

product		product description	surface	Art.-Nr.
		<b>KLUDI AMBA</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 4,3 l/min at 3 bar caché s-pointer-aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 213 mm	chrome  	<b>532960575</b>
		<b>KLUDI AMBA</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 projection wall spout 226 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer  installation set DN 15 for concealed two hole wall mounted basin mixer	chrome  	<b>532450575</b>  <b>38243</b>  <b>38242</b>
		<b>KLUDI AMBA</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 projection wall spout 186 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer  installation set DN 15 for concealed two hole wall mounted basin mixer	chrome  	<b>532440575</b>  <b>38243</b>  <b>38242</b>









## KLUDI AMBA

product		product description	surface	Art.-Nr.
<b>Bidet</b>		 <p><b>KLUDI AMBA</b> <b>single lever bidet mixer DN 15</b> solid lever single hole mounted flow rate 7,3 l/min at 3 bar ball joint-cascade-aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 100 mm</p>	chrome 	<b>532160575</b>
<b>Bath</b>		 <p><b>KLUDI AMBA</b> <b>single lever bath- and shower mixer DN 15</b> solid lever wall fastening flow class D/B caché s-pointer-Laminar-flow-regulator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow covered eccentric-wall connections</p>	chrome 	<b>534450575</b>
		 <p><b>KLUDI AMBA</b> <b>thermostatic bath- and shower mixer DN 15</b> wall fastening flow class B cascade aerator M 28 x 1 temperature control handle with hot water safety device 38° C with shut-off valve 50 % water consumption regulation autom. diverter shower/bathtub protected against back flow according to DIN EN 1717 temperature insulated body dirt catcher sieves shower outlet G 1/2 s-connections handle metal</p>	chrome  	<b>534010538</b>



## KLUDI AMBA

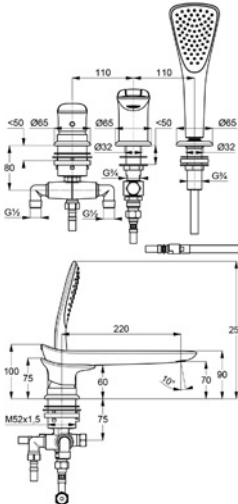product	product description	surface	Art.-Nr.
	 <p><b>KLUDI AMBA</b> <b>single lever bath- and shower mixer DN 15</b> installation for free standing bathtub solid lever ceramic cartridge with hot water limitation flow class B/B caché s-pointer-Laminar-flow-regulator M 24 x 1 autom. diverter shower/bathtub protected against back flow KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm with KLUDI FIZZ handshower 1S 6760005-00</p> <p><b>required accessories:</b> KLUDI FLEXX.BOX concealed unit DN 20</p>	chrome 	<b>535900575</b>
	 <p><b>KLUDI AMBA</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly solid lever three hole tiles deck mounted installation flow class D/B caché s-pointer-Laminar-flow-regulator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow projection 223 mm pull-out hand shower flexible high pressure supply hoses 500 mm</p> <p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p> <p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome 	<b>534470575</b>
		chrome	<b>7881205-00</b>

40

**KLUDI AMBA**

product	product description		surface	Art.-Nr.
		<b>KLUDI AMBA concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow class D/C protected against back flow according to DIN EN 1717 P-IX 28134/IIDB	chrome	<b>536570575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>
		<b>KLUDI AMBA concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B	chrome 	<b>538300575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>
<b>Shower</b> 		<b>KLUDI AMBA single lever shower mixer DN 15</b> solid lever wall fastening flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow covered eccentric-wall connections	chrome	<b>537100575</b>
		<b>KLUDI AMBA concealed single lever shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC	chrome	<b>536550575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>



## KLUDI AMBA





















product	product description	surface	Art.-Nr.
 	<b>KLUDI AMBA</b> <b>concealed single lever shower mixer</b> trim set solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	537180575
 	<b>KLUDI AMBA</b> <b>concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome 	537290575
 	<b>KLUDI AMBA</b> <b>three-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette <b>required accessories:</b> three-way diverter DN 15 set 1 – pre-installation	chrome	538460575
 	<b>KLUDI AMBA</b> <b>two-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette <b>required accessories:</b> two-way diverter DN 15 set 1 – pre-installation	chrome	538470575
 	<b>KLUDI AMBA</b> <b>concealed valve</b> concealed trim-set consisting of: handle, sleeve, rosette adjustable extension <b>required accessories:</b> concealed valve DN 20 connection G 3/4	chrome	538150575

**KLUDI AMBA**

product	product description	surface	Art.-Nr.
<b>Spare parts</b> 	<b>KLUDI AMBA lever</b> for 53023., 53026., 53029., 53028., 53296., 53298., 53216.	chrome	<b>7307605-00</b>
	<b>KLUDI AMBA lever</b> for 53590., 53447.	chrome	<b>7307405-00</b>
	<b>KLUDI AMBA lever</b> for 53445., 53650., 53657., 53710., 53655.	chrome	<b>7307305-00</b>
















## KLUDI E2

product	product description	surface	Art.-Nr.
<b>Basin</b>  	<b>KLUDI E2 single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 80 mm	chrome  	<b>490230575</b>
 	<b>KLUDI E2 single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 120 mm	chrome  	<b>492950575</b>
 	<b>KLUDI E2 single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 120 mm	chrome  	<b>492970575</b>
 	<b>KLUDI E2 single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 155 mm	chrome  	<b>492960575</b>
 	<b>KLUDI E2 single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 260 mm	chrome  	<b>492980575</b>



**KLUDI E2**











product		product description	surface	Art.-Nr.
		<b>KLUDI E2</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 230 mm	chrome  	<b>492450575</b>
		<b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer		<b>38243</b>
		<b>KLUDI E2</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 180 mm	chrome  	<b>492440575</b>
		<b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer		<b>38243</b>
<b>Bidet</b>		<b>KLUDI E2</b> <b>single lever bidet mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge Ø 28 mm pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set	chrome  	<b>492160575</b>
<b>Bath</b>		<b>KLUDI E2</b> <b>single lever bath- and shower mixer DN 15</b> solid lever wall fastening flow class C/B s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without shower set autom. diverter shower/bathtub protected against back flow s-connections shower outlet G 1/2	chrome 	<b>494450575</b>

46

## Bathroom fittings















## KLUDI E2

product	product description		surface	Art.-Nr.
 	<b>KLUDI E2</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow class D/C protected against back flow according to DIN EN 1717 noise level I		chrome	<b>496570575</b>
	<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20			<b>88011</b>
 	<b>KLUDI E2</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C flow class B		chrome 	<b>498300575</b>
	<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20			<b>88011</b>
 	<b>KLUDI E2</b> <b>bath filler DN 20</b> wall fastening projection 175 mm flow class D s-pointer aerator M 24 x 1 separate connector G 3/4 for pre-installation		chrome 	<b>4950305</b>
<b>Shower</b>  	<b>KLUDI E2</b> <b>single lever shower mixer DN 15</b> solid lever wall fastening flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow s-connections without shower set		chrome	<b>497140575</b>







## KLUDI E2

product	product description		surface	Art.-Nr.
 	<b>KLUDI E2 concealed single lever shower mixer</b> concealed valve with functional unit solid lever ceramic cartridge with hot water limitation  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		chrome	<b>496550575</b>  <b>88011</b>
 	<b>KLUDI E2 concealed single lever shower mixer</b> trim set wall fastening solid lever without pre-installation set  <b>required accessories:</b> concealed mixer DN 15 pre-installation set		chrome	<b>497180575</b>  <b>33434</b>
 	<b>KLUDI E2 concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		chrome 	<b>498350575</b>  <b>88011</b>
 	<b>KLUDI E2 concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve hot water safety device 38 °C flow rate 40 l/min at 3 bar  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		chrome 	<b>497290575</b>  <b>88011</b>
 	<b>KLUDI E2 three-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette  <b>required accessories:</b> three-way diverter DN 15 set 1 – pre-installation		chrome	<b>498460575</b>  <b>29757</b>



## KLUDI E2

product	product description		surface	Art.-Nr.
 	<b>KLUDI E2 two-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette		chrome	<b>498470575</b>
	<b>required accessories:</b> two-way diverter DN 15 set 1 – pre-installation			<b>29747</b>
 	<b>KLUDI E2 concealed valve</b> concealed trim-set consisting of: handle, sleeve, rosette adjustable extension		chrome	<b>498150575</b>
	<b>required accessories:</b> concealed valve DN 20 connection G 3/4			<b>53811</b>



## KLUDI BALANCE

product	product description	surface	art. no.
Basin	<b>KLUDI BALANCE</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 8 l/min at 3 bar caché s-pointer-Laminar-flow-regulator M 24 x 1 water flow regulator 8 l/min ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 100 mm	chrome white/chrome matt black/ chrome  	<b>520230575</b> <b>520239175</b> <b>520238775</b> <b>NEW</b>
 	<b>KLUDI BALANCE</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 8 l/min at 3 bar caché s-pointer-Laminar-flow-regulator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 noise level I water flow regulator 8 l/min spout height lower edge 100 mm	chrome white/chrome matt black/ chrome  	<b>520260575</b> <b>520269175</b> <b>520268775</b> <b>NEW</b>
 	<b>KLUDI BALANCE E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 7,6 l/min at 3 bar PCA cascade aerator M 24 x 1 with anti-theft device magnet-cartridge unit with presetable temperature control handle optical object-detection electronic unit with control device electric power supply via 230 V main adapter backflow preventer without pop-up waste rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves noise level I protected against vandalism spout height lower edge 105 mm	chrome white/chrome   	<b>5220005</b> <b>5220091</b>




















## KLUDI BALANCE

product	product description	surface	art. no.
 	<b>KLUDI BALANCE E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 7,6 l/min at 3 bar PCA cascade aerator M 24 x 1 with anti-theft device magnet-cartridge unit with presetable temperature control handle optical object-detection electronic unit with battery control device 6 V lithium battery CR-P2, anti theft backflow preventer without pop-up waste rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves noise level I protected against vandalism spout height lower edge 105 mm	chrome white/chrome   	<b>5210005</b> <b>5210091</b>
 	<b>KLUDI BALANCE E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 5 l/min at 3 bar thief-proof aerator M 24 x 1 magnet-cartridge unit with presetable temperature control handle optical object-detection electronic unit with control device electric power supply via 230 V main adapter without pop-up waste rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves noise level I protected against vandalism for use with displacement heaters spout height lower edge 105 mm	chrome    	<b>5220205</b>





## KLUDI BALANCE

product	product description	surface	art. no.
 	<b>KLUDI BALANCE E</b> <b>electronic controlled pillar tap DN 15</b> single hole mounted flow rate 7,6 l/min at 3 bar thief-proof Cascade-aerator M 24 x 1 magnet-cartridge unit optical object-detection electronic unit with battery control device 6 V lithium battery CR-P2, anti theft backflow preventer without pop-up waste rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves noise level I protected against vandalism spout height lower edge 105 mm	chrome   	<b>5210505</b>
 	<b>KLUDI BALANCE</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 8 l/min at 3 bar caché s-pointer-Laminar-flow-regulator M 24 x 1 water flow regulator 8 l/min ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 272 mm	chrome white/chrome matt black/ chrome  	<b>522980575</b> <b>522989175</b> <b>522988775</b> <b>NEW</b>
 	<b>KLUDI BALANCE</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 8 l/min at 3 bar caché s-pointer-Laminar-flow-regulator M 24 x 1 water flow regulator 8 l/min ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 212 mm	chrome white/chrome matt black/ chrome  	<b>522960575</b> <b>522969175</b> <b>522968775</b> <b>NEW</b>
 	<b>KLUDI BALANCE</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 235 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome matt black/ chrome  	<b>522470575</b> <b>522478775</b> <b>NEW</b>  <b>38243</b>


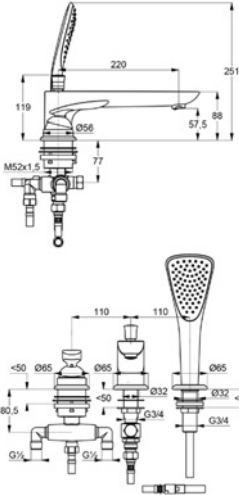







## KLUDI BALANCE

product	product description	surface	art. no.
 	<b>KLUDI BALANCE</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 185 mm	chrome white/chrome matt black/ chrome	<b>522460575</b> <b>522469175</b> <b>522468775</b> <b>NEW</b>
	<b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	 	<b>38243</b>
<b>Bidet</b>  	<b>KLUDI BALANCE</b> <b>single lever bidet mixer DN 15</b> single hole mounted solid lever flow class Z without ball joint Eco s-pointer aerator M 24 x 1Z ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 100 mm	chrome white/chrome matt black/ chrome	<b>522160575</b> <b>522169175</b> <b>522168775</b>
		 	
<b>Bath</b>  	<b>KLUDI BALANCE</b> <b>single lever bath- and shower mixer DN 15</b> solid lever wall fastening flow class D/B s-pointer aerator M 24 x 1D ceramic cartridge with hot water limitation autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections noise level I	chrome white/chrome matt black/ chrome	<b>524450575</b> <b>524459175</b> <b>524458775</b> <b>NEW</b>
			
 	<b>KLUDI BALANCE</b> <b>single lever bath- and shower mixer DN 15</b> installation for free standing bathtub solid lever ceramic cartridge with hot water limitation caché s-pointer-Laminar-flow-regulator M 24 x 1 flow class B/B autom. diverter shower/bathtub protected against back flow KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1250 mm with KLUDI FIZZ handshower 1S	chrome white/chrome matt black/ chrome	<b>525900575</b> <b>525909175</b> <b>525908775</b> <b>NEW</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed unit DN 20		<b>88088</b>









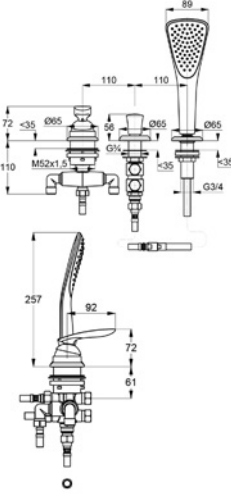



## KLUDI BALANCE

product	product description	surface	art. no.
	 <p><b>KLUDI BALANCE</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly solid lever three hole tiles deck mounted installation flow class D/B flexible high pressure supply hoses G 1/2 x G 1/2 x 600 mm s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow retractable hand shower shower hose 1500 mm high pressure supply hose 500 mm projection 220 mm noise level I P-IX 7505/IDB</p> <p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p> <p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome white/chrome matt black/ chrome 	<b>524470575</b> <b>524479175</b> <b>524478775</b> <b>NEW</b>
		chrome	<b>7614946-00</b> <b>7881205-00</b>
	 <p><b>KLUDI BALANCE</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly solid lever three hole tiles deck mounted installation flexible high pressure supply hoses G 1/2 x G 1/2 x 600 mm ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm high pressure supply hose 500 mm without bath filler</p> <p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p> <p>KLUDI ROTEXA MULTI bath filling, waste and overflow set G 1 1/2</p> <p>KLUDI ROTEXA MULTI filling, waste and overflow</p> <p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome	<b>524480575</b> <b>7614946-00</b> <b>2131500-00</b> <b>7182605-00</b> <b>7880205-00</b>
	 <p><b>KLUDI BALANCE</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome white/chrome matt black/ chrome	<b>526500575</b> <b>526509175</b> <b>526508775</b> <b>NEW</b> <b>88011</b>















## KLUDI BALANCE

product	product description	surface	art. no.
 	<b>KLUDI BALANCE</b> <b>concealed single lever bath and shower mixer</b> concealed trim-set solid lever autom. diverter shower/bathtub  <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	<b>525150575</b>  <b>33434</b>
 	<b>KLUDI BALANCE</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit wall fastening solid lever ceramic cartridge with hot water limitation flow class C/B autom. diverter shower/bathtub protected against back flow for bath- and shower tubs  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome	<b>526570575</b>  <b>88011</b>
 	<b>KLUDI BALANCE</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B P-IX 18444/IIIC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome white/chrome matt black/ chrome 	<b>528300575</b> <b>528309175</b> <b>528308775</b> <b>NEW</b>
 	<b>KLUDI BALANCE</b> <b>bath filler DN 20</b> wall fastening projection 170 mm flow class C s-pointer aerator M 24 x 1C separate connector G 3/4 for pre-installation	chrome white/chrome matt black/ chrome 	<b>5250305</b> <b>5250391</b> <b>5250387</b> <b>NEW</b>



## KLUDI BALANCE

product	product description	surface	art. no.
<b>Shower</b> 	 <b>KLUDI BALANCE single lever shower mixer DN 15</b> solid lever wall fastening flow class B ceramic cartridge with hot water limitation shower outlet G 1/2 protected against back flow s-connections noise level I	chrome white/chrome matt black/ chrome	<b>527100575</b> <b>527109175</b> <b>527108775</b> <b>NEW</b>
	 <b>KLUDI BALANCE thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C ceramic shut-off valve 180° 50 % water consumption regulation protected against back flow pre-installed dirt cleaner sieve shower outlet G 1/2 s-connections handle metal	chrome 	<b>352500575</b>
	 <b>KLUDI BALANCE concealed single lever shower mixer</b> concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome white/chrome matt black/ chrome	<b>526550575</b> <b>526559175</b> <b>526558775</b> <b>NEW</b>  <b>88011</b>
	 <b>KLUDI BALANCE concealed single lever shower mixer</b> concealed trim-set solid lever  <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	<b>527180575</b>  <b>33434</b>
	 <b>KLUDI BALANCE concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve cylindrical handle, metal hot water safety device 38 °C P-IX 18444/IIIC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome matt black/ chrome 	<b>528350575</b> <b>528358775</b> <b>NEW</b>  <b>88011</b>























## KLUDI BALANCE

product	product description		surface	art. no.
		<b>KLUDI BALANCE concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome white/chrome matt black/chrome  	<b>527290575</b> <b>527299175</b> <b>527298775</b>  <b>NEW</b>   <b>88011</b>
		<b>KLUDI BALANCE three-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette cylindrical handle  <b>required accessories:</b> three-way diverter DN 15 set 1 – pre-installation	chrome white/chrome matt black/ chrome	<b>528460575</b> <b>528469175</b> <b>528468775</b>  <b>NEW</b>   <b>29757</b>
		<b>KLUDI BALANCE two-way diverter</b> trim set set 2 – trim set consisting of: handle, sleeve, rosette cylindrical handle  <b>required accessories:</b> two-way diverter DN 15 set 1 – pre-installation	chrome white/chrome matt black/ chrome	<b>528470575</b> <b>528479175</b> <b>528478775</b>  <b>NEW</b>   <b>29747</b>
		<b>KLUDI BALANCE concealed valve</b> concealed trim-set consisting of: handle, sleeve, rosette adjustable extension  <b>required accessories:</b> concealed valve DN 20 connection G 3/4	chrome white/chrome matt black/ chrome	<b>528150575</b> <b>528159175</b> <b>528158775</b>  <b>NEW</b>   <b>53811</b>
<b>Spare parts</b>	<b>KLUDI BALANCE lever for single lever mixer</b> 52023, 52026, 52216, 52296, 52298, 52445, 52710		chrome white matt black	<b>7498905-00</b> <b>7498943-00</b> <b>7498939-00</b>
				



















## KLUDI AMEO

product	product description		surface	art. no.
<b>Basin</b>			chrome	<b>410290575</b>
		<b>KLUDI AMEO</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm	 	
		<b>KLUDI AMEO</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm	 	<b>410280575</b>
		<b>KLUDI AMEO</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 for use with displacement heaters spout height lower edge 75 mm	 	<b>412760575</b>
		<b>KLUDI AMEO</b> <b>single lever basin mixer XL DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 95 mm	 	<b>410230575</b>
		<b>KLUDI AMEO</b> <b>single lever basin mixer XL DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 95 mm	 	<b>410260575</b>















## KLUDI AMEO

product		product description	surface	art. no.
		<b>KLUDI AMEO</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 195 mm	chrome  	<b>410240575</b>
		<b>KLUDI AMEO</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 195 mm	chrome  	<b>410250575</b>
		<b>KLUDI AMEO</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 270 mm	chrome  	<b>412980575</b>
		<b>KLUDI AMEO</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 205 mm	chrome  	<b>412960575</b>



















## KLUDI AMEO

product	product description	surface	art. no.
 	<b>KLUDI AMEO</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 235 mm	chrome	<b>412450575</b>
	<b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	 	<b>38243</b>
	installation set DN 15 for concealed two hole wall mounted basin mixer		<b>38242</b>
 	<b>KLUDI AMEO</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 projection wall spout 185 mm	chrome	<b>412440575</b>
	<b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	 	<b>38243</b>
	installation set DN 15 for concealed two hole wall mounted basin mixer		<b>38242</b>
 	<b>KLUDI AMEO</b> <b>three-hole basin mixer DN 15</b> solid lever three hole assembling flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 pop-up waste G 1 1/4 spout height lower edge 135 mm	chrome	<b>413930575</b>
		 	


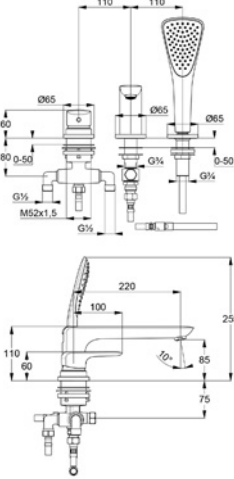





## KLUDI AMEO

product	product description	surface	art. no.
 	<b>KLUDI AMEO</b> <b>three-hole basin mixer DN 15</b> cylindric handles three hole assembling flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 pop-up waste G 1 1/4 spout height lower edge 135 mm	chrome  	<b>413930530</b>
<b>Bidet</b>  	<b>KLUDI AMEO</b> <b>single lever bidet mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 85 mm	chrome  	<b>412160575</b>
<b>Bath</b>  	<b>KLUDI AMEO</b> <b>single lever bath- and shower mixer DN 15</b> solid lever wall fastening ceramic cartridge with hot water limitation flow regulator s-pointer M 24 x 1 flow rate bath 20 l/min at 3 bar, flow rate handshower 24 l/min at 3 bar autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections	chrome 	<b>414450575</b>
 	<b>KLUDI AMEO</b> <b>single lever bath- and shower mixer DN 15</b> solid lever vertically and horizontally adjustable wall fastening flow regulator s-pointer M 24 x 1 flow rate bath 20 l/min at 3 bar, flow rate handshower 24 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow autom. diverter shower/bathtub shower outlet G 1/2 s-connections	chrome 	<b>416710575</b>


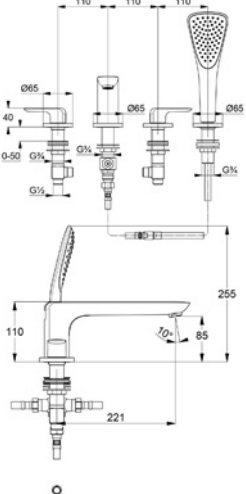





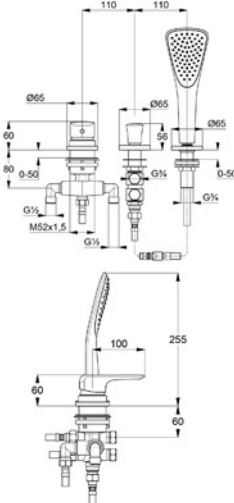


## KLUDI AMEO

product	product description	surface	art. no.
	 <p><b>KLUDI AMEO</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly solid lever three hole tiles deck mounted installation flow regulator s-pointer M 24 x 1 flow class D/B ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm high pressure supply hose 500 mm projection 220 mm</p>	chrome 	<b>414470575</b>
	<p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p>		<b>7614946-00</b>
	<p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome	<b>7881205-00</b>
	 <p><b>KLUDI AMEO</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly solid lever three hole tiles deck mounted installation flow class D/B ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm high pressure supply hose 500 mm flexible high pressure supply hoses G 1/2 x G 1/2 x 600 mm without bath filler</p>	chrome	<b>414480575</b>
	<p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p>		<b>7614946-00</b>
	<p>KLUDI ROTEXA MULTI bath filling, waste and overflow set G 1 1/2</p>	neutral	<b>2131500-00</b>
	<p>KLUDI ROTEXA MULTI filling, waste and overflow</p>	chrome	<b>7182605-00</b>
	<p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome	<b>7880205-00</b>









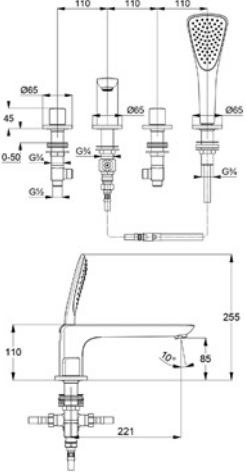


## KLUDI AMEO

product	product description	surface	art. no.
 	<b>KLUDI AMEO bath- and shower mixer DN 15</b> four hole tiles deck mounted installation stand assembly flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm solid lever ceramic headpart 90° flow regulator s-pointer M 24 x 1 flow rate bath 27 l/min at 3 bar, flow rate handshower 13 l/min at 3 bar autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm high pressure supply hose 500 mm projection 220 mm	chrome 	<b>414240575</b>
	<b>required accessories:</b> mounting plate pre-installation set for four hole mixer		<b>7614846-00</b>
	KLUDI ROTEXA bath rim assembly kit	chrome	<b>7878205-00</b>
 	<b>KLUDI AMEO bath- and shower mixer DN 15</b> four hole tiles deck mounted installation stand assembly flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm cylindric handles ceramic headpart 90° flow regulator s-pointer M 24 x 1 flow rate bath 27 l/min at 3 bar, flow rate handshower 13 l/min at 3 bar autom. diverter shower/bathtub protected against back flow pull-out hand shower shower hose 1500 mm high pressure supply hose 500 mm projection 220 mm	chrome 	<b>414240530</b>
	<b>required accessories:</b> mounting plate pre-installation set for four hole mixer		<b>7614846-00</b>
	KLUDI ROTEXA bath rim assembly kit	chrome	<b>7878205-00</b>
 	<b>KLUDI AMEO concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C autom. diverter shower/bathtub	chrome	<b>416500575</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>









## KLUDI AMEO

product	product description	surface	art. no.
 	<b>KLUDI AMEO</b> <b>concealed single lever bath and shower mixer</b> concealed trim-set solid lever autom. diverter shower/bathtub  <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	<b>415150575</b>  <b>33434</b>
 	<b>KLUDI AMEO</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C autom. diverter shower/bathtub protected against back flow according to DIN EN 1717  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome	<b>416570575</b>  <b>88011</b>
 	<b>KLUDI AMEO</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome 	<b>418300575</b>  <b>88011</b>
 	<b>KLUDI AMEO</b> <b>bath filler DN 20</b> wall fastening projection 170 mm flow class C s-pointer aerator M 24 x 1C separate connector G 3/4 for pre-installation	chrome	<b>4150505</b>























66

**KLUDI BINGO STAR**

product	product description	surface	art. no.
<b>Basin</b> 	 <p><b>KLUDI BINGO STAR single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 7,5 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set P-IX 18635/IA</p>	chrome 	<b>420230578</b>
	 <p><b>KLUDI BINGO STAR single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 7,5 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout with stop device 30°/30° pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set</p>	chrome 	<b>420300578</b>




















## KLUDI BOZZ

product		product description	surface	art. no.
Basin				
		<b>KLUDI BOZZ</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome  	<b>382700576</b> <b>NEW</b>
		<b>KLUDI BOZZ</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set PUSH-OPEN waste G 1 1/4 spout height lower edge 75 mm	chrome matt black  	<b>382660576</b> <b>382663976</b> <b>NEW</b>
		<b>KLUDI BOZZ</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 75 mm	chrome matt black  	<b>382720576</b> <b>382723976</b> <b>NEW</b>
		<b>KLUDI BOZZ</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 for use with displacement heaters spout height lower edge 75 mm	chrome   	<b>382770576</b> <b>NEW</b>
		<b>KLUDI BOZZ</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation centre position cold water flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 75 mm	chrome   	<b>382630576</b> <b>NEW</b>













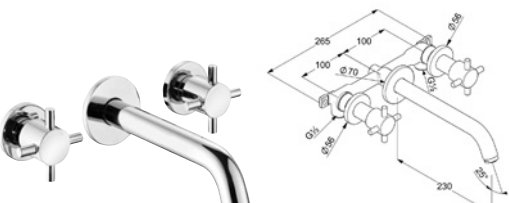


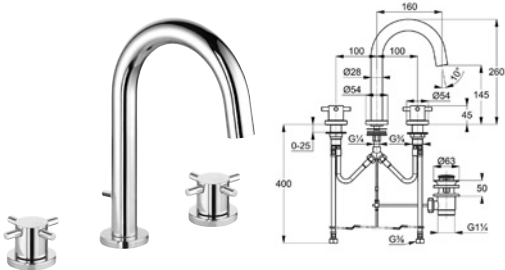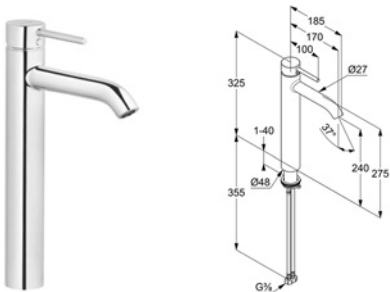

## KLUDI BOZZ

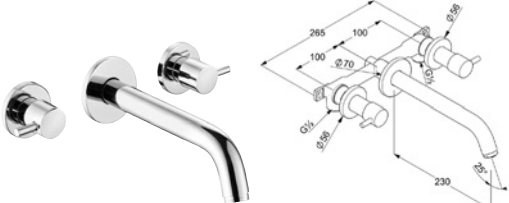product	product description	surface	art. no.
	 <p><b>KLUDI BOZZ</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set metal pop-up waste G 1 1/4 spout height lower edge 100 mm</p>	chrome  	<b>382800576</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set PUSH-OPEN waste G 1 1/4 spout height lower edge 100 mm</p>	chrome matt black  	<b>382880576</b> <b>382883976</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation flexible hoses G 3/8 rapid installation set without pop-up waste spout height lower edge 100 mm</p>	chrome matt black  	<b>382820576</b> <b>382883976</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 7 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set pop-up waste G 1 1/4 flexible hoses G 3/8 noise level I spout height lower edge 235 mm</p>	chrome 	<b>382940576</b>
	 <p><b>KLUDI BOZZ</b> <b>basin mixer DN 15</b> solid lever three hole assembling pop-up waste G 1 1/4 flow rate 12 l/min at 3 bar caché-aerator M 21,5 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 noise level I</p>	chrome	<b>383930576</b>



















## KLUDI BOZZ

product	product description	surface	art. no.
	<b>KLUDI BOZZ basin mixer DN 15</b> cross handles three hole assembling pop-up waste G 1 1/4 flow rate 12 l/min at 3 bar caché-aerator M 21,5 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 noise level I	chrome	<b>383930520</b>
	<b>KLUDI BOZZ single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min at 3 bar caché s-pointer-aerator M 18,5 x 1 ceramic cartridge with hot water limitation Aflexible hoses G 3/8 rapid installation set spout height lower edge 240 mm	chrome  	<b>382860576</b> <b>NEW</b>
	<b>KLUDI BOZZ wall mounted basin mixer DN 15</b> for concealed installation solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic headpart 90° pre-installation set and trim set projection wall spout 230 mm	chrome  	<b>381460576</b>
	<b>KLUDI BOZZ wall mounted basin mixer DN 15</b> for concealed installation solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic headpart 90° pre-installation set and trim set projection wall spout 180 mm	chrome  	<b>381450576</b>
	<b>KLUDI BOZZ wall mounted basin mixer DN 15</b> for concealed installation cross handles flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic headpart 90° pre-installation set and trim set projection wall spout 230 mm	chrome  	<b>381460520</b>



## KLUDI BOZZ

product	product description	surface	art. no.
 	<b>KLUDI BOZZ</b> <b>wall mounted basin mixer DN 15</b> for concealed installation cross handles flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic headpart 90° pre-installation set and trim set projection wall spout 180 mm	chrome  	<b>381450520</b>
 	<b>KLUDI BOZZ</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 rosette diameter 70 mm projection wall spout 230 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome  	<b>382450576</b> <b>NEW</b>  <b>38243</b>
 	<b>KLUDI BOZZ</b> <b>concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 5 l/min at 3 bar caché s-pointer-aerator M 24 x 1 rosette diameter 70 mm projection wall spout 180 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome  	<b>382440576</b> <b>NEW</b>  <b>38243</b>
 	<b>KLUDI BOZZ</b> <b>wall mounted pillar valve DN 15</b> wall fastening actuation by stick special headpart with spindle outlet aerator M 21,5 x 1 flow rate 4,3 l/min at 3 bar with push-on rosette connection G 1/2 projection 185 mm	chrome	<b>380180530</b>
 	<b>KLUDI BOZZ</b> <b>wall mounted pillar valve DN 15</b> wall fastening actuation by stick special headpart with spindle outlet aerator M 21,5 x 1 flow rate 4,3 l/min at 3 bar with push-on rosette connection G 1/2 projection 110 mm	chrome	<b>380170530</b>















## KLUDI BOZZ

product	product description	surface	art. no.
 	<b>KLUDI BOZZ</b> <b>pillar tap with head part control unit DN 15</b> single hole mounted actuation by stick special headpart with spindle outlet aerator M 21,5 x 1 flow rate 4,3 l/min at 3 bar shank fastening G 1/2	chrome	<b>380160530</b>
 	<b>KLUDI</b> <b>pillar valve DN 15</b> cylindrical handle single hole mounted flow rate 8 l/min at 3 bar caché eco s-pointer-aerator M 18,5 x 1 ceramic headpart 90° without pop-up waste	chrome  	<b>381160530</b>
<b>Bidet</b>  	<b>KLUDI BOZZ</b> <b>single lever bidet mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar ball joint-aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set	chrome matt black 	<b>385330576</b> <b>385333976</b> <div>NEW</div>
<b>Bath</b>  	<b>KLUDI BOZZ</b> <b>single lever bath- and shower mixer DN 15</b> solid lever wall fastening aerator M 24 x 1 flow rate 22 l/min at 3 bar ceramic cartridge with hot water limitation autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4	chrome matt black	<b>386910576</b> <b>386913976</b> <div>NEW</div>

## Bathroom fittings




















## KLUDI BOZZ

product	product description	surface	art. no.
	 <p><b>KLUDI BOZZ</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow rate 23 l/min at 3 bar protected against back flow according to DIN EN 1717</p> <p><b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20</p>	chrome matt black	<b>386570576</b> <b>386573976</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>bath filler DN 20</b> wall fastening projection 160 mm s-pointer aerator M 24 x 1 with push-on rosette</p>	chrome matt black 	<b>3850505</b> <b>3850539</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>single lever shower mixer DN 15</b> solid lever wall fastening flow rate 28 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	chrome matt black	<b>388310576</b> <b>388313976</b> <b>NEW</b>
	 <p><b>KLUDI BOZZ</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve s-connections protected against back flow dirt catcher sieves shower outlet G 1/2 P-IX 8049/IB</p>	chrome 	<b>352030538</b>
	 <p><b>KLUDI BOZZ</b> <b>concealed single lever shower mixer</b> concealed valve with functional unit solid lever ceramic cartridge with hot water limitation</p> <p><b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20</p>	chrome matt black	<b>386550576</b> <b>386553976</b> <b>NEW</b>  <b>88011</b>


















## KLUDI ZENTA SL

product	product description		surface	Art.-Nr.	
Basin			<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome 	<b>482600565</b>
		<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome 	<b>482620565</b>	
		<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar pop-up waste G 1 1/4 flexible hoses G 3/8 for use with displacement heaters spout height lower edge 75 mm	chrome  	<b>482770565</b>	
		<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome 	<b>482660565</b>	
		<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 75 DN 15</b> solid lever single hole mounted flow rate 7 l/min at 3 bar flow regulator M 24 x 1 ceramic cartridge with hot water limitation centre position cold water pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 75 mm	chrome  	<b>482630565</b>	


















## KLUDI ZENTA SL

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>482900565</b>
 	<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>482920565</b>
 	<b>KLUDI ZENTA SL</b> <b>single lever basin mixer 100 DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar PUSH-OPEN waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>482980565</b>
 	<b>KLUDI ZENTA SL</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar swivelling spout (360°) pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm	chrome 	<b>480270565</b>
 	<b>KLUDI ZENTA SL</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar swivelling spout (360°) without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm	chrome 	<b>480280565</b>




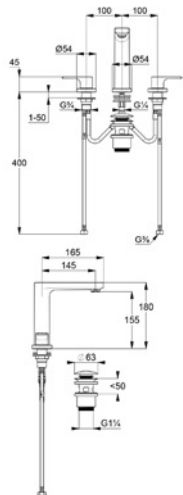









## KLUDI ZENTA SL

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA SL single lever washbowl mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 240 mm	chrome 	<b>482560565</b>
 	<b>KLUDI ZENTA SL concealed two hole wall mounted basin mixer</b> trim set One-piece rosette solid lever flow regulator M 24 x 1 flow rate 7 l/min at 3 bar projection wall spout 180 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome 	<b>482470565</b>  <b>38242</b>
 	<b>KLUDI ZENTA SL concealed two hole wall mounted basin mixer</b> trim set One-piece rosette solid lever flow regulator M 24 x 1 flow rate 7 l/min at 3 bar projection wall spout 230 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome 	<b>482480565</b> <b>NEW</b>  <b>38242</b>
 	<b>KLUDI ZENTA SL concealed two hole wall mounted basin mixer</b> trim set Two-part rosette solid lever flow regulator M 24 x 1 flow rate 7 l/min at 3 bar projection wall spout 180 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome 	<b>482440565</b> <b>NEW</b>  <b>38242</b>
 	<b>KLUDI ZENTA SL concealed two hole wall mounted basin mixer</b> trim set Two-part rosette solid lever flow regulator M 24 x 1 flow rate 7 l/min at 3 bar projection wall spout 230 mm  <b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer	chrome 	<b>482450565</b> <b>NEW</b>  <b>38242</b>




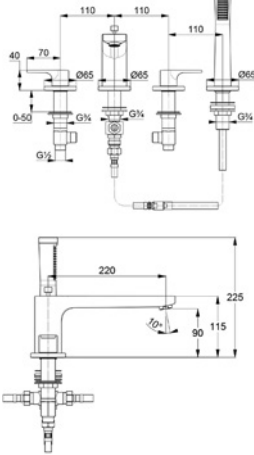






## KLUDI ZENTA SL

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA SL basin mixer DN 15</b> solid lever three hole assembling flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 1/2 spout height lower edge 155 mm	chrome  	<b>483930565</b> <b>NEW</b>
<b>Bidet</b>  	<b>KLUDI ZENTA SL single lever bidet mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar s-pointer eco-aerator M 24 x 1 ceramic cartridge with hot water limitation metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm	chrome 	<b>485300565</b> <b>NEW</b>
<b>Bath</b>  	<b>KLUDI ZENTA SL single lever bath- and shower mixer DN 15</b> solid lever wall fastening flow regulator M 24 x 1 flow rate 21 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow autom. diverter shower/bathtub s-connections G 1/2 x G 3/4	chrome	<b>486700565</b>

79







## KLUDI ZENTA SL

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA SL bath- and shower mixer DN 15</b> four hole tiles deck mounted installation stand assembly solid lever flow rate 27 l/min at 3 bar s-pointer aerator M 24 x 1 ceramic headpart 90° automatic diverter: shower/spray retractable hand shower protected against back flow flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm projection 220 mm	chrome	<b>484240565</b>
	<b>required accessories:</b> mounting plate pre-installation set for four hole mixer		<b>7614846-00</b>
	KLUDI ROTEXA bath rim assembly kit	chrome	<b>7878205-00</b>
 	<b>KLUDI ZENTA SL concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow rate 31 l/min at 3 bar	chrome	<b>486500565</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
 	<b>KLUDI ZENTA SL concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow rate 21 l/min at 3 bar protected against back flow according to DIN EN 1717	chrome	<b>486570565</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
 	<b>KLUDI ZENTA SL bath filler DN 15</b> projection 170 mm wall fastening flow regulator M 24 x 1 flow rate 28 l/min at 3 bar fixed spout connection G 1/2 with wall flange (escutcheon)	chrome	<b>4860005</b>
























## KLUDI ZENTA SL

product	product description	surface	Art.-Nr.
<b>Shower</b> 	 <p><b>KLUDI ZENTA SL single lever shower mixer DN 15</b> solid lever wall fastening flow rate 28 l/min at 3 bar ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4</p>	chrome	<b>488700565</b>
	 <p><b>KLUDI ZENTA SL concealed single lever shower mixer</b> concealed valve with functional unit solid lever ceramic cartridge with hot water limitation</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome	<b>486550565</b>  <b>88011</b>
















## KLUDI ZENTA

product		product description	surface	Art.-Nr.
Waschtisch				
		<b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 65 mm	chrome black/chrome white/chrome  	<b>382500575</b> <b>382508675</b> <b>382509175</b>
		<b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation centre position cold water pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 65 mm	chrome   	<b>382530575</b>
		<b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 65 mm	chrome black/chrome white/chrome  	<b>382510575</b> <b>382518675</b> <b>382519175</b>
		<b>KLUDI ZENTA</b> <b>single lever basin mixer XL DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 75 mm	chrome black/chrome white/chrome  	<b>382600575</b> <b>382608675</b> <b>382609175</b>
		<b>KLUDI ZENTA XL</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 P-IX 18634/1A spout height lower edge 75 mm	chrome  	<b>382620575</b>













## KLUDI ZENTA

product		product description	surface	Art.-Nr.
		<b>KLUDI ZENTA</b> <b>single lever basin mixer XXL DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 120 mm	chrome  	<b>382640575</b>
		<b>KLUDI ZENTA</b> <b>single lever basin mixer XXL DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 120 mm	chrome  	<b>382650575</b>
		<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 6 l/min at 3 bar PCA cascade aerator M 24 x 1 magnet-cartridge unit with mixing shaft optical object-detection electronic unit electric power supply via 230 V main adapter backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3820205</b>





















## KLUDI ZENTA

product		product description	surface	Art.-Nr.
		<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 4,8 l/min PCA cascade aerator M 24 x 1 magnet-cartridge unit with mixing shaft optical object-detection electronic unit 9V alkaline battery backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3810205</b>
		<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 4,8 l/min PCA cascade aerator M 24 x 1 magnet-cartridge unit with temperature control handle optical object-detection electronic unit powered by 230 V mains supply backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3820005</b>
























## KLUDI ZENTA

product	product description		surface	Art.-Nr.
		<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> single hole mounted flow rate 4,8 l/min PCA cascade aerator M 24 x 1 magnet-cartridge unit with temperature control handle optical object-detection electronic unit 9V alkaline battery backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3810005</b>
		<b>KLUDI ZENTA E</b> <b>electronic controlled pillar tap DN 15</b> single hole mounted flow rate 4,8 l/min PCA cascade aerator M 24 x 1 magnet-cartridge unit optical object-detection electronic unit electric power supply via 230 V main adapter backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3820505</b>
		<b>KLUDI ZENTA E</b> <b>electronic controlled pillar tap DN 15</b> single hole mounted flow rate 4,8 l/min PCA cascade aerator M 24 x 1 magnet-cartridge unit optical object-detection electronic unit 9V alkaline battery backflow preventer rapid installation set flexible high pressure supply tubes G 3/8 with dirt catcher sieves spout height lower edge 75 mm	chrome   	<b>3810505</b>
		<b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 7 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set pop-up waste G 1 1/4 flexible hoses G 3/8 noise level I spout height lower edge 235 mm	chrome 	<b>382940575</b>


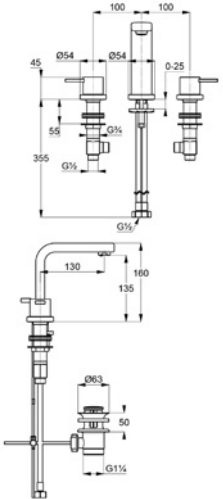












## KLUDI ZENTA

product	product description	surface	Art.-Nr.
	 <p><b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 220 mm</p>	chrome  	<b>420250575</b>
	 <p><b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set flexible hoses G 3/8 spout height lower edge 220 mm</p>	chrome  	<b>420260575</b>
	 <p><b>KLUDI ZENTA</b> <b>single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 7 l/min at 3 bar PCA caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 P-IX 18635/1A spout height lower edge 190 mm</p>	chrome 	<b>382550575</b>
	 <p><b>KLUDI ZENTA</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 260 mm</p>	chrome  	<b>382570575</b>
	 <p><b>KLUDI ZENTA</b> <b>single lever washbowl mixer DN 15</b> solid lever single hole mounted flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation without pop-up waste rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 225 mm</p>	chrome  	<b>382560575</b>











## KLUDI ZENTA

product	product description	surface	Art.-Nr.
	 <p><b>KLUDI ZENTA basin mixer DN 15</b> solid lever three hole assembling flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 135 mm</p>	chrome  	<b>383930575</b>
	 <p><b>KLUDI ZENTA concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 rosette diameter 70 mm projection wall spout 230 mm</p> <p><b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome  	<b>382450575</b>  <b>38243</b>
	 <p><b>KLUDI ZENTA concealed two hole wall mounted basin mixer</b> trim set solid lever flow rate 6 l/min at 3 bar PCA s-pointer aerator M 24 x 1 rosette diameter 70 mm projection wall spout 180 mm</p> <p><b>required accessories:</b> installation set DN 15 for concealed two hole wall mounted basin mixer</p>	chrome  	<b>382440575</b>  <b>38243</b>











## KLUDI ZENTA

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 240 mm	chrome  	<b>3840005</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set		<b>38001</b>
	concealed electronic body DN 15 pre-installation set		<b>38002</b>
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 190 mm	chrome  	<b>3850005</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set		<b>38001</b>
	concealed electronic body DN 15 pre-installation set		<b>38002</b>











## KLUDI ZENTA

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 240 mm	chrome  	<b>3840205</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set for cold or premixed water connection		<b>38003</b>
	concealed electronic body DN 15 pre-installation set for cold or premixed water connection		<b>38004</b>
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set soft-edge escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 190 mm	chrome  	<b>3850205</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set for cold or premixed water connection		<b>38003</b>
	concealed electronic body DN 15 pre-installation set for cold or premixed water connection		<b>38004</b>















## KLUDI ZENTA

product	product description	surface	Art.-Nr.
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 240 mm	chrome  	<b>3840105</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set		<b>38001</b>
	concealed electronic body DN 15 pre-installation set		<b>38002</b>
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening temperature control handle flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 190 mm	chrome  	<b>3850105</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set		<b>38001</b>
	concealed electronic body DN 15 pre-installation set		<b>38002</b>



## KLUDI ZENTA


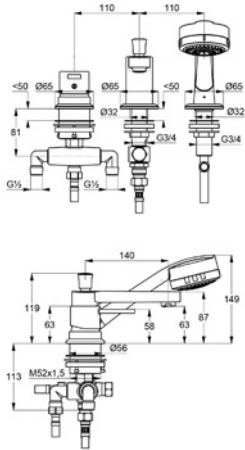






product	product description		surface	Art.-Nr.
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 240 mm		chrome  	<b>3840305</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set for cold or premixed water connection			<b>38003</b>
	concealed electronic body DN 15 pre-installation set for cold or premixed water connection			<b>38004</b>
 	<b>KLUDI ZENTA E</b> <b>electronic controlled basin mixer DN 15</b> trim set round escutcheon powered by 230 V mains supply or 6 V lithium battery CR-P2 wall fastening flow regulator M 24 x 1 flow rate 5 l/min at 3 bar optical object-detection projection 190 mm		chrome  	<b>3850305</b>
	<b>required accessories:</b> concealed electronic body DN 15 pre-installation set for cold or premixed water connection			<b>38003</b>
	concealed electronic body DN 15 pre-installation set for cold or premixed water connection			<b>38004</b>
 	<b>KLUDI</b> <b>pillar valve DN 15</b> cylindrical handle single hole mounted flow rate 8 l/min at 3 bar caché eco s-pointer-aerator M 18,5 x 1 ceramic headpart 90° without pop-up waste		chrome  	<b>381160530</b>

92



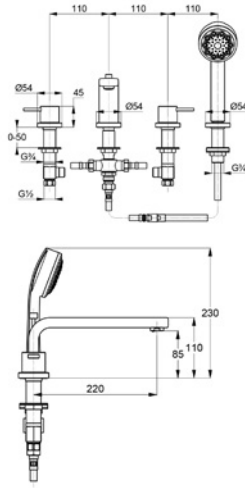












## KLUDI ZENTA

product	product description	surface	Art.-Nr.
	 <p><b>KLUDI ZENTA</b> <b>single lever bath- and shower mixer DN 15</b> stand assembly three hole deck mounted installation solid lever flow class D/B s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub retractable hand shower high pressure supply hose G 1/2 x G 1/2 x 600 mm protected against back flow projection 140 mm for bathtub rim mounting unit 7481200-00 or mounting plate 7614946-00</p> <p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p> <p>KLUDI ROTEXA MULTI bath rim assembly kit</p>	chrome 	<b>384460575</b>
	 <p><b>KLUDI ZENTA</b> <b>bath- and shower mixer DN 15</b> four hole tiles deck mounted installation stand assembly solid lever flow class C/B s-pointer aerator M 24 x 1 ceramic headpart 90° automatic diverter: shower/spray retractable hand shower protected against back flow flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm projection 220 mm noise level I</p> <p><b>required accessories:</b> mounting plate pre-installation set for three hole mixer</p> <p>KLUDI ROTEXA bath rim assembly kit</p>	chrome 	<b>384240575</b>
	 <p><b>KLUDI ZENTA</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever autom. diverter shower/bathtub ceramic cartridge with hot water limitation flow class D/C PA-IX 18967/IDC</p> <p><b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20</p>	chrome black/chrome white/chrome	<b>386500575</b> <b>386508675</b> <b>386509175</b>
			<b>88011</b>

94


















## KLUDI ZENTA





product	product description	surface	Art.-Nr.
 	<b>KLUDI bath filler with diverter DN 20</b> wall fastening flow class B aerator M 28 x 1 autom. diverter shower/bathtub protected against back flow with push-on rosette projection 170 mm	chrome	<b>1350105</b>
<b>Shower</b>  	<b>KLUDI ZENTA single lever shower mixer DN 15</b> solid lever wall fastening flow rate 9 l/min at 3 bar s-connections ceramic cartridge with hot water limitation protected against back flow shower outlet G 1/2 PA-IX 18637/IA	chrome black/chrome white/chrome	<b>388700575</b> <b>388708675</b> <b>388709175</b>
 	<b>KLUDI ZENTA thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve protected against back flow shower outlet G 1/2 s-connections dirt catcher sieves PA-IX 18064/IB	chrome black/chrome white/chrome 	<b>351000538</b> <b>351008638</b> <b>351009138</b>
 	<b>KLUDI ZENTA concealed single lever shower mixer</b> concealed valve with functional unit solid lever ceramic cartridge with hot water limitation flow class B PA-IX 18967/IDC  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome	<b>386550575</b>  <b>88011</b>
 	<b>KLUDI ZENTA concealed single lever shower mixer</b> concealed trim-set solid lever  <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome black/chrome white/chrome	<b>388600575</b> <b>388608675</b> <b>388609175</b>  <b>33434</b>



## KLUDI ZENTA




















product	product description		surface	Art.-Nr.
 	<b>KLUDI ZENTA</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C P-IX 18444/IIIC		chrome 	<b>388350545</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20			<b>88011</b>
<b>Accessories</b>				
		<b>concealed electronic body DN 15</b> <b>pre-installation set</b> without trim set in-wall installation ceramic cartridge powered by 230 V mains supply dirt catcher sieves backflow preventer		<b>38001</b>
		<b>concealed electronic body DN 15</b> <b>pre-installation set</b> without trim set in-wall installation ceramic cartridge powered by 6 V battery dirt catcher sieves backflow preventer		<b>38002</b>
		<b>concealed electronic body DN 15</b> <b>pre-installation set</b> without trim set in-wall installation for cold or premixed water connection powered by 230 V mains supply		<b>38003</b>
		<b>concealed electronic body DN 15</b> <b>pre-installation set</b> without trim set in-wall installation for cold or premixed water connection powered by 6 V battery		<b>38004</b>

**KLUDI ZENTA**

product	product description	surface	Art.-Nr.
	<b>KLUDI ZENTA spacer escutcheon for base for KLUDI ZENTA</b> for 38250, 38251, 38253, 38256, 38260, 38262, 38530, 38100, 38102, 38105, 38200, 38202, 38205	chrome	<b>7607105-00</b>
<b>Spare parts</b>			
 	<b>KLUDI ZENTA lever for single lever mixer</b> for 38244, 38245, 38250, 38251, 38256, 38260, 38262, 38530, 38670, 38870	chrome black/chrome white/chrome	<b>7466905-00</b> <b>7466986-00</b> <b>7466991-00</b>
	<b>KLUDI ZENTA lever for single lever mixer</b> for 38446, 38447, 38650, 38655, 38657, 38660, 38667, 38860	chrome black/chrome white/chrome	<b>7470005-00</b> <b>7470086-00</b> <b>7470091-00</b>














## KLUDI OBJEKTA

product	product description	surface	Art.-Nr.
<b>Basin</b>  	<b>KLUDI OBJEKTA single lever basin mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 80 mm	chrome  	<b>322330575</b>
 	<b>KLUDI OBJEKTA single lever basin mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 for use with displacement heaters spout height lower edge 80 mm	chrome  	<b>322340575</b>
 	<b>KLUDI OBJEKTA single lever basin mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar without pop-up waste rapid installation set flexible hoses G 3/8 spout height lower edge 80 mm	chrome  	<b>321260575</b>
 	<b>KLUDI OBJEKTA single lever basin mixer XL DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar flexible hoses G 3/8 rapid installation set pop-up waste G 1 1/4 spout height lower edge 100 mm	chrome  	<b>322600575</b>
 	<b>KLUDI OBJEKTA single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 4,3 l/min at 3 bar flow regulator M 18 x 1 ceramic cartridge swivelling spout pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 205 mm	chrome 	<b>320230575</b>



## KLUDI OBJEKTA

product	product description		surface	Art.-Nr.
		<b>KLUDI OBJEKTA single lever basin mixer DN 15</b> solid lever single hole mounted flow rate 4,3 l/min at 3 bar flow regulator M 18 x 1 ceramic cartridge with hot water limitation swivelling spout rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 205 mm	chrome 	<b>320240575</b>
		<b>KLUDI OBJEKTA basin mixer DN 15</b> solid lever three hole assembling flow rate 12 l/min at 3 bar caché-aerator M 21,5 x 1 fixed spout ceramic headpart 90° rapid installation set flexible hoses G 3/8 noise level I spout height lower edge 145 mm	chrome	<b>323930575</b>
<b>Bidet</b> 		<b>KLUDI OBJEKTA single lever bidet mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation ball joint caché aerator M 18,5 x 1 flow rate 7,4 l/min at 3 bar rapid installation set flexible hoses G 3/8 pop-up waste G 1 1/4	chrome 	<b>324160575</b>
<b>Bath</b> 		<b>KLUDI OBJEKTA single lever bath- and shower mixer DN 15</b> solid lever wall fastening ceramic cartridge with hot water limitation s-pointer aerator M 24 x 1 flow class C/B autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4	chrome 	<b>326530575</b>











100















## KLUDI OBJEKTA

product		product description	surface	Art.-Nr.
		<b>KLUDI OBJEKTA single lever bath- and shower mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation aerator M 24 x 1 flow class D/C autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow flexible hoses G 3/8 rapid installation set	chrome	<b>326850575</b>
		<b>KLUDI OBJEKTA single lever bath- and shower mixer DN 15</b> vertical bath/ shower mixer solid lever wall fastening ceramic cartridge with hot water limitation aerator M 28 x 1 flow class B/B autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4 distance from center to center 75 mm	chrome	<b>364890575</b>
		<b>KLUDI OBJEKTA concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C autom. diverter shower/bathtub PA-IX 18967/IDC <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome	<b>326500575</b>  <b>88011</b>
		<b>KLUDI OBJEKTA concealed single lever bath and shower mixer</b> concealed trim-set solid lever autom. diverter shower/bathtub <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	<b>326150575</b>  <b>33434</b>















## KLUDI OBJEKTA

product	product description	surface	Art.-Nr.
 	<b>KLUDI OBJEKTA</b> <b>concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class C/B autom. diverter shower/bathtub protected against back flow noise level I P-IX 19310/ICB  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome	326570575
 	<b>KLUDI OBJEKTA</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C flow class B P-IX 18444/IIIC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome 	358300538
<b>Shower</b>  	<b>KLUDI OBJEKTA</b> <b>single lever shower mixer DN 15</b> solid lever wall fastening ceramic cartridge with hot water limitation flow class C shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4	chrome	327640575
 	<b>KLUDI OBJEKTA</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve 50 % water consumption regulation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves P-IX 8049/IB DIN-DVGW-BM-0037	chrome 	352000538



## KLUDI OBJEKTA

product		product description	surface	Art.-Nr.
		<b>KLUDI OBJEKTA</b> <b>single lever shower mixer DN 15</b> vertical bath/ shower mixer solid lever wall fastening ceramic cartridge with hot water limitation flow class B shower outlet G 1/2 protected against back flow s-connections G 1/2 x G 3/4 distance from center to center 75 mm	chrome	<b>366510575</b>
		<b>KLUDI OBJEKTA</b> <b>concealed single lever shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class C PA-IX 18967/IDC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome	<b>326550575</b>  <b>88011</b>
		<b>KLUDI OBJEKTA</b> <b>concealed single lever shower mixer</b> concealed trim-set solid lever  <b>required accessories:</b> concealed mixer DN 15 pre-installation set	chrome	<b>328180575</b>  <b>33434</b>
		<b>KLUDI OBJEKTA</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C P-IX 18444/IIIC  <b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20	chrome 	<b>358350538</b>  <b>88011</b>
		<b>Thermostat</b> <b>concealed thermostatic mixer</b> concealed trim-set hot water safety device 38 °C with shut-off valve  <b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15	chrome 	<b>357300538</b>  <b>35156</b>


















## KLUDI OBJEKTA

product	product description	surface	Art.-Nr.
<b>Spare parts</b>	<b>KLUDI OBJEKTA lever</b> for 32233, 32234, 32126, 32260, 32416, 32235	chrome	<b>7504705-00</b>
			
	<b>KLUDI OBJEKTA lever</b> for 32489, 32491, 32615, 32650, 32651, 32653, 32655, 32657, 32685, 32764, 32818	chrome	<b>7504805-00</b>
			















## KLUDI PURE&STYLE

product		product description	surface	art. no.
Basin				
		<b>KLUDI PURE&amp;STYLE</b> <b>single lever basin mixer 60 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm	chrome 	<b>403850575</b>
		<b>KLUDI PURE&amp;STYLE</b> <b>single lever basin mixer 75 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome 	<b>403820575</b>
		<b>KLUDI PURE&amp;STYLE</b> <b>single lever basin mixer 75 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm	chrome 	<b>400280575</b>
		<b>KLUDI PURE&amp;STYLE</b> <b>single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>402900575</b>
		<b>KLUDI PURE&amp;STYLE</b> <b>single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>402920575</b>





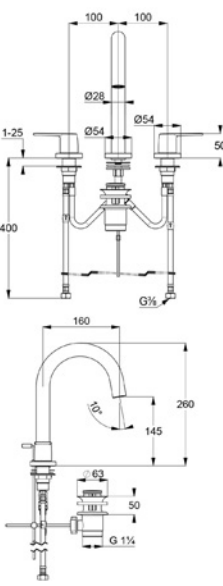






## KLUDI PURE&STYLE

product	product description	surface	art. no.
 	<b>KLUDI PURE&amp;STYLE single lever washbowl mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 215 mm	chrome 	<b>402960575</b>
 	<b>KLUDI PURE&amp;STYLE single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm	chrome 	<b>400240575</b>
 	<b>KLUDI PURE&amp;STYLE single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 220 mm	chrome 	<b>400250575</b>
 	<b>KLUDI PURE&amp;STYLE basin mixer DN 15</b> rotating handle three hole assembling flow rate 12 l/min at 3 bar caché-aerator M 21,5 x 1 fixed spout ceramic headpart 90° metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 145 mm	chrome 	<b>403930575</b>



## KLUDI PURE&amp;STYLE





product	product description	surface	art. no.
<b>Bidet</b> 	<b>KLUDI PURE&amp;STYLE single lever bidet mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm	chrome  	<b>402160575</b>
	<b>KLUDI PURE&amp;STYLE single lever bidet mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm	chrome  	<b>402170575</b>
<b>Bath</b> 	<b>KLUDI PURE&amp;STYLE single lever bath- and shower mixer DN 15</b> wall fastening solid lever flow class C/B flow regulator M 24 x 1 ceramic cartridge with hot water limitation autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections	chrome	<b>406810575</b>
	<b>KLUDI PURE&amp;STYLE bath- and shower mixer DN 15</b> stand assembly four hole tiles deck mounted installation solid handles Flow rate bath 22,5 l/min at 3 bar flow rate handshower 13,5 l/min bei 3 bar cascade aerator M 24 x 1 ceramic headpart 90° autom. diverter shower/bathtub protected against back flow retractable hand shower flexible high pressure supply hoses G 1/2 x G 1/2 x 400 mm projection 220 mm	chrome	<b>404250575</b>
	<b>required accessories:</b> mounting plate pre-installation set for four hole mixer		<b>7614846-00</b>
	KLUDI ROTEXA bath rim assembly kit	chrome	<b>7878205-00</b>

108





















## KLUDI PURE&amp;STYLE

product	product description		surface	art. no.
 	<b>KLUDI PURE&amp;STYLE concealed single lever shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C		chrome	<b>406550575</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20			<b>88011</b>
 	<b>KLUDI PURE&amp;STYLE concealed single lever shower mixer</b> concealed trim-set solid lever for pre-installation mixer 38828		chrome	<b>404200575</b>
	<b>required accessories:</b> concealed shower DN 15 pre-installation set			<b>38828</b>















## KLUDI PURE&SOLID

product		product description	surface	art. no.
Basin			chrome	343850575
		<b>KLUDI PURE&amp;SOLID</b> <b>single lever basin mixer 60 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm		
		<b>KLUDI PURE&amp;SOLID</b> <b>single lever basin mixer 75 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm		343820575
		<b>KLUDI PURE&amp;SOLID</b> <b>single lever basin mixer 75 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set for use with displacement heaters spout height lower edge 75 mm	 	342760575
		<b>KLUDI PURE&amp;SOLID</b> <b>single lever basin mixer 75 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 75 mm		340280575
		<b>KLUDI PURE&amp;SOLID</b> <b>single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm		342900575



# KLUDI PURE&SOLID

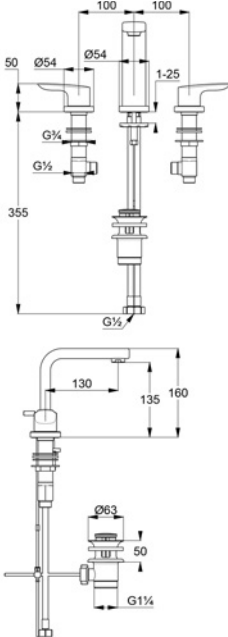product	product description	surface	art. no.
 	<b>KLUDI PURE&amp;SOLID single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>342920575</b>
 	<b>KLUDI PURE&amp;SOLID single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm	chrome 	<b>340240575</b>
 	<b>KLUDI PURE&amp;SOLID single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm	chrome 	<b>340250575</b>
 	<b>KLUDI PURE&amp;SOLID basin mixer DN 15</b> rotating handle three hole assembling flow rate 14,5 l/min at 3 bar caché-aerator M 21,5 x 1 fixed spout ceramic headpart 90° metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 135 mm	chrome 	<b>343940575</b>


112

<b>surface</b>	<b>art. no.</b>
----------------	-----------------

113


















## KLUDI PURE&SOLID

product	product description	surface	art. no.
	<b>KLUDI PURE&amp;SOLID</b> <b>concealed single lever shower mixer</b> concealed trim-set solid lever for pre-installation mixer 38828	chrome	<b>344200575</b>
	<b>required accessories:</b> concealed shower DN 15 pre-installation set		<b>38828</b>




















## KLUDI PURE&amp;EASY

product		product description	surface	art. no.
Basin		 <p><b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 60 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	<b>372850565</b>
		 <p><b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 60 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	<b>373850565</b>
		 <p><b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 60 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 60 mm</p>	chrome 	<b>373870565</b>
		 <p><b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome 	<b>372820565</b>
		 <p><b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm</p>	chrome white/chrome 	<b>373820565</b> <b>373829165</b>



















## KLUDI PURE&EASY

product		product description	surface	art. no.
		<b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm	chrome white/chrome 	<b>370280565</b> <b>370289165</b>
		<b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 2 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 70 mm	chrome 	<b>372860565</b>
		<b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever centre position cold water flow rate 7 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm	chrome  	<b>372890565</b>
		<b>KLUDI PURE&amp;EASY</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow rate 5 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 for use with displacement heaters spout height lower edge 70 mm	chrome  	<b>372760565</b>
		<b>KLUDI PURE&amp;EASY CARE</b> <b>single lever basin mixer 70 DN 15</b> single hole mounted public lever arm 120 mm ceramic cartridge with hot water limitation flow rate 7 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm	chrome 	<b>372840565</b>



















## KLUDI PURE&amp;EASY

product	product description	surface	art. no.
 	<b>KLUDI PURE&amp;EASY CARE single lever basin mixer 70 DN 15</b> single hole mounted clinic lever 180 mm ceramic cartridge with hot water limitation flow rate 7 l/min at 3 bar flow regulator M 24 x 1 metal pop-up waste G 1 1/4 rapid installation set flexible hoses G 3/8 spout height lower edge 70 mm	chrome 	<b>372870565</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer 70 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow rate 5 l/min at 3 bar flow regulator M 24 x 1 without pop-up waste rapid installation set flexible hoses G 3/8 for use with displacement heaters spout height lower edge 70 mm	chrome  	<b>372750565</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar plastic pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>371900565</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome white/chrome 	<b>372900565 372909165</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer 100 DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome white/chrome 	<b>372920565 372929165</b>








## KLUDI PURE&EASY

product	product description	surface	art. no.
 	<b>KLUDI PURE&amp;EASY single lever basin mixer DN 15</b> with additional hand shower, shower holder single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 7 l/min at 3 bar protected against back flow metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 100 mm	chrome 	<b>372590565</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm	chrome 	<b>370230565</b>
 	<b>KLUDI PURE&amp;EASY single lever basin mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 18 x 1 flow rate 5 l/min at 3 bar swivelling spout without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 205 mm	chrome 	<b>370240565</b>
<b>Bidet</b>  	<b>KLUDI PURE&amp;EASY single lever bidet mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar metal pop-up waste G 1 1/4 flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm	chrome white/chrome  	<b>375330565</b> <b>375339165</b>
 	<b>KLUDI PURE&amp;EASY single lever bidet mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation PCA s-pointer aerator M 24 x 1 flow rate 6 l/min at 3 bar without pop-up waste flexible hoses G 3/8 rapid installation set spout height lower edge 65 mm	chrome  	<b>375340565</b>




## KLUDI PURE&amp;EASY

product	product description	surface	art. no.
<b>Bath</b> 	<b>KLUDI PURE&amp;EASY single lever bath- and shower mixer DN 15</b> wall fastening solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class C/B autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections	chrome white/chrome	<b>376810565</b> <b>376819165</b>
	<b>KLUDI PURE&amp;EASY single lever bath- and shower mixer DN 15</b> wall fastening solid lever distance from center to center 45 mm ceramic cartridge with hot water limitation swivelling spout 250 mm aerator M 24 x 1/B, flow class B/A autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections tele-hand shower DN 15 white plastic-hose white G 1/2 x G 1/2 x 1250 mm Tele-wall holder transparent	chrome	<b>375920565</b>
	<b>KLUDI PURE&amp;EASY single lever bath- and shower mixer DN 15</b> wall fastening solid lever distance from center to center 45 mm ceramic cartridge with hot water limitation swivelling spout 250 mm aerator M 24 x 1/B flow class B/A autom. diverter shower/bathtub shower outlet G 1/2 protected against back flow s-connections	chrome	<b>375910565</b>
	<b>KLUDI PURE&amp;EASY concealed single lever bath and shower mixer</b> concealed valve with functional unit solid lever wall fastening ceramic cartridge with hot water limitation flow class D/C autom. diverter shower/bathtub  <b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20	chrome	<b>376500565</b>  <b>88011</b>
	<b>KLUDI PURE&amp;EASY concealed single lever bath and shower mixer</b> concealed trim-set solid lever autom. diverter shower/bathtub for pre-installation mixer 38636  <b>required accessories:</b> concealed bath- and shower mixer DN 15 pre-installation set	chrome	<b>374190565</b>  <b>38636</b>

120













## KLUDI STANDARD

product		product description	surface	art. no.
Basin			chrome	210370515
			chrome	210350515
			chrome	210620515
			chrome	210600515
			chrome	210580515













## KLUDI STANDARD

product	product description	surface	art. no.
 	<b>KLUDI STANDARD pillar valve DN 15</b> single hole mounted flow rate 12 l/min at 3 bar swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 marking: blue/red PA-IX 1247/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic spout height lower edge 180 mm	chrome chrome	<b>204070508</b> <b>204070515</b>
 	<b>KLUDI STANDARD pillar valve DN 15</b> single hole mounted flow rate 12 l/min at 3 bar casted spout aerator M 24 x 1 marking: blue/red P-IX 1116/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic spout height lower edge 50 mm	chrome chrome	<b>200130508</b> <b>200130515</b>
<b>Bath</b>  	<b>KLUDI STANDARD CARE wall fitting DN 15</b> wall fastening flow rate 8 l/min at 3 bar casted spout care-aerator M 24 x 1 s-connections PA-IX 8668/IZ handle 08 = handle Terralux metal	chrome	<b>320040508</b>
 	<b>KLUDI STANDARD bath- and shower mixer DN 15</b> wall fastening flow class B/B casted spout aerator M 28 x 1 s-connections autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 PA-IX 8525/IBB handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome chrome	<b>251250508</b> <b>251250515</b>
 	<b>KLUDI STANDARD bath- and shower mixer DN 15</b> wall fastening flow class B/B casted spout aerator M 24 x 1 s-connections autom. diverter shower/bathtub protected against back flow shower outlet G 3/4 PA-IX 8562/IBB handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome chrome	<b>250010508</b> <b>250010515</b>











# KLUDI STANDARD

product	product description	surface	art. no.
 	<b>KLUDI STANDARD bath- and shower mixer DN 15</b> wall fastening flow class B/B casted spout with aerator M 24 x 1 s-connections autom. diverter shower/bathtub protected against back flow cradle hook tele-hand shower DN 15 white plastic-hose white 1250 mm PA-IX 8562/IBB handle 15 = handle Terralux plastic	chrome	<b>250070515</b>
 	<b>KLUDI STANDARD bath- and shower mixer DN 15</b> wall fastening distance from center to center 120 mm flow class A/B swivelling tube spout (360°) aerator M 22 x 1 s-connections manual diverter shower/bathtub protected against back flow shower outlet G 3/4 handle 08 = handle Terralux metal	chrome	<b>262090508</b>
 	<b>KLUDI SPECIAL bath- and shower mixer DN 15</b> wall fastening flow class B/A swivelling spout 200 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 3/4 handle 15 = handle Terralux plastic	chrome	<b>251010515</b>
 	<b>KLUDI SPECIAL bath- and shower mixer DN 15</b> wall fastening flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 3/4 handle 15 = handle Terralux plastic	chrome	<b>251110515</b>
 	<b>KLUDI SPECIAL bath- and shower mixer DN 15</b> wall fastening distance from center to center 45 mm flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 1/2 P-IX 4087/IIBA handle 15 = handle Terralux plastic	chrome	<b>254110515</b>



## KLUDI STANDARD

product	product description	surface	art. no.
 	<b>KLUDI SPECIAL bath- and shower mixer DN 15</b> wall fastening distance from center to center 45 mm flow class B/A swivelling spout 250 mm aerator M 22 x 1 autom. diverter shower/bathtub protected against back flow tele-hand shower DN 15 white plastic-hose white 1250 mm Tele-wall holder transparent s-connections G 1/2 x G 1/2 P-IX 4087/II/BA handle 15 = handle Terralux plastic	chrome	<b>254130515</b>
 	<b>KLUDI STANDARD bath filler DN 20</b> with wall flange (escutcheon) aerator M 28 x 1 projection 150 mm noise level I	chrome	<b>1350205</b>
<b>Shower</b>  	<b>KLUDI STANDARD shower mixer DN 15</b> wall fastening flow class B s-connections shower outlet G 3/4 protected against back flow P-IX 8563/IB handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome chrome	<b>262020508</b> <b>262020515</b>
 	<b>KLUDI STANDARD shower mixer DN 15</b> wall fastening distance from center to center 120 mm flow class B s-connections shower outlet G 1/2 protected against back flow handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome	<b>261010508</b>















## KLUDI STANDARD

product		product description	surface	art. no.
 		<b>KLUDI STANDARD</b> <b>concealed valve, trim set</b> set 2 – trim set existing of: handle, sleeve, flange adjustable extension marking: blue/red handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome	<b>143030508</b>
			chrome	<b>143030515</b>
		<b>required accessories:</b> concealed valve DN 15 connection G 1/2		<b>29209</b>
		concealed valve DN 20 connection G 3/4		<b>29211</b>
		concealed valve DN 25 connection G 1		<b>29213</b>
		concealed valve DN 12 soldered connection 15 mm		<b>29509</b>
		concealed valve DN 20 soldered connection 22 mm		<b>29511</b>
 		<b>KLUDI STANDARD</b> <b>concealed valve</b> trim set lock shield	chrome	<b>142030519</b>
		<b>required accessories:</b> concealed valve DN 15 connection G 1/2		<b>29209</b>
		concealed valve DN 20 connection G 3/4		<b>29211</b>
		concealed valve DN 25 connection G 1		<b>29213</b>
		concealed valve DN 12 soldered connection 15 mm		<b>29509</b>
		concealed valve DN 20 soldered connection 22 mm		<b>29511</b>
		concealed valve DN 25 soldered connection 28 mm		<b>29513</b>
		concealed valve DN 15 soldered connection 18 mm		<b>29527</b>
		concealed valve DN 15 connection G 1/2		<b>29809</b>
		concealed valve DN 20 connection G 3/4		<b>29811</b>
		concealed valve DN 20 soldered connection 22 mm		<b>29911</b>



## KLUDI STANDARD









product	product description	surface	art. no.
<b>Accessories</b>  	<b>KLUDI pillar connections</b> (per pair)	chrome	<b>7598205-00</b>
 	<b>KLUDI STANDARD outlet bend DN 15</b> with compression joint	chrome	<b>1200305</b>
<b>Spare parts</b>  	<b>KLUDI STANDARD handle 08</b> handle Terralux metal marking: blue	chrome	<b>7542105-00</b>
 	<b>KLUDI STANDARD handle 08</b> handle Terralux metal marking: red	chrome	<b>7542205-00</b>
 	<b>KLUDI STANDARD handle 15</b> handle Terralux plastic marking: blue	chrome	<b>7636005-00</b>

**KLUDI STANDARD**

product	product description		surface	art. no.
 	<b>KLUDI STANDARD handle 15</b> handle Terralux plastic marking: red		chrome	<b>7636105-00</b>












## KLUDI PUSH

product		product description	surface	art. no.
Shower		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for one outlet ceramic cartridge with hot water limitation metal rotating handle soft-edge escutcheon	chrome	<b>386010538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for one outlet ceramic cartridge with hot water limitation metal rotating handle soft-edge escutcheon	chrome	<b>386030538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle soft-edge escutcheon	chrome	<b>386110538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon	chrome 	<b>388010538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon	chrome	<b>388030538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>



## KLUDI PUSH

product	product description		surface	art. no.
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon	chrome 	<b>388110538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for one outlet ceramic cartridge with hot water limitation metal rotating handle round escutcheon	chrome	<b>386020538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for one outlet ceramic cartridge with hot water limitation metal rotating handle round escutcheon	chrome	<b>386040538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed mixer</b> with push-button on/off control for two outlets ceramic cartridge with hot water limitation metal rotating handle round escutcheon	chrome	<b>386120538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C round escutcheon	chrome 	<b>388020538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>













## KLUDI PUSH

product	product description		surface	art. no.
 	<b>KLUDI PUSH</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C round escutcheon		chrome 	<b>388120538</b>
	<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20			<b>88011</b>








## PRE-INSTALLATION SETS

product	product description	surface	art. no.
 	<b>angle valve DN 15</b> <b>G 1/2 x G 3/8 x Ø 10 mm</b> cylindrical handle wall fastening flow class B ceramic headpart 90° without marking rosette diameter Ø 50 mm	chrome	<b>1584505-00</b>
 	<b>angle valve DN 15</b> <b>G 1/2 x G 3/8 x Ø 10 mm</b> cylindrical handle wall fastening flow class D Classical lift-cone headpart G 1/2 without marking rosette diameter Ø 50 mm	chrome	<b>1584605-00</b>
 	<b>installation set DN 15</b> <b>for concealed two hole wall mounted basin mixer</b> for concealed installation flow rate 16 l/min at 3 bar ceramic cartridge K-36 with hot water limitation pre-installation plug G 1/2 mounting-depth-compensation 30 mm connection G 1/2 without trim set noise level I		<b>38242</b>
 	<b>installation set DN 15</b> <b>for concealed two hole wall mounted basin mixer</b> for concealed installation flow rate 16 l/min at 3 bar ceramic cartridge K-35 with hot water limitation pre-installation plug G 1/2 mounting-depth-compensation 30 mm connection G 1/2 without trim set noise level I		<b>38243</b>
 	<b>KLUDI FLEXX.BOXX</b> <b>concealed body DN 20</b> pre-installation set without trim set without functional unit in-wall installation with one-piece elastomere-coating with protection cap for skeleton with additional tight gasket with flushing set dezincification resistant brass P-IX 19310/ICB		<b>88011</b>













## PRE-INSTALLATION SETS

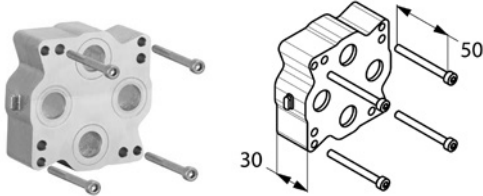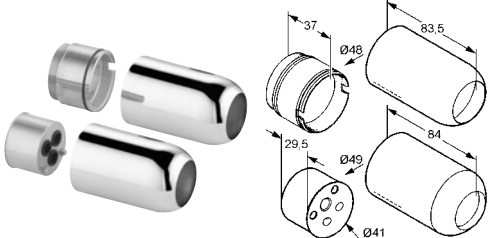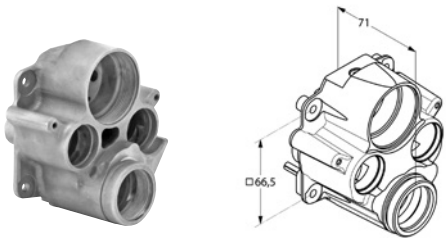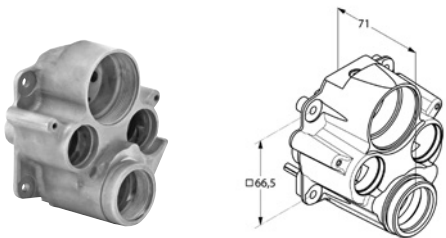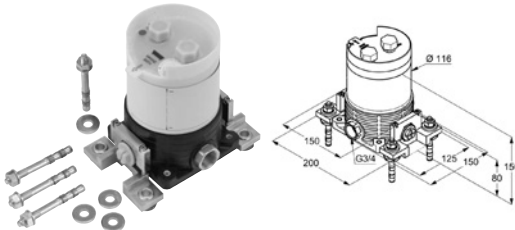product	product description	surface	art. no.
	<b>concealed extension set for trim set suitable to KLUDI FLEXX.BOX 88011</b> L = 30 mm dezincification resistant brass DIN 50930-6	neutral	<b>7300600-00</b>
	<b>adaptor for wrong installed function part for KLUDI FLEXX.BOX single lever variants</b> (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011	neutral	<b>7458000-00</b>
	<b>adaptor for wrong installed function part for KLUDI FLEXX.BOX THM variants</b> (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011 for trim set till 02/2018	neutral	<b>7400100-00</b>
	<b>adaptor for wrong installed function part for KLUDI FLEXX.BOX THM variants</b> (reserved cold and hot water supply) dezincification resistant brass for KLUDI FLEXX.BOX 88011 for trim set from 03/2018	neutral	<b>7653900-00</b>
	<b>KLUDI FLEXX.BOX concealed unit DN 20</b> for freestanding bath- and shower mixer for floor mounting with one-piece elastomere-coating dezincification resistant brass with protection cap for skeleton with self-sealing sleeve with flushing set without stand fitting without extension set		<b>88088</b>





## PRE-INSTALLATION SETS

product		product description	surface	art. no.
 		<b>concealed mixer DN 15 pre-installation set</b> without trim set in-wall installation flow class B/B ceramic cartridge with hot water limitation with self-sealing sleeve for concealed dry-installation P-IX 9734/IBB		<b>33434</b>
 		<b>extension for concealed body 33434</b> 30 mm length	chrome	<b>7423305-00</b>
 		<b>concealed assembly set for pre-wall installation</b> for concealed body 33434, 35424, 33424	neutral	<b>7642400-00</b>
 		<b>concealed mixer DN 15 pre-installation set</b> without trim set in-wall installation flow class B/B ceramic cartridge with hot water limitation noise level I PA-IX 8281/IBB		<b>38625</b>
 		<b>concealed bath- and shower mixer DN 15 pre-installation set</b> without trim set in-wall installation flow rate 24 l/min at 3 bar ceramic cartridge with hot water limitation		<b>38636</b>











## PRE-INSTALLATION SETS

product	product description	surface	art. no.
 	<b>concealed shower DN 15 pre-installation set</b> without trim set in-wall installation flow class B ceramic cartridge with hot water limitation		<b>38828</b>
 	<b>extension for concealed bath and shower mixer</b> 38624, 38625 30 mm length	chrome	<b>7598005-00</b>
 	<b>extension for concealed shower mixer 38826, 38625, 38243</b> for pre-installation set 38243 30 mm length	chrome	<b>7598105-00</b>
 	<b>extension for concealed two hole wall mounted basin mixer</b> for pre-installation set 38242	neutral	<b>7357500-00</b>
 	<b>extension for concealed body</b> 38636, 38828	neutral	<b>7666100-00</b>











## PRE-INSTALLATION SETS

product	product description	surface	art. no.
	 <p><b>Thermostat concealed thermostatic mixer DN 15</b> pre-installation set without trim set in-wall installation flow class B with therm E-cartridge with shut-off valve dirt catcher sieves PA-IX 8409/IB</p>		<b>35156</b>
	 <p><b>extension for concealed thermostatic mixer</b> with shut-off valve 35156 30 mm length</p>	chrome	<b>7573105-00</b>
	 <p><b>Thermostat concealed thermostatic mixer DN 15</b> pre-installation set without trim set in-wall installation flow class B with therm E-cartridge without shut-off valve dirt catcher sieves P-IX 8410/II</p>		<b>35158</b>
	 <p><b>extension for concealed thermostatic mixer</b> without shut-off valve 35158 30 mm length</p>	chrome	<b>7573005-00</b>




## PRE-INSTALLATION SETS

product	product description	surface	art. no.
 	<b>Thermostat concealed thermostatic mixer DN 20</b> pre-installation set without trim set in-wall installation flow class D without shut-off valve dirt catcher sieves P-IX 8574/II		<b>35093</b>
 	<b>extension for concealed thermostatic mixer</b> without shut-off valve 35093 30 mm length	chrome	<b>7572705-00</b>
 	<b>three-way diverter DN 15 set 1 – pre-installation</b> in-wall installation diverter 1 connection G 3/4 3 spouts G 1/2		<b>29757</b>
 	<b>two-way diverter DN 15 set 1 – pre-installation</b> in-wall installation diverter 1 connection G 1/2 2 spouts G 1/2		<b>29747</b>













## PRE-INSTALLATION SETS

product		product description	surface	art. no.
 		<b>two-way diverter DN 15 set 1 – pre-installation</b> in-wall installation diverter 2 connections G 1/2 tub spout G 3/4 shower outlet G 1/2	neutral	<b>2975100</b>
 		<b>concealed valve DN 15 connection G 1/2</b> set 1 – pre-installation sleeve PA-IX 9923/I		<b>29209</b>
 		<b>concealed valve DN 20 connection G 3/4</b> set 1 – pre-installation sleeve PA-IX 2427/I		<b>29211</b>
 		<b>concealed valve DN 25 connection G 1</b> set 1 – pre-installation sleeve PA-IX 2483/I		<b>29213</b>













## PRE-INSTALLATION SETS

product		product description	surface	art. no.
		<b>concealed valve DN 32</b> <b>connection G 1 1/4</b> set 1 – pre-installation sleeve		29215
		<b>concealed valve DN 15</b> <b>connection G 1/2</b> set 1 – pre-installation ceramic headpart sleeve noise level I		29809
		<b>concealed valve DN 20</b> <b>connection G 3/4</b> set 1 – pre-installation ceramic headpart sleeve noise level I		29811
		<b>concealed valve DN 20</b> <b>connection G 3/4</b> set 1 – pre-installation ceramic headpart 90° sleeve		53811
		<b>concealed valve DN 12</b> <b>soldered connection 15 mm</b> set 1 – pre-installation sleeve PA-IX 9923/I		29509





## PRE-INSTALLATION SETS

product		product description	surface	art. no.
		<b>concealed valve DN 15</b> <b>soldered connection 18 mm</b> set 1 – pre-installation sleeve PA-IX 2427/I		<b>29527</b>
		<b>concealed valve DN 20</b> <b>soldered connection 22 mm</b> set 1 – pre-installation sleeve PA-IX 2427/I		<b>29511</b>
		<b>concealed valve DN 25</b> <b>soldered connection 28 mm</b> set 1 – pre-installation sleeve PA-IX 2483/I		<b>29513</b>
		<b>concealed valve DN 20</b> <b>soldered connection 22 mm</b> set 1 – pre-installation ceramic headpart sleeve		<b>29911</b>
		<b>extension</b> <b>for concealed valve G 1/2 - G 1 1/4</b> 40 mm length	chrome	<b>7507905-00</b>




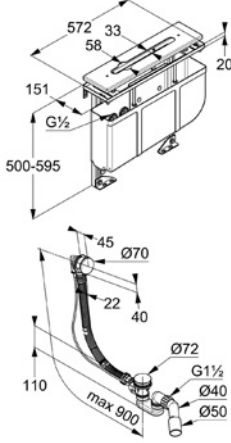

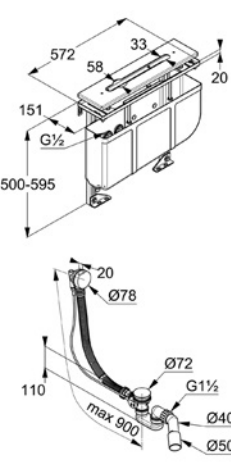
## PRE-INSTALLATION SETS

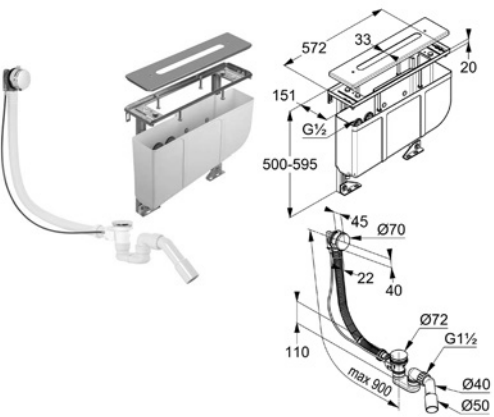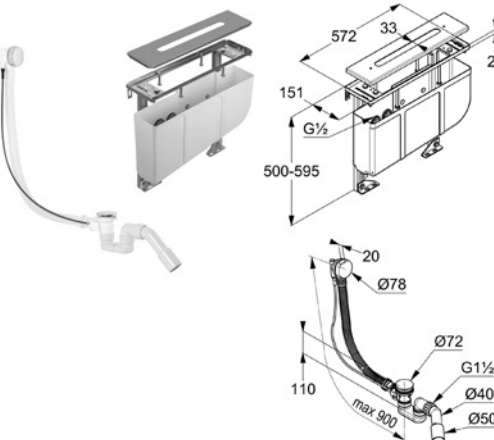product	product description	surface	art. no.
	<p><b>KLUDI ROTEXA MULTI bath rim assembly kit</b> pre-installation set and trim set for 4-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps bath filling, waste and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 16021..</p>	chrome	<b>7879405-00</b>
	<p><b>KLUDI ROTEXA bath rim assembly kit</b> pre-installation set and trim set for 4-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps pop-up and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 16021..</p>	chrome	<b>7878205-00</b>















## PRE-INSTALLATION SETS

product	product description	surface	art. no.
	<b>KLUDI ROTEXA MULTI bath rim assembly kit</b> pre-installation set and trim set for 3-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps bath filling, waste and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 1602405	chrome	<b>7880205-00</b>
			
	<b>KLUDI ROTEXA MULTI bath rim assembly kit</b> pre-installation set and trim set for 3-hole fittings to be covered by tiles or with visible mounting plate with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection with leak water container incl. back flow preventer with connecting hose incl. hose clamps pop-up and overflow set G 1 1/2 with dripping water adapter without screw-kit 76156.-00 without visible mounting plate art. no 1602405	chrome	<b>7881205-00</b>
			



## PRE-INSTALLATION SETS

product	product description	surface	art. no.
 	<b>mounting plate pre-installation set for four hole mixer</b> with frame anchor to be covered by tiles with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection without screw-kit 76156.-00		<b>7614846-00</b>
 	<b>visible mounting plate for combination with mounting plate 76148</b> and assembly package 74662, 74794	chrome gold plated 23 carat	<b>1602105</b> <b>1602145</b>
 	<b>mounting plate pre-installation set for three hole mixer</b> with frame anchor to be covered by tiles with 2 pressure hoses G 1/2 x G 1/2 x 400 mm for angle valve connection without screw-kit 76156.-00		<b>7614946-00</b>
 	<b>visible mounting plate for combination with mounting plate 76149</b> and assembly package 74802, 75802	chrome	<b>1602405</b>
 	<b>screw set trim set</b> for mounting plate 76148, 76149 and assembly package 74662, 74802, 75802, 74794	chrome gold plated 23 carat	<b>7615605-00</b> <b>7615645-00</b>



# Thermostat



---

**Thermostat  
surface-mounted**  
144



---

**KLUDI PUSH**  
146












---

**Thermostat concealed**  
147















## THERMOSTAT

product	product description	surface	art. no.
<b>Thermostat surface-mounted</b> 	<b>KLUDI AMBA</b> <b>thermostatic bath- and shower mixer DN 15</b> wall fastening, flow class B cascade aerator M 28 x 1 temperature control handle with hot water safety device 38° C with shut-off valve 50 % water consumption regulation autom. diverter shower/bathtub protected against back flow according to DIN EN 1717 temperature insulated body dirt catcher sieves, shower outlet G 1/2 s-connections handle metal	chrome  	<b>534010538</b>
	<b>KLUDI BALANCE</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C ceramic shut-off valve 180° 50 % water consumption regulation protected against back flow pre-installed dirt cleaner sieve shower outlet G 1/2 s-connections handle metal	chrome 	<b>352500575</b>
	<b>KLUDI BOZZ</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve s-connections protected against back flow dirt catcher sieves shower outlet G 1/2 P-IX 8049/IB	chrome 	<b>352030538</b>
	<b>KLUDI OBJEKTA</b> <b>thermostatic bath- and shower mixer DN 15</b> wall fastening temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 bath rotary valve to the rear Shower: Rotary valve forward flow regulator M 28 x 1 flow rate bath 23,8 l/min at 3 bar flow rate handshower 18,7 l/min bei 3 bar protected against back flow dirt catcher sieves s-connections	chrome 	<b>352010538</b>



## THERMOSTAT

product	product description	surface	art. no.
 	<b>KLUDI ZENTA</b> <b>thermostatic bath- and shower mixer DN 15</b> wall fastening flow class B aerator M 24 x 1/B temperature control handle with hot water safety device 38° C ceramic headpart 90° protected against back flow autom. diverter shower/bathtub shower outlet G 1/2 s-connections dirt catcher sieves	chrome white/chrome black/chrome 	<b>351010538</b> <b>351019138</b> <b>351018638</b>
 	<b>KLUDI ZENTA</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve protected against back flow shower outlet G 1/2 s-connections dirt catcher sieves PA-IX 18064/IB	chrome white/chrome black/chrome 	<b>351000538</b> <b>351009138</b> <b>351008638</b>
 	<b>KLUDI OBJEKTA</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow class B temperature control handle with hot water safety device 38° C with shut-off valve 50 % water consumption regulation protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4 dirt catcher sieves P-IX 8049/IB DIN-DVGW-BM-0037	chrome 	<b>352000538</b>
 	<b>KLUDI BASIC</b> <b>thermostatic shower mixer DN 15</b> wall fastening flow rate 25 l/min at 3 bar temperature control handle with hot water safety device 38° C ceramic headpart 180° protected against back flow shower outlet G 1/2 s-connections G 1/2 x G 3/4	chrome 	<b>350020538</b>



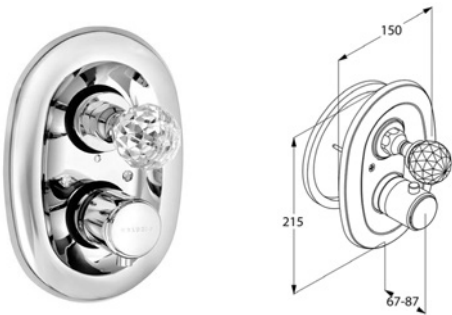

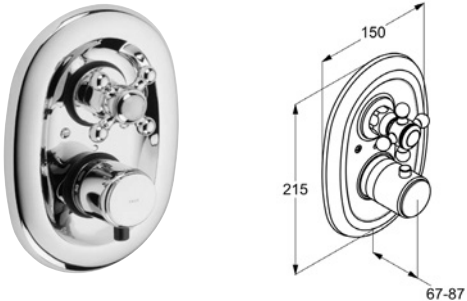

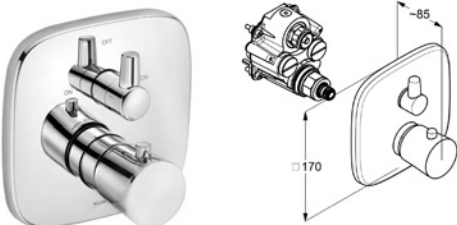

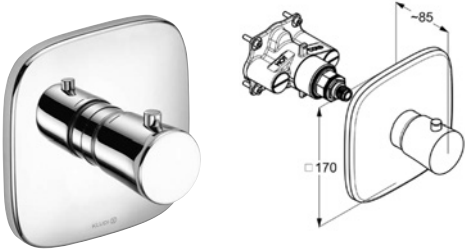



## THERMOSTAT

product	product description		surface	art. no.
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon	chrome 	<b>388010538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C soft-edge escutcheon	chrome	<b>388030538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C soft-edge escutcheon	chrome 	<b>388110538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for one outlet hot water safety device 38 °C round escutcheon	chrome 	<b>388020538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI PUSH concealed thermostatic shower mixer</b> concealed valve with functional unit with push-button on/off control for two outlets hot water safety device 38 °C round escutcheon	chrome 	<b>388120538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>








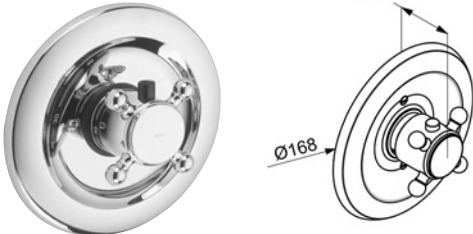









## THERMOSTAT

product		product description	surface	art. no.
Thermostat concealed		<b>KLUDI ADLON</b> <b>concealed thermostatic mixer</b> cross handle concealed trim-set hot water safety device 40 °C without shut-off valve	chrome gold plated 23 carat	<b>517190520</b> <b>517194520</b>
		<b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15		<b>35158</b>
		<b>KLUDI ADLON</b> <b>concealed thermostatic mixer</b> crystal handle "Made with Swarovski® Elements" concealed trim-set hot water safety device 40 °C with shut-off valve	chrome gold plated 23 carat	<b>5172005G5</b> <b>5172045G4</b>
		<b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15		<b>35156</b>
		<b>KLUDI ADLON</b> <b>concealed thermostatic mixer</b> cross handle concealed trim-set hot water safety device 40 °C with shut-off valve	chrome gold plated 23 carat	<b>517200520</b> <b>517204520</b>
		<b>required accessories:</b> Thermostat concealed thermostatic mixer DN 15		<b>35156</b>
		<b>KLUDI AMBA</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B	chrome	<b>538300575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI AMBA</b> <b>concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar	chrome	<b>537290575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>


















## THERMOSTAT

product	product description	surface	art. no.
	 <p><b>KLUDI E2</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C flow class B</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	<b>498300575</b>
	 <p><b>KLUDI E2</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	<b>498350575</b>
	 <p><b>KLUDI E2</b> <b>concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve hot water safety device 38 °C flow rate 40 l/min at 3 bar</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome 	<b>497290575</b>
	 <p><b>KLUDI BALANCE</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve cylindrical handle, metal hot water safety device 38 °C flow class B P-IX 18444/IICC</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome white/chrome matt black/ chrome 	<b>528300575</b> <b>528309175</b> <b>528308775</b> <b>NEW</b>
	 <p><b>KLUDI BALANCE</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve cylindrical handle, metal hot water safety device 38 °C P-IX 18444/IICC</p> <p><b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20</p>	chrome matt black/ chrome 	<b>528350575</b> <b>528358775</b> <b>NEW</b>











## THERMOSTAT

product	product description		surface	art. no.
		<b>KLUDI BALANCE</b> <b>concealed thermostatic mixer DN 20</b> concealed valve with functional unit without shut-off valve cylindrical handle, metal hot water safety device 38 °C flow rate 40 l/min at 3 bar	chrome white/chrome matt black/ chrome	<b>527290575</b> <b>527299175</b> <b>527298775</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>NEW</b>  <b>88011</b>
		<b>KLUDI OBJEKTA</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C flow class B P-IX 18444/IIIC	chrome	<b>358300538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>
		<b>KLUDI OBJEKTA</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C P-IX 18444/IIIC	chrome	<b>358350538</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>
		<b>KLUDI AMEO</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C	chrome	<b>418300575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>
		<b>KLUDI AMEO</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C	chrome	<b>418350575</b>
		<b>required accessories:</b> KLUDI FLEXX.BOXX concealed body DN 20		<b>88011</b>



## THERMOSTAT

product	product description		surface	art. no.
		<b>KLUDI ZENTA</b> <b>concealed thermostatic bath- and shower mixer</b> concealed valve with functional unit with ceramic shut-off valve and diverter as rotary valve hot water safety device 38 °C flow class B P-IX 18444/II/C	chrome 	<b>388300545</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>
		<b>KLUDI ZENTA</b> <b>concealed thermostatic shower mixer</b> concealed valve with functional unit with ceramic shut-off valve hot water safety device 38 °C P-IX 18444/II/C	chrome 	<b>388350545</b>
		<b>required accessories:</b> KLUDI FLEXX.BOX concealed body DN 20		<b>88011</b>



# Bathroom accessories



---

**KLUDI AMBA**  
152



---

**KLUDI E2**  
155













## KLUDI AMBA

product		product description	surface	art. no.
Basin	 	<b>KLUDI AMBA glass holder</b> wall fastening porcelain glass with mounting material	chrome	<b>5397505</b>
	 	<b>KLUDI AMBA liquid soap dispenser</b> wall fastening porcelain container with mounting material	chrome	<b>5397605</b>
	 	<b>KLUDI AMBA soap dish</b> wall fastening porcelain dish with mounting material	chrome	<b>5398505</b>
	 	<b>KLUDI AMBA hook</b> wall fastening with mounting material	chrome	<b>5398405</b>
	 	<b>KLUDI AMBA towel holder</b> two-armed, fixed wall fastening with mounting material	chrome	<b>5397705</b>





## KLUDI AMBA

product	product description	surface	art. no.
<b>Bath</b>			
	 <p><b>KLUDI AMBA bath towel holder</b> L = 850 mm wall fastening with mounting material</p>	chrome	<b>5397905</b>
	 <p><b>KLUDI AMBA bath towel holder</b> L = 650 mm wall fastening with mounting material</p>	chrome	<b>5398005</b>
	 <p><b>KLUDI AMBA bath handle</b> L = 350 mm wall fastening with mounting material</p>	chrome	<b>5398105</b>
<b>WC</b>			
	 <p><b>KLUDI AMBA toilet brush holder</b> wall fastening porcelain container with mounting material</p>	chrome	<b>5397405</b>
	 <p><b>KLUDI AMBA paper-holder</b> wall fastening with mounting material</p>	chrome	<b>5397105</b>













## KLUDI AMBA

product	product description	surface	art. no.
	 <p><b>KLUDI AMBA</b> <b>spare toilet paper holder</b> wall fastening with mounting material for one roll</p>	chrome	<b>5397205</b>













## KLUDI E2

product		product description	surface	art. no.
<b>Basin</b>			<b>KLUDI E2 glass holder</b> wall fastening mouth-blown opal glass, white, matte with mounting material	chrome <b>4997505</b>
			<b>KLUDI E2 universal glass holder</b> wall fastening with multifunctional frame, removable mouth-blown opal glass, white, matte with mounting material	chrome <b>4998205</b>
			<b>KLUDI E2 liquid soap dispenser</b> wall fastening mouth-blown opal glass, white, matte with mounting material	chrome <b>4997605</b>
			<b>KLUDI E2 soap dish</b> wall fastening opal glass, white, matte with mounting material	chrome <b>4998505</b>
			<b>KLUDI E2 shelf</b> wall fastening opal glass, white, matte with mounting material	chrome <b>4998705</b>













## KLUDI E2

product	product description	surface	art. no.
 	<b>KLUDI E2 tealight holder</b> wall fastening opal glass, white, matte with tealight with mounting material	chrome	<b>4998305</b>
 	<b>KLUDI E2 hook</b> wall fastening with mounting material	chrome	<b>4998405</b>
 	<b>KLUDI E2 double towel holder</b> L = 455 mm wall fastening two-armed, fixed with mounting material	chrome	<b>4997705</b>
 	<b>KLUDI E2 double towel holder XS</b> L = 300 mm wall fastening two-armed, fixed with mounting material	chrome	<b>4999005</b>
<b>Bath</b>  	<b>KLUDI E2 bath towel holder</b> L = 850 mm wall fastening with mounting material	chrome	<b>4997905</b>





## KLUDI E2

product	product description	surface	art. no.
 	<b>KLUDI E2 bath towel holder</b> L = 650 mm wall fastening with mounting material	chrome	<b>4998005</b>
 	<b>KLUDI E2 bath handle</b> L = 350 mm wall fastening with mounting material	chrome	<b>4998105</b>
<b>WC</b>  	<b>KLUDI E2 paper-holder</b> wall fastening with mounting material	chrome	<b>4997105</b>
 	<b>KLUDI E2 spare toilet paper holder</b> wall fastening with mounting material	chrome	<b>4997205</b>
 	<b>KLUDI E2 toilet brush holder</b> wall fastening mouth-blown opal glass, white, matte with mounting material	chrome	<b>4997405</b>





# Showers



**KLUDI ADLON**  
160



**KLUDI NOVA FONTE**  
162



**KLUDI FIZZ**  
165



**KLUDI FRESHLINE**  
170



**KLUDI A-QA**  
175



**KLUDI ZENTA**  
187



**KLUDI LOGO**  
192




**KLUDI COCKPIT**  
203



**Shower Systeme**  
204



**Special showers**  
214





**Shower hoses**  
217



**Accessories for all  
shower ranges**  
219



## KLUDI ADLON

product	product description	surface	art. no.
<b>shower sets</b>  	<b>KLUDI ADLON shower set</b> consisting of: wall rail 600 mm hand shower KLUDI ADLON sliding joint shower hose G 1/2 x G 1/2 x 1500 mm flow rate 22,5 l/min at 3 bar	chrome gold plated 23 carat	<b>2710305</b> <b>2710345</b>
<b>head showers</b>  	<b>KLUDI ADLON head shower DN 15</b> Ø 200 mm quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome gold plated 23 carat	<b>2751005</b> <b>2751045</b>
 	<b>KLUDI ADLON shower arm DN 15</b> for head shower DN 15 projection 415 mm with push-on rosette diameter 55 mm	chrome gold plated 23 carat	<b>2751405</b> <b>2751445</b>
<b>bath sets</b>  	<b>KLUDI ADLON shower set DN 15</b> wall fastening flow class B consisting of: hand shower KLUDI ADLON cradle wall holder shower hose G 1/2 x G 1/2 x 1500 mm connection angle DN 15	chrome gold plated 23 carat	<b>2710505</b> <b>2710545</b>
 	<b>KLUDI ADLON shower set</b> stand assembly flow class B consisting of: hand shower KLUDI ADLON shaft for shower hose shower hose 2000 mm	chrome gold plated 23 carat	<b>2705105</b> <b>2705145</b>









## KLUDI ADLON

product	product description	surface	art. no.
<b>Accessories</b>	<b>KLUDI ADLON</b> <b>connection angle DN 15</b> Cover rosette Ø 56 mm	chrome gold plated 23 carat	<b>1210105-00</b> <b>1210145-00</b>
 			












## KLUDI NOVA FONTE

product	product description	surface	art. no.
<b>shower sets</b>			
	 <p><b>KLUDI NOVA FONTE</b> <b>Puristic</b> <b>shower set 1S</b> L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	chrome 	<b>2084005-15</b> <b>NEW</b>
	 <p><b>KLUDI NOVA FONTE</b> <b>Classic</b> <b>shower set 1S</b> L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material</p>	chrome 	<b>2084005-25</b> <b>NEW</b>









## KLUDI NOVA FONTE

product	product description		surface	art. no.
 	<b>KLUDI NOVA FONTE Déco shower set 1S</b> L = 900 mm metal wall rail horizontal and vertical adjustable slider hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material		chrome 	<b>2084005-35</b> <b>NEW</b>
<b>hand shower</b>  	<b>KLUDI NOVA FONTE hand shower 1S DN 15</b> with spray mode: volume quick and easy cleaning system		chrome 	<b>3912005-00</b> <b>NEW</b>
<b>bath sets</b>  	<b>KLUDI NOVA FONTE Puristic bath shower set 1S</b> hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels wall fastening		chrome 	<b>2085005-15</b> <b>NEW</b>










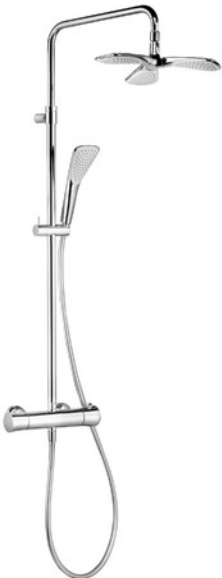





## KLUDI NOVA FONTE

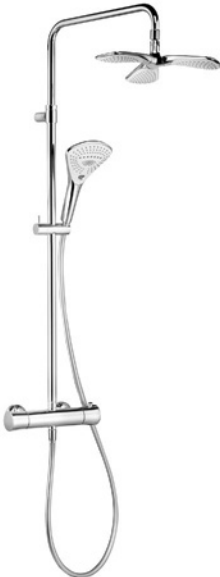product	product description		surface	art. no.
 	<b>KLUDI NOVA FONTE Classic</b> bath shower set 1S hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels wall fastening		chrome 	<b>2085005-25</b> <b>NEW</b>
 	<b>KLUDI NOVA FONTE Déco</b> bath shower set 1S hand shower DN 15 with spray mode: volume flow rate 15 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER-hose anti twist G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels wall fastening		chrome 	<b>2085005-35</b> <b>NEW</b>


















## KLUDI FIZZ

product	product description	surface	art. no.
<b>Shower systems</b>		chrome	<b>6709605-00</b>
	 <p><b>KLUDI FIZZ</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 20 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 flow rate 11,6 l/min (booster) / 11,7 l/min (smooth) / 15,5 l/min (volumen) at 3 bar with draining function with mounting material</p>	    	
	 <p><b>KLUDI FIZZ</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow dirt catcher sieves KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 20 l/min at 3 bar with KLUDI FIZZ handshower 1S 6760005-00 flow rate 15,5 l/min at 3 bar with mounting material</p>	   	


















## KLUDI FIZZ

product	product description	surface	art. no.
	 <p><b>KLUDI FIZZ</b> <b>Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 15 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 8,5 l/min (smooth) / 11 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer</p>	chrome   	<b>6709305-00</b>
	 <p><b>KLUDI FIZZ</b> <b>Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757505-00 flow rate 15 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 8,5 l/min (smooth) / 11 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer</p>	chrome   	<b>6709105-00</b>
<b>head and side showers</b> 	 <p><b>KLUDI FIZZ</b> <b>head shower DN 15</b> diameter 340 mm with three shower cartridge with spray mode: volume flow rate 40 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	<b>6757805-00</b>
















## KLUDI FIZZ

product	product description	surface	art. no.
 	<b>KLUDI FIZZ head shower DN 15</b> diameter 340 mm with two shower cartridges with spray mode: volume flow rate 29 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome 	<b>6757505-00</b>
 	<b>KLUDI FIZZ side shower DN 15</b> wall fastening swivelling normal spray flow rate 4 l/min at 3 bar with wall flange (escutcheon) suitable for water heater with a flow capacity for a minimum of 13 l/min with ball joint	chrome	<b>6708305-00</b>
<b>shower sets</b>			
 	<b>KLUDI FIZZ shower set 3S</b> L = 900 mm wall rail horizontal and vertical adjustable slider KLUDI FIZZ hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 14 l/min (booster) / 11 l/min (smooth) / 16 l/min (volumen) at 3 bar with draining function KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts	chrome white/chrome matt black/ chrome    	<b>6774005-00</b> <b>6774091-00</b> <b>6774087-00</b> <b>NEW</b>
 	<b>KLUDI FIZZ shower set 1S</b> L = 900 mm wall rail horizontal and vertical adjustable slider KLUDI FIZZ hand shower 1S DN 15 with spray mode: volume flow rate 29 l/min at 3 bar KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts	chrome white/chrome matt black/ chrome  	<b>6764005-00</b> <b>6764091-00</b> <b>6764087-00</b> <b>NEW</b>



## KLUDI FIZZ















product	product description		surface	art. no.
hand shower	 	<b>KLUDI FIZZ hand shower 3S DN 15</b> adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 11,5 l/min (smooth) / 19 l/min (volumen) at 3 bar quick and easy cleaning system with draining function connection G 1/2	chrome	<b>6770005-00</b>
			white	<b>6770043-00</b>
			matt black	<b>6770039-00</b>
			  	<b>NEW</b>
hand shower	 	<b>KLUDI FIZZ hand shower 1S DN 15</b> with spray mode: volume flow rate 19,2 l/min at 3 bar quick and easy cleaning system connection G 1/2 PA-IX 7506/IS	chrome	<b>6760005-00</b>
			matt black	<b>6760039-00</b>
				<b>NEW</b>
bath sets	 	<b>KLUDI FIZZ bath-shower set 3S</b> KLUDI FIZZ hand shower 3S DN 15 quick and easy cleaning system adjustable to three spray patterns: booster, smooth, volume flow rate 14 l/min (booster) / 11 l/min (smooth) / 16 l/min (volumen) at 3 bar with draining function connection G 1/2 fixed wall shower hook with screws and dowels KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts with mounting material	chrome	<b>6775005-00</b>
			white/chrome	<b>6775091-00</b>
			matt black/ chrome	<b>6775087-00</b>
			  	<b>NEW</b>

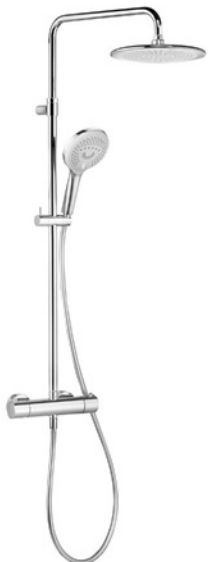

## Showers













## KLUDI FRESHLINE

product	product description	surface	art. no.
<b>Shower systems</b>			
 	<b>KLUDI FRESHLINE Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6751105-00 flow rate 16,4 l/min at 3 bar with KLUDI FRESHLINE handshower RL 3S 6790005-00 flow rate 13,6 l/min (booster) / 10,9 l/min (smooth) / 17,1 l/min (volumen) at 3 bar with draining function with mounting material	chrome    	<b>6709205-00</b>
 	<b>KLUDI FRESHLINE Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube two-way ceramic diverter horizontal and vertical adjustable slider water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6751105-00 flow rate 14 l/min at 3 bar with KLUDI FRESHLINE handshower RL 3S 6790005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 9 l/min (smooth) / 12 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer	chrome   	<b>6709005-00</b>
<b>head showers</b>			
 	<b>KLUDI FRESHLINE head shower DN 15</b> 400 x 260 mm with spray mode: volume flow rate 34 l/min at 3 bar quick and easy cleaning system pre-installed dirt cleaner sieve without shower arm connection G 1/2	chrome 	<b>6440005-00</b>









KLUDI FRESHLINE

product	product description	surface	art. no.
 	<b>KLUDI FRESHLINE head shower DN 15</b> 300 x 220 mm with spray mode: volume flow rate 34 l/min at 3 bar quick and easy cleaning system pre-installed dirt cleaner sieve without shower arm connection G 1/2	chrome 	<b>6445005-00</b> <b>NEW</b>
 	<b>KLUDI FRESHLINE head shower DN 15</b> Ø 250 mm flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint without shower arm connection G 1/2	chrome 	<b>6751105-00</b>
 	<b>KLUDI FRESHLINE shower set 3S</b> L = 900 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 10 l/min (smooth) / 18,8 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI SUPARAFLEX SILVER/WHITE hose plastic-coated with conical nuts with dirt catcher sieves with mounting material G 1/2 x G 1/2 x 1600 mm	chrome white/chrome  	<b>6794005-00</b> <b>6794091-00</b>
















## KLUDI FRESHLINE

product	product description	surface	art. no.
 	<b>KLUDI FRESHLINE shower set 3S</b> L = 600 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 10 l/min (smooth) / 18,8 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material	chrome 	<b>6793005-00</b>
 	<b>KLUDI FRESHLINE shower set 1S</b> L = 900 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER/WHITE hose plastic-coated with conical nuts with dirt catcher sieves with mounting material G 1/2 x G 1/2 x 1600 mm	chrome white/chrome 	<b>6784005-00</b> <b>6784091-00</b>


















KLUDI FRESHLINE

product	product description		surface	art. no.
 	<b>KLUDI FRESHLINE shower set 1S</b> L = 600 mm horizontal and vertical adjustable slider KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm plastic-coated with conical nuts with dirt catcher sieves with mounting material		chrome 	<b>6783005-00</b>
<b>hand shower</b>  	<b>KLUDI FRESHLINE hand shower CL 1S</b> with spray mode: volume flow rate 22 l/min at 3 bar quick and easy cleaning system connection G 1/2		chrome 	<b>6450005-00</b>
 	<b>KLUDI FRESHLINE hand shower RS 1S</b> with spray mode: volume flow rate 29 l/min at 3 bar quick and easy cleaning system connection G 1/2		chrome white 	<b>6780005-00</b> <b>6780043-00</b>
 	<b>KLUDI FRESHLINE hand shower RL 3S</b> adjustable to three spray patterns: booster, smooth, volume flow rate 19 l/min (booster) / 11 l/min (smooth) / 26 l/min (volumen) at 3 bar quick and easy cleaning system with draining function connection G 1/2		chrome white  	<b>6790005-00</b> <b>6790043-00</b>












## KLUDI FRESHLINE

product		product description	surface	art. no.
<b>bath sets</b>				
		<b>KLUDI FRESHLINE bath-shower set 3S</b> wall fastening KLUDI FRESHLINE handshower RL 3S adjustable to three spray patterns: booster, smooth, volume flow rate 15 l/min (booster) / 10 l/min (smooth) / 18,8 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1250 mm plastic-coated, with metal-effect with conical nuts with screws and dowels	chrome white/chrome   	<b>6795005-00</b> <b>6795091-00</b>
		<b>KLUDI FRESHLINE bath shower set 1S</b> wall fastening KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts with screws and dowels	chrome white/chrome 	<b>6785005-00</b> <b>6785091-00</b>
		<b>KLUDI FRESHLINE bath shower set 1S</b> KLUDI FRESHLINE handshower RS 1S with spray mode: volume flow rate 19 l/min at 3 bar KLUDI SUPARAFLEX SILVER/WHITE hose G 1/2 x G 1/2 x 1250 mm with conical nuts wall supply with shower holder DN 15 protected against back flow in compliance with DIN EN 1717 with screws and dowels shower outlet G 1/2 with conical nuts noise level I	chrome white/chrome 	<b>6787005-00</b> <b>6787091-00</b>
<b>Accessories</b>				
		<b>KLUDI FRESHLINE shower hook</b> for hoses with conical nut with screws and dowels	chrome	<b>6455205-00</b>















## KLUDI A-QA

product	product description	surface	art. no.
<b>Shower systems</b>			
	 <p><b>KLUDI A-QA Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 KLUDI A-QA handshower rotate the handle to the rear shower outlet KLUDI A-QA head shower rotary valve protected against back flow dirt catcher sieves KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower 4940205-00 flow rate 23 l/min at 3 bar with KLUDI A-QA hand shower 3910005-00 with spray mode: volume flow rate 16 l/min at 3 bar with mounting material</p>	chrome   	<b>4909505-00</b>
	 <p><b>KLUDI A-QA Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower 4940205-00 flow rate 23 l/min at 3 bar with KLUDI A-QA hand shower 3910005-00 with spray mode: volume flow rate 16 l/min at 3 bar with mounting material</p>	chrome  	<b>4919105-00</b>



## KLUDI A-QA

product	product description	surface	art. no.
	 <p><b>KLUDI A-QA s</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube protected against back flow temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet Head shower rotary valve dirt catcher sieves head shower Ø 200 mm flow rate 16,3 l/min at 3 bar hand shower KLUDI A-QA s adjustable to three spray patterns: booster, smooth, volume flow rate 11.6 l/min (booster) / 11.7 l/min (smooth) / 15.5 l/min (volumen) at 3 bar with mounting material</p>	chrome    	<b>6609505-00</b>
	 <p><b>KLUDI A-QA s</b> <b>Thermostat Dual Shower System DN 15</b> with horizontally and vertically adjustable tube wall fastening metal head shower temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 KLUDI A-QA handshower rotate the handle to the rear shower outlet G 3/4 KLUDI A-QA head shower rotary valve protected against back flow horizontal and vertical adjustable slider KLUDI SUPARAFLEX Hose DN 15 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 250 mm, swiveling flow rate 16,3 l/min at 3 bar with KLUDI A-QA s handshower DN 15 with three spray patterns flow rate 11.6 l/min (booster) / 11.7 l/min (smooth) / 15.5 l/min (volumen) at 3 bar with mounting material dirt catcher sieves</p>	chrome    	<b>6619505-00</b>




## KLUDI A-QA

### product

### product description

### surface


### art. no.



**KLUDI A-QA s  
Dual Shower System DN 15**  
wall fastening  
with horizontally and vertically adjustable tube  
horizontal and vertical adjustable slider  
two-way ceramic diverter  
water supply with  
connecting hose G 1/2 x G 1/2 x 800 mm  
KLUDI SUPARAFLEX Hose DN 15  
G 1/2 x G 1/2 x 1600 mm  
head shower Ø 200 mm  
flow rate 14,8 l/min at 3 bar  
hand shower KLUDI A-QA s  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) /  
12,9 l/min (volumen) at 3 bar  
with mounting material  
without shower mixer

chrome


**6609105-00**



**KLUDI A-QA s  
Dual Shower System DN 15**  
with horizontally and vertically adjustable tube  
metal head shower  
two-way ceramic diverter  
water supply with  
with flexible hose  
horizontal and vertical adjustable slider  
KLUDI SUPARAFLEX Hose DN 15  
G 1/2 x G 1/2 x 1600 mm  
with KLUDI A-QA headshower Ø 250 mm, swiveling  
flow rate 14,8 l/min at 3 bar  
KLUDI A-QA s hand shower DN 15  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) /  
12,9 l/min (volumen) at 3 bar  
with mounting material  
wall fastening  
without shower mixer

chrome

**6619205-00**



**KLUDI A-QA  
Thermostat Mono Shower System DN 15**  
wall fastening  
with horizontally and vertically adjustable tube  
temperature control handle 38° C  
with hot water safety device 38° C  
ceramic shut-off valve 180°  
50 % water consumption regulation  
head shower Ø 200 mm 6651005-00  
flow rate 22 l/min at 3 bar  
s-connections  
with mounting material  
dirt catcher sieves
















chrome

**6608105-00**




















## KLUDI A-QA

product	product description	surface	art. no.
head and side showers	<b>KLUDI A-QA head shower DN 15</b> metal head shower wall fastening headshower Ø 250 mm with spray mode: volume quick and easy cleaning system flow rate 24,5 l/min at 3 bar	chrome 	<b>6487005-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> metal head shower wall fastening headshower Ø 250 mm with spray mode: volume with flood spray quick and easy cleaning system flow rate volume spray: 24,5 l/min at 3 bar flow rate flood spray: 27 l/min at 3 bar Control of 2 spray types via 2 valves or one changeover valve with 2 outlets	chrome white/chrome matt black/ chrome 	<b>6488005-00</b> <b>6488091-00</b> <b>6488087-00</b> <b>NEW</b>
 	<b>KLUDI A-QA head shower DN 15</b> Ø 200 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome 	<b>6432005-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> Ø 250 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome matt black/ chrome 	<b>6432505-00</b> <b>6432591-00</b> <b>6432587-00</b> <b>NEW</b>
 	<b>KLUDI A-QA head shower DN 15</b> Ø 300 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome matt black/ chrome 	<b>6433005-00</b> <b>6433091-00</b> <b>6433087-00</b> <b>NEW</b>
 			

















## KLUDI A-QA

product	product description	surface	art. no.
 	<b>KLUDI A-QA head shower DN 15</b> Ø 400 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome matt black/ chrome 	<b>6434005-00</b> <b>6434091-00</b> <b>6434087-00</b> <b>NEW</b>
 	<b>KLUDI A-QA head shower DN 15</b> 200 x 200 mm metal head shower with spray mode: volume flow rate 11 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome 	<b>6442005-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 250 x 250 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome 	<b>6442505-00</b> <b>6442591-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 300 x 300 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome 	<b>6443005-00</b> <b>6443091-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 400 x 400 mm metal head shower with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm	chrome white/chrome 	<b>6444005-00</b> <b>6444091-00</b>



















## KLUDI A-QA

product	product description	surface	art. no.
	 <p><b>KLUDI A-QA head shower DN 15</b> 200 x 200 mm Soft-edge metal head shower with spray mode: volume flow rate 19 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome 	<b>6452005-00</b>
	 <p><b>KLUDI A-QA head shower DN 15</b> 300 x 300 mm Soft-edge metal head shower with spray mode: volume flow rate 14 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm</p>	chrome white/chrome 	<b>6453005-00</b> <b>6453091-00</b>
	 <p><b>KLUDI A-QA head shower DN 15</b> Ø 245 mm with spray mode: volume flow rate 38,4 l/min at 3 bar quick and easy cleaning system without shower arm noise level I</p>	chrome 	<b>6651105-00</b>
	 <p><b>KLUDI A-QA eco-head shower DN 15</b> Ø 245 mm with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I</p>	chrome  	<b>6652105-00</b>
	 <p><b>KLUDI A-QA head shower DN 15</b> Ø 200 mm with spray mode: volume flow rate 37 l/min at 3 bar quick and easy cleaning system with ball joint connection G 1/2 without shower arm noise level I</p>	chrome 	<b>6651005-00</b>





















## KLUDI A-QA

product	product description	surface	art. no.
 	<b>KLUDI A-QA head shower DN 15</b> 140 x 245 mm quick and easy cleaning system with ball joint flow rate 22,5 l/min at 3 bar pre-installed dirt cleaner sieve connection G 1/2 without shower arm	chrome 	<b>4940205-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 250 x 250 mm with spray mode: volume flow rate 25,8 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	<b>6653105-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 250 x 250 mm with spray mode: volume flow rate 9 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome  	<b>6654105-00</b>
 	<b>KLUDI A-QA head shower DN 15</b> 200 x 200 mm with spray mode: volume flow rate 25,8 l/min at 3 bar quick and easy cleaning system connection G 1/2 without shower arm noise level I	chrome 	<b>6653005-00</b>
 	<b>KLUDI A-QA head shower 3S DN 15</b> adjustable to three spray patterns: booster, smooth, volume flow rate 8 l/min (booster) / 18 l/min (smooth) / 18,5 l/min (volumen) at 3 bar quick and easy cleaning system suitable for water heater with a flow capacity for a minimum of 13 l/min without shower arm with ball joint	chrome 	<b>6239105-00</b>




















## KLUDI A-QA

product		product description	surface	art. no.
		<b>KLUDI A-QA head shower DN 15</b> quick and easy cleaning system with one spray mode: rainshower flow rate 18 l/min at 3 bar suitable for water heater with a flow capacity for a minimum of 13 l/min without shower arm with ball joint	chrome 	<b>6219105-00</b>
		<b>KLUDI A-QA side shower DN 15</b> swivelling normal spray flow rate 4 l/min at 3 bar with ball joint with wall flange (escutcheon)	chrome	<b>6108305-00</b>
<b>shower sets</b>				
		<b>KLUDI A-QA i shower set 1S</b> L = 900 mm wall rail right and left swiveling horizontal and vertical adjustable slider KLUDI A-QA i 1S hand shower DN 15 flow rate 18,5 l/min at 3 bar Supraflex shower hose anti twist G 1/2 x G 1/2 x 1600 mm with conical nuts noise level I P-IX 19052/IB	chrome 	<b>6614005-00</b>
		<b>KLUDI A-QA s shower set 3S</b> L = 900 mm wall rail KLUDI A-QA s hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 16 l/min (booster) / 15 l/min (smooth) / 22 l/min (volumen) at 3 bar SIRENAFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts	chrome  	<b>6574005-00</b>
		<b>KLUDI A-QA s shower set 3S</b> L = 600 mm wall rail KLUDI A-QA s hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 16 l/min (booster) / 15 l/min (smooth) / 22 l/min (volumen) at 3 bar SIRENAFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts	chrome  	<b>6573005-00</b>





## KLUDI A-QA

product	product description		surface	art. no.
		<b>KLUDI A-QA b shower set 1S</b> L = 600 mm wall rail horizontal and vertical adjustable slider KLUDI A-QA b hand shower 1S DN 15 with 50 % Eco function flow rate 18 l/min at 3 bar flow rate 90 l/min at 3 bar eco SIRENAFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts noise level I	chrome  	<b>6563005-00</b>
<b>wall rails</b> 		<b>KLUDI A-QA v flexible wall rail</b> L = 1100 mm bracket adjustment to existing drill holes up to 1020 mm horizontal and vertical adjustable slider Supraflex shower hose anti twist G 1/2 x G 1/2 x 1600 mm with conical nuts	chrome	<b>6209505-00</b>
		<b>KLUDI A-QA wall rail</b> L = 955 mm metal wall rail horizontal and vertical adjustable slider with screws and dowels	chrome	<b>6564105-00</b>
<b>bath sets</b> 		<b>KLUDI A-QA s bath-shower set</b> KLUDI A-QA s hand shower 3S DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 15,1 l/min (booster) / 16,3 l/min (smooth) / 22,5 l/min (volumen) at 3 bar SIRENAFLEX-hose G 1/2 x G 1/2 x 1250 mm fixed wall shower hook with screws and dowels with conical nuts	chrome   	<b>6575005-00</b>
		<b>KLUDI A-QA b bath-shower set</b> KLUDI A-QA b hand shower 1S DN 15 with 50 % Eco function with shower spray with 60 flash nozzels flow rate 18 l/min at 3 bar flow rate 90 l/min at 3 bar eco SIRENAFLEX-hose G 1/2 x G 1/2 x 1250 mm fixed wall shower hook with conical nuts with screws and dowels noise level I	chrome  	<b>6565005-00</b>

















## KLUDI A-QA

product		product description	surface	Art.-Nr.
 		<b>KLUDI A-QA b bath-shower set</b> KLUDI A-QA b hand shower 1S DN 15 with 50 % Eco function with shower spray with 60 flash nozzels flow rate 18 l/min at 3 bar flow rate 9.0 l/min at 3 bar eco KLUDI SUPARAFLEX SILVER hose 6107105-00 G 1/2 x G 1/2 x 1250 mm wall supply with shower holder DN 15 protected against back flow in compliance with DIN EN 1717 with conical nuts with screws and dowels shower outlet G 1/2 noise level I	chrome  	<b>6567005-00</b>
<b>hand shower</b>  		<b>KLUDI A-QA hand shower DN 15</b> with spray mode: volume quick and easy cleaning system flow rate 16 l/min at 3 bar	chrome 	<b>3910005-00</b>
 		<b>KLUDI A-QA s hand shower DN 15</b> quick and easy cleaning system adjustable to three spray patterns: booster, smooth, volume flow rate 16,5 l/min (booster) / 15 l/min (smooth) / 24,5 l/min (volumen) at 3 bar noise level I	chrome   	<b>6570005-00</b>
 		<b>KLUDI A-QA b hand shower 1S DN 15</b> with shower spray with 60 flash nozzels with 50 % Eco function flow rate 18 l/min at 3 bar flow rate 9.0 l/min at 3 bar eco quick and easy cleaning system connection G 1/2 eco function not applicable for hydraulic DEH according to DIN EN 1112 noise level I	chrome  	<b>6560005-00</b>







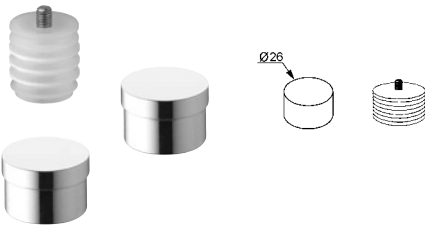


## KLUDI A-QA

product		product description	surface	Art.-Nr.
Accessories				
		<b>KLUDI A-QA wall supply with shower holder DN 15</b> for hoses with conical nut shower outlet G 1/2 protected against back flow according to DIN EN 1717 with wall-compensation ring with mounting material	chrome	<b>6556005-00</b>
		<b>KLUDI A-QA wall supply with shower holder DN 15</b> with flow control wall fastening for hoses with conical nut shower outlet G 1/2 continuously regulable ceramic flow regulator from 3 l/min to 20 l/min approx. protected against back flow in compliance with DIN EN 1717 with wall-compensation ring with mounting material not lockable	chrome 	<b>6556105-00</b>
		<b>KLUDI A-QA wall supply with shower holder DN 15</b> with ceramic shut-off valve wall fastening for hoses with conical nut shower outlet G 1/2 protected against back flow in compliance with DIN EN 1717 with wall-compensation ring with mounting material	chrome 	<b>6556205-00</b>
		<b>KLUDI A-QA wall supply DN 15</b> with flow control wall fastening shower outlet G 1/2 continuously regulable ceramic flow regulator from 3 l/min to 20 l/min approx. protected against back flow in compliance with DIN EN 1717 with wall-compensation ring with mounting material not lockable	chrome 	<b>6554405-00</b>
		<b>KLUDI A-QA wall supply DN 15</b> with ceramic shut-off valve wall fastening shower outlet G 1/2 protected against back flow with wall-compensation ring with mounting material	chrome 	<b>6554505-00</b>











## KLUDI A-QA

product		product description	surface	art. no.
		<b>KLUDI A-QA i</b> <b>tile compensation washer</b> for wall rail	chrome	<b>93098905-00</b>
		<b>KLUDI A-QA s</b> <b>tile compensation washer</b> for wall rail	chrome	<b>93099005-00</b>
		<b>KLUDI A-QA v</b> <b>extension set</b> for wall rail 62095.. for shower sets 62096 .., 62097 .., 68096 .. and 68097 ..	chrome	<b>7042005-00</b>
		<b>KLUDI A-QA v</b> <b>shortening set</b> for wall rail 62095.. for shower sets 62096 .., 62097 .., 68096 .. and 68097 ..	chrome	<b>7043005-00</b>
















## KLUDI ZENTA

product	product description	surface	art. no.
<b>Shower systems</b>		chrome	<b>6609005-00</b>
	 <p><b>KLUDI ZENTA Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX Hose DN 15 G 1/2 x G 1/2 x 1600 mm head shower Ø 200 mm flow 13 l/min at 3 bar hand shower KLUDI ZENTA 2S flow rate 11 l/min at 3 bar with mounting material without shower mixer</p>	 	
	 <p><b>KLUDI ZENTA SHOWER DUO thermostatic shower mixer DN 15</b> wall rail with glider L = 900 mm wall fastening temperature control handle with hot water safety device 38° C protected against back flow with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm KLUDI ZENTA 2S hand shower DN 15 adjustable to two spray patterns: smooth, volume flow rate 15,5 l/min (smooth) / 18 l/min (volumen) at 3 bar PA-IX 18064/IB</p>	chrome  	<b>6057705-00</b>














## KLUDI ZENTA

product	product description	surface	art. no.
	 <p><b>KLUDI ZENTA SHOWER DUO</b> <b>thermostatic shower mixer DN 15</b> wall rail with glider L = 600 mm wall fastening temperature control handle with hot water safety device 38° C protected against back flow with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm KLUDI ZENTA 2S hand shower DN 15 adjustable to two spray patterns: smooth, volume flow rate 15,5 l/min (smooth) / 18 l/min (volumen) at 3 bar PA-IX 18064/IB</p>	chrome  	<b>6057605-00</b>
<b>shower sets</b> 	 <p><b>KLUDI ZENTA</b> <b>shower set 3S</b> L = 900 mm KLUDI ZENTA slider rail in white KLUDI ZENTA 3S hand shower DN 15 white/chrome adjustable to three spray patterns: booster, smooth, volume KLUDI SUPARAFLEX WHITE shower hose DN 15 G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	white/chrome 	<b>6085091-00</b>
	 <p><b>KLUDI ZENTA</b> <b>shower set 3S</b> L = 900 mm KLUDI ZENTA wall rail KLUDI ZENTA 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 12,5 l/min (booster) / 16 l/min (smooth) / 18 l/min (volumen) at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome white/chrome black/chrome 	<b>6084005-00</b> <b>6084091-00</b> <b>6084086-00</b>
	 <p><b>KLUDI ZENTA</b> <b>shower set 3S</b> L = 600 mm KLUDI ZENTA wall rail KLUDI ZENTA 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 12,5 l/min (booster) / 16 l/min (smooth) / 18 l/min (volumen) at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome 	<b>6083005-00</b>





## KLUDI ZENTA

product	product description	surface	art. no.
	 <p><b>KLUDI ZENTA shower set 2S</b> L = 900 mm KLUDI ZENTA wall rail KLUDI ZENTA 2S hand shower DN 15 adjustable to two spray patterns: smooth, volume flow rate 15,5 l/min (smooth) / 18 l/min (volumen) at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome 	<b>6074005-00</b>
	 <p><b>KLUDI ZENTA shower set 2S</b> L = 600 mm KLUDI ZENTA wall rail KLUDI ZENTA 2S hand shower DN 15 adjustable to two spray patterns: smooth, volume flow rate 15,5 l/min (smooth) / 18 l/min (volumen) at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome 	<b>6073005-00</b>
	 <p><b>KLUDI ZENTA shower set 1S</b> L = 900 mm KLUDI ZENTA wall rail with KLUDI ZENTA hand shower 1S DN 15 with spray mode: volume flow rate 18 l/min at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome	<b>6064005-00</b>
	 <p><b>KLUDI ZENTA shower set 1S</b> L = 600 mm KLUDI ZENTA wall rail with KLUDI ZENTA hand shower 1S DN 15 with spray mode: volume flow rate 18 l/min at 3 bar with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome	<b>6063005-00</b>
<b>wall rails</b>	 <p><b>KLUDI ZENTA wall rail</b> L = 600 mm horizontal and vertical adjustable slider with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome	<b>6061005-00</b>



## KLUDI ZENTA












product	product description	surface	art. no.
hand shower	<b>KLUDI ZENTA hand shower 3S DN 15</b> quick and easy cleaning system adjustable to three spray patterns: booster, smooth, volume flow rate 12,5 l/min (booster) / 16 l/min (smooth) / 17,5 l/min (volumen) at 3 bar	chrome 	<b>6080005-00</b>
	 <b>KLUDI ZENTA hand shower 2S DN 15</b> quick and easy cleaning system adjustable to two spray patterns: smooth, volume flow rate 15,5 l/min (smooth) / 18 l/min (volumen) at 3 bar	chrome 	<b>6070005-00</b>
	 <b>KLUDI ZENTA hand shower 1S DN 15</b> quick and easy cleaning system with spray mode: volume flow rate 18 l/min at 3 bar	chrome	<b>6060005-00</b>



## Showers



## KLUDI LOGO

product	product description	surface	art. no.
<b>Shower systems</b>		chrome	<b>6809205-00</b>
	 <p><b>KLUDI LOGO</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve dirt catcher sieves protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 16 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 13,5 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar with draining function with mounting material</p>	   	
	 <p><b>KLUDI LOGO</b> <b>Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow 13 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 12,9 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer</p>	  	<b>6809105-00</b>




## KLUDI LOGO

### product

### product description

### surface

### art. no.




**KLUDI LOGO**  
**Thermostat Dual Shower System DN 15**  
with horizontally and vertically adjustable tube  
horizontal and vertical adjustable slider  
wall fastening  
temperature control handle  
with hot water safety device 38° C  
with ceramic shut-off valve as rotary valve 90°/90°  
shower outlet G 1/2  
hand shower rotary valve  
shower outlet  
head shower rotary valve  
dirt catcher sieves  
protected against back flow  
KLUDI SUPARAFLEX SILVER hose 6107205-00  
G 1/2 x G 1/2 x 1600 mm  
with KLUDI A-QA headshower Ø 200 mm  
flow rate 16 l/min at 3 bar  
with KLUDI LOGO 1S hand shower DN 15 6810005-00  
flow rate 21 l/min at 3 bar  
with mounting material

chrome

**6809505-00**



Showers



**KLUDI LOGO**  
**Thermostat Dual Shower System DN 15**  
horizontal and vertical adjustable slider  
wall fastening  
temperature control handle  
with hot water safety device 38° C  
with ceramic shut-off valve as rotary valve 90°/90°  
shower outlet G 1/2  
hand shower rotary valve  
shower outlet  
head shower rotary valve to the rear  
dirt catcher sieves  
protected against back flow  
KLUDI SUPARAFLEX SILVER hose 6107205-00  
G 1/2 x G 1/2 x 1600 mm  
with KLUDI A-QA headshower Ø 200 mm  
flow rate 16 l/min at 3 bar  
with KLUDI LOGO 1S hand shower DN 15 6810005-00  
flow rate 21 l/min at 3 bar  
with mounting material

chrome










**6809405-00**

**NEW**





## KLUDI LOGO

product	product description	surface	art. no.
	 <p><b>KLUDI LOGO Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow 13 l/min at 3 bar with KLUDI LOGO 1S hand shower DN 15 6810005-00 flow rate 16 l/min at 3 bar with mounting material without shower mixer</p>	chrome  	<b>6809305-00</b>
	 <p><b>KLUDI LOGO single lever mixer Dual Shower System DN 15</b> solid lever wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider ceramic cartridge with hot water limitation shower outlet G 1/2 90° adjustable rotary valve for the control of head and hand shower shower outlet protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 18 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 17 l/min (volumen) at 3 bar with draining function with mounting material</p>	chrome   	<b>6808505-00</b>




## KLUDI LOGO

### product

### product description

### surface

### art. no.




**KLUDI LOGO**  
**single lever mixer Dual Shower System DN 15**  
with bath filler  
solid lever  
wall fastening  
with horizontally and vertically adjustable tube  
horizontal and vertical adjustable slider  
ceramic cartridge with hot water limitation  
shower outlet G 1/2  
120° adjustable rotary valve  
for the control of head-, hand shower and bath filler  
shower outlet  
protected against back flow  
KLUDI SUPARAFLEX SILVER hose 6107205-00  
G 1/2 x G 1/2 x 1600 mm  
with KLUDI A-QA headshower Ø 200 mm  
flow rate 21 l/min at 3 bar  
with KLUDI LOGO hand shower 3S 6830005-00  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) /  
17 l/min (volumen) at 3 bar  
with draining function  
with mounting material

chrome

**6808305-00**



Showers



**KLUDI LOGO SHOWER DUO**  
**thermostatic shower mixer DN 15**  
wall fastening  
flow class B  
temperature control handle  
with hot water safety device 38° C  
with shut-off valve  
50 % water consumption regulation  
protected against back flow  
dirt catcher sieves  
shower outlet G 1/2  
P-IX 8049/IB  
DIN-DVGW-BM-0037  
flexible wall rail with slider  
L = 1100 mm  
bracket adjustment to existing drill holes up to 1020 mm  
with KLUDI LOGO hand shower 3S 6830005-00  
adjustable to three spray patterns:  
booster, smooth, volume  
with draining function  
KLUDI SUPARAFLEX SILVER hose 6106205-00  
G 1/2 x G 1/2 x 1600 mm













chrome

**6809705-00**





## KLUDI LOGO

product	product description	surface	art. no.
 	<b>KLUDI LOGO SHOWER DUO</b> <b>L = 900 mm</b> KLUDI LOGO wall rail Ø 18 mm thermostatic shower mixer DN 15 wall fastening with shut-off valve temperature control handle with hot water safety device 38° C protected against back flow dirt catcher sieves shower outlet G 1/2 with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume with draining function with KLUDI LOGOFLEX-hose 6105605-00 G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect	chrome    	<b>6857705-00</b>
 	<b>KLUDI LOGO SHOWER DUO</b> <b>L = 600 mm</b> KLUDI LOGO wall rail Ø 18 mm thermostatic shower mixer DN 15 wall fastening with shut-off valve temperature control handle with hot water safety device 38° C protected against back flow dirt catcher sieves shower outlet G 1/2 PA-IX 18064/IB with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume with draining function with KLUDI LOGOFLEX-hose 6105605-00 G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect	chrome    	<b>6857605-00</b>






## KLUDI LOGO

### product

### product description

### surface

### art. no.



#### KLUDI LOGO SHOWER DUO

##### L = 900 mm


KLUDI LOGO wall rail Ø 18 mm  
KLUDI BASIC thermostatic shower mixer DN 15  
wall fastening  
with shut-off valve  
temperature control handle  
with hot water safety device 38° C  
protected against back flow  
dirt catcher sieves  
shower outlet G 1/2  
with KLUDI LOGO 1S hand shower DN 15  
6810005-00  
with spray mode: volume  
with KLUDI LOGOFLEX-hose 6105605-00  
G 1/2 x G 1/2 x 1600 mm  
plastic-coated  
with metal-effect

chrome

6857805-00



NEW



#### KLUDI LOGO SHOWER DUO

##### L = 600 mm

KLUDI LOGO wall rail Ø 18 mm  
KLUDI BASIC thermostatic shower mixer DN 15  
wall fastening  
with shut-off valve  
temperature control handle  
with hot water safety device 38° C  
protected against back flow  
dirt catcher sieves  
shower outlet G 1/2  
with KLUDI LOGO 1S hand shower DN 15  
6810005-00  
with spray mode: volume  
with KLUDI LOGOFLEX-hose 6105605-00  
G 1/2 x G 1/2 x 1600 mm  
plastic-coated  
with metal-effect

chrome

6857505-00



NEW

### hand shower


### KLUDI LOGO

#### hand shower 3S DN 15

adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 13 l/min (booster) / 10 l/min (smooth) /  
15 l/min (volumen) at 3 bar  
quick and easy cleaning system  
with draining function  
connection G 1/2












chrome

6830005-00





## KLUDI LOGO

product	product description	surface	art. no.
 	<b>KLUDI LOGO hand shower 1S DN 15</b> with spray mode: volume flow rate 41 l/min at 3 bar quick and easy cleaning system connection G 1/2	chrome 	<b>6810005-00</b>
 	<b>KLUDI LOGO shower set 3S</b> L = 900 mm KLUDI LOGO wall rail Ø 18 mm KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts	chrome  	<b>6839005-00</b>
 	<b>KLUDI LOGO shower set 3S</b> L = 900 mm wall rail Ø 23 mm KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts	chrome  	<b>6839305-00</b>




## KLUDI LOGO

### product

### product description

### surface

### art. no.

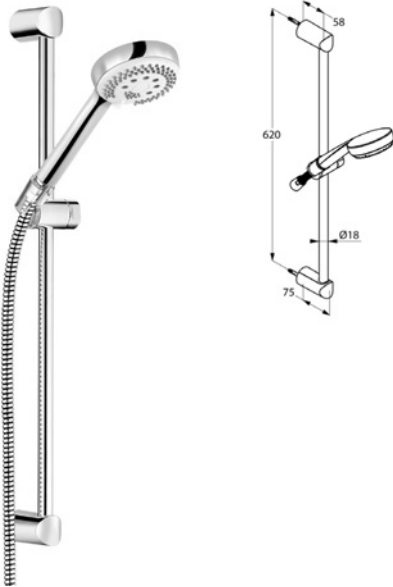


#### KLUDI LOGO shower set 3S

L = 600 mm  
KLUDI LOGO wall rail Ø 18 mm  
KLUDI LOGO 3S hand shower DN 15  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 13 l/min (booster) / 10 l/min (smooth) /  
15 l/min (volumen) at 3 bar  
quick and easy cleaning system  
with draining function  
KLUDI LOGOFLEX  
shower hose  
G 1/2 x G 1/2 x 1600 mm  
plastic-coated  
with metal-effect  
with conical nuts

chrome

6836005-00

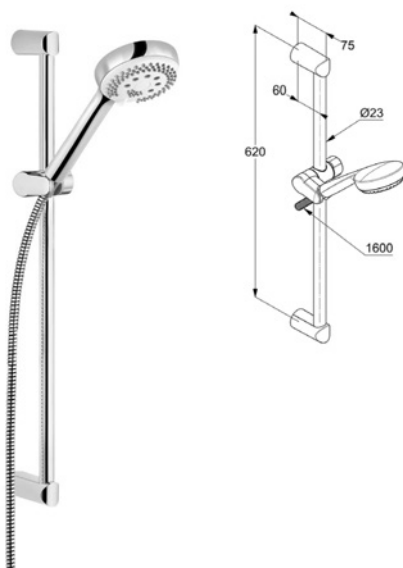


#### KLUDI LOGO shower set 3S

L = 600 mm  
wall rail Ø 23 mm  
KLUDI LOGO 3S hand shower DN 15  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 13 l/min (booster) / 10 l/min (smooth) /  
15 l/min (volumen) at 3 bar  
quick and easy cleaning system  
with draining function  
KLUDI LOGOFLEX  
shower hose  
G 1/2 x G 1/2 x 1600 mm  
plastic-coated  
with metal-effect  
with conical nuts

chrome

6836305-00



#### KLUDI LOGO shower set 3S

L = 1100 mm  
flexible wall rail with slider  
bracket adjustment to existing drill holes up to 1020 mm  
KLUDI LOGO 3S hand shower DN 15  
adjustable to three spray patterns:  
booster, smooth, volume  
flow rate 13 l/min (booster) / 10 l/min (smooth) /  
15 l/min (volumen) at 3 bar  
Supraflex shower hose anti twist  
G 1/2 x G 1/2 x 1600 mm  
with conical nuts










chrome

6809605-00

















## KLUDI LOGO

product	product description	surface	art. no.
 	<b>KLUDI LOGO shower set 1S</b> L = 900 mm KLUDI LOGO wall rail Ø 18 mm with KLUDI LOGO 1S hand shower DN 15 6810005-00 with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts	chrome 	<b>6819005-00</b>
 	<b>KLUDI LOGO shower set 1S</b> L = 600 mm KLUDI LOGO wall rail Ø 18 mm with KLUDI LOGO 1S hand shower DN 15 6810005-00 with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts	chrome 	<b>6816005-00</b>
 	<b>KLUDI LOGO shower set 1S</b> L = 955 mm metal wall rail Ø 21 mm horizontal and vertical adjustable slider with KLUDI LOGO 1S hand shower DN 15 6810005-00 flow rate 14 l/min at 3 bar Supraflex shower hose anti twist G 1/2 x G 1/2 x 1600 mm with conical nuts	chrome 	<b>6864205-00</b>



## KLUDI LOGO

product		product description	surface	art. no.
wall rails		 <p><b>KLUDI LOGO wall rail</b> L = 900 mm horizontal and vertical adjustable slider with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts</p>	chrome	<b>6809005-00</b>
		 <p><b>KLUDI LOGO wall rail</b> L = 600 mm horizontal and vertical adjustable slider with KLUDI LOGOFLEX-hose G 1/2 x G 1/2 x 1600 mm plastic-coated with metal-effect with conical nuts</p>	chrome	<b>6806005-00</b>
bath sets		 <p><b>KLUDI LOGO bath-shower set 3S</b> KLUDI LOGO 3S hand shower DN 15 adjustable to three spray patterns: booster, smooth, volume flow rate 13 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar quick and easy cleaning system with draining function KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels</p>	chrome   	<b>6803005-00</b>
		 <p><b>KLUDI LOGO bath shower set 1S</b> KLUDI LOGO 1S hand shower DN 15 with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI LOGOFLEX shower hose G 1/2 x G 1/2 x 1250 mm plastic-coated with conical nuts fixed wall shower hook with screws and dowels</p>	chrome 	<b>6801005-00</b>




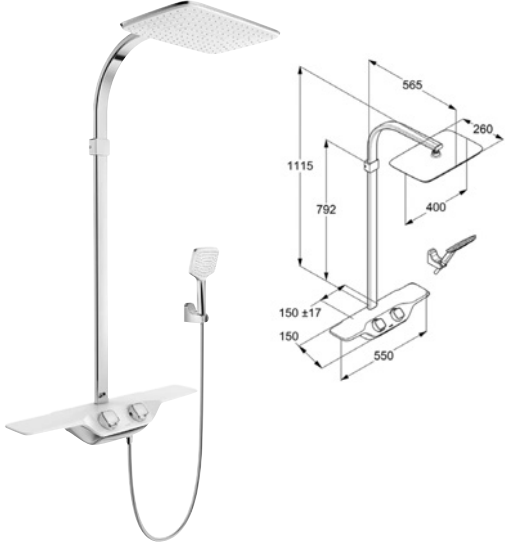












## KLUDI LOGO

product	product description	surface	art. no.
	 <p><b>KLUDI LOGO bath shower set 1S</b> KLUDI LOGO 1S hand shower DN 15 with spray mode: volume flow rate 23 l/min at 3 bar quick and easy cleaning system KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1250 mm with conical nuts wall supply with shower holder DN 15 protected against back flow according to DIN EN 1717 with screws and dowels shower outlet G 1/2</p>	chrome 	<b>6867005-00</b>













## KLUDI COCKPIT

product	product description	surface	art. no.
<b>Shower systems</b>	<b>KLUDI COCKPIT Discovery</b> <b>Thermostat Dual Shower System DN 15</b> shelf 550 mm wall fastening KLUDI FRESHLINE shower hook 6455205-00, in the angle of inclination slider (75°) temperature control handle with hot water safety device 40 °C with ceramic shut-off valve shower outlet G 1/2 hand shower rotary valve left shower outlet head shower rotary valve right protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6440005-00 flow rate 17 l/min at 3 bar with KLUDI FRESHLINE handshower CL 1S 6450005-00 flow rate 14 l/min at 3 bar with mounting material	white/chrome   	<b>8020091-00</b>
			
	<b>KLUDI COCKPIT Explorer</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 40 °C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve left shower outlet head shower rotary valve right protected against back flow dirt catcher sieves KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6445005-00 flow rate handshower 20 l/min bei 3 bar with KLUDI FRESHLINE handshower CL 1S 6450005-00 with mounting material	chrome    	<b>8005005-00</b> <b>NEW</b>
			
<b>Accessories</b>	<b>KLUDI COCKPIT shelf</b> 100 x 200 mm for Cockpit Explorer 8005005-00		<b>6410110-00</b> <b>NEW</b>
			















## SHOWER SYSTEMS

product	product description	surface	art. no.
 	<b>KLUDI A-QA</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 KLUDI A-QA handshower rotate the handle to the rear shower outlet KLUDI A-QA head shower rotary valve protected against back flow dirt catcher sieves KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower 4940205-00 flow rate 23 l/min at 3 bar with KLUDI A-QA hand shower 3910005-00 with spray mode: volume flow rate 16 l/min at 3 bar with mounting material	chrome   	<b>4909505-00</b>
	<b>KLUDI A-QA s</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube protected against back flow temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve dirt catcher sieves head shower Ø 200 mm flow rate 16,3 l/min at 3 bar hand shower KLUDI A-QA s adjustable to three spray patterns: booster, smooth, volume flow rate 11,6 l/min (booster) / 11,7 l/min (smooth) / 15,5 l/min (volumen) at 3 bar with mounting material	chrome    	<b>6609505-00</b>














## SHOWER SYSTEMS

product	product description	surface	art. no.
	 <p><b>KLUDI A-QA s</b> <b>Thermostat Dual Shower System DN 15</b> with horizontally and vertically adjustable tube wall fastening temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 KLUDI A-QA handshower r otate the handle to the rear shower outlet G 3/4 KLUDI A-QA head shower rotary valve protected against back flow horizontal and vertical adjustable slider KLUDI SUPARAFLEX Hose DN 15 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 250 mm, swiveling flow rate 16,3 l/min at 3 bar with KLUDI A-QA s handshower DN 15 with three spray patterns flow rate 11,6 l/min (booster) / 11,7 l/min (smooth) / 15,5 l/min (volumen) at 3 bar with mounting material dirt catcher sieves</p>	chrome    	<b>6619505-00</b>
	 <p><b>KLUDI LOGO</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve dirt catcher sieves protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 16 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 13,5 l/min (booster) / 10 l/min (smooth) / 15 l/min (volumen) at 3 bar with draining function with mounting material</p>	chrome    	<b>6809205-00</b>












## SHOWER SYSTEMS

product	product description	surface	art. no.
	 <p><b>KLUDI LOGO</b> <b>Thermostat Dual Shower System DN 15</b> horizontal and vertical adjustable slider wall fastening temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve to the rear dirt catcher sieves protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 16 l/min at 3 bar with KLUDI LOGO 1S hand shower DN 15 6810005-00 flow rate 21 l/min at 3 bar with mounting material</p>	chrome  	<b>6809405-00</b> <b>NEW</b>
	 <p><b>KLUDI LOGO</b> <b>Thermostat Dual Shower System DN 15</b> with horizontally and vertically adjustable tube horizontal and vertical adjustable slider wall fastening temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve dirt catcher sieves protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 16 l/min at 3 bar with KLUDI LOGO 1S hand shower DN 15 6810005-00 flow rate 21 l/min at 3 bar with mounting material</p>	chrome   	<b>6809505-00</b>













## SHOWER SYSTEMS

product	product description	surface	art. no.
 	<b>KLUDI LOGO Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow 13 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 12,9 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer	chrome   	<b>6809105-00</b>
 	<b>KLUDI LOGO Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow 13 l/min at 3 bar with KLUDI LOGO 1S hand shower DN 15 6810005-00 flow rate 16 l/min at 3 bar with mounting material without shower mixer	chrome  	<b>6809305-00</b>


















## SHOWER SYSTEMS

product	product description	surface	art. no.
	 <p><b>KLUDI LOGO</b> <b>single lever mixer Dual Shower System DN 15</b> solid lever wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider ceramic cartridge with hot water limitation shower outlet G 1/2 90° adjustable rotary valve for the control of head and hand shower shower outlet protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 18 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 17 l/min (volumen) at 3 bar with draining function with mounting material</p>	chrome   	<b>6808505-00</b>
	 <p><b>KLUDI LOGO</b> <b>single lever mixer Dual Shower System DN 15</b> with bath filler solid lever wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider ceramic cartridge with hot water limitation shower outlet G 1/2 120° adjustable rotary valve for the control of head-, hand shower and bath filler shower outlet protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower Ø 200 mm flow rate 21 l/min at 3 bar with KLUDI LOGO hand shower 3S 6830005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 17 l/min (volumen) at 3 bar with draining function with mounting material</p>	chrome   	<b>6808305-00</b>














## SHOWER SYSTEMS

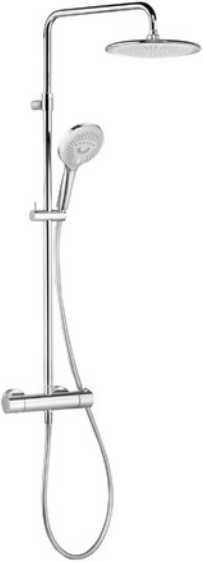product	product description	surface	art. no.
	 <p><b>KLUDI A-QA Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER G 1/2 x G 1/2 x 1600 mm with KLUDI A-QA headshower 4940205-00 flow rate 23 l/min at 3 bar with KLUDI A-QA hand shower 3910005-00 with spray mode: volume flow rate 16 l/min at 3 bar with mounting material</p>	chrome  	<b>4919105-00</b>
	 <p><b>KLUDI A-QA s Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX Hose DN 15 G 1/2 x G 1/2 x 1600 mm head shower Ø 200 mm flow rate 14,8 l/min at 3 bar hand shower KLUDI A-QA s adjustable to three spray patterns: booster, smooth, volume flow rate 10,5 l/min (booster) / 10,7 l/min (smooth) / 12,9 l/min (volumen) at 3 bar with mounting material without shower mixer</p>	chrome   	<b>6609105-00</b>
	 <p><b>KLUDI A-QA Thermostat Mono Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube temperature control handle 38° C with hot water safety device 38° C ceramic shut-off valve 180° 50 % water consumption regulation head shower Ø 200 mm 6651005-00 flow rate 22 l/min at 3 bar s-connections with mounting material dirt catcher sieves</p>	chrome    	<b>6608105-00</b>














## SHOWER SYSTEMS

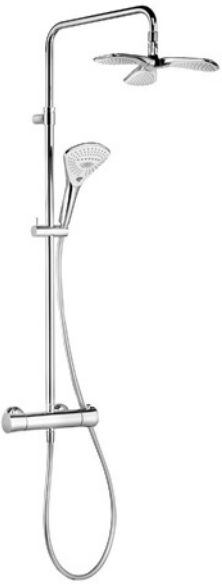product	product description	surface	art. no.
 	<b>KLUDI FRESHLINE Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6751105-00 flow rate 16,4 l/min at 3 bar with KLUDI FRESHLINE handshower RL 3S 6790005-00 flow rate 13,6 l/min (booster) / 10,9 l/min (smooth) / 17,1 l/min (volumen) at 3 bar with draining function with mounting material	chrome    	<b>6709205-00</b>
 	<b>KLUDI FRESHLINE Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube two-way ceramic diverter horizontal and vertical adjustable slider water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FRESHLINE head shower 6751105-00 flow rate 14 l/min at 3 bar with KLUDI FRESHLINE handshower RL 3S 6790005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 9 l/min (smooth) / 12 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer	chrome   	<b>6709005-00</b>





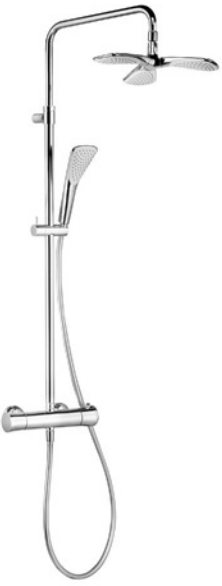







## SHOWER SYSTEMS

product	product description	surface	art. no.
	 <p><b>KLUDI FIZZ</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 20 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 flow rate 11,6 l/min (booster) / 11,7 l/min (smooth) / 15,5 l/min (volumen) at 3 bar with draining function with mounting material</p>	chrome    	<b>6709605-00</b>
	 <p><b>KLUDI FIZZ</b> <b>Thermostat Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider temperature control handle with hot water safety device 38° C with ceramic shut-off valve as rotary valve 90°/90° shower outlet G 1/2 hand shower rotary valve shower outlet head shower rotary valve protected against back flow dirt catcher sieves KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 20 l/min at 3 bar with KLUDI FIZZ handshower 1S 6760005-00 flow rate 15,5 l/min at 3 bar with mounting material</p>	chrome   	<b>6709505-00</b>



## SHOWER SYSTEMS

product	product description	surface	art. no.
	 <p><b>KLUDI FIZZ</b> <b>Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757805-00 flow rate 15 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 8,5 l/min (smooth) / 11 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer</p>	chrome   	<b>6709305-00</b>
	 <p><b>KLUDI FIZZ</b> <b>Dual Shower System DN 15</b> wall fastening with horizontally and vertically adjustable tube horizontal and vertical adjustable slider two-way ceramic diverter water supply with connecting hose G 1/2 x G 1/2 x 800 mm KLUDI SUPARAFLEX SILVER hose 6107205-00 with KLUDI FIZZ head shower 6757505-00 flow rate 15 l/min at 3 bar with KLUDI FIZZ handshower 3S 6770005-00 adjustable to three spray patterns: booster, smooth, volume flow rate 10 l/min (booster) / 8,5 l/min (smooth) / 11 l/min (volumen) at 3 bar with draining function with mounting material without shower mixer</p>	chrome   	<b>6709105-00</b>






## SHOWER SYSTEMS

### product



### product description



**KLUDI ZENTA**  
**Dual Shower System DN 15**  
wall fastening  
with horizontally and vertically adjustable tube  
horizontal and vertical adjustable slider  
two-way ceramic diverter  
water supply with  
connecting hose  
G 1/2 x G 1/2 x 800 mm  
KLUDI SUPARAFLEX Hose DN 15  
G 1/2 x G 1/2 x 1600 mm  
head shower Ø 200 mm  
flow 13 l/min at 3 bar  
hand shower KLUDI ZENTA 2S  
flow rate 11 l/min at 3 bar  
with mounting material  
without shower mixer

### surface

chrome













### art. no.

**6609005-00**













## SPECIAL SHOWERS

product		product description	surface	art. no.
wall rails	 	<b>KLUDI STANDARD wall rail</b> L = 600 mm incl. concealed wall-mounting with cover caps and wall spacer 5 mm	chrome	<b>6048005-00</b>
Accessories	 	<b>shower hook for hoses with conical nut</b> with screws and dowels	chrome white	<b>6305005-00</b> <b>6305043-00</b>
	 	<b>universal shower holder G 1/2</b> <b>for assembling at shower connection</b> for shower hoses with conical nut	chrome	<b>6053905-00</b>
	 	<b>shower hook G 1/2 with coupling</b>	chrome	<b>6053105-00</b>
	 	<b>connection for shower G 3/4 with cradle hook</b>	chrome	<b>6053705-00</b>









## SPECIAL SHOWERS

product	product description	surface	art. no.
 	<b>wall supply DN 15 with wall-compensation ring</b>	chrome white matt black	<b>6306005-00</b> <b>6306043-00</b> <b>6306039-00</b> <b>NEW</b>
 	<b>wall supply DN 15 protected against back flow</b> according to DIN EN 1717 with wall-compensation ring	chrome white matt black	<b>6306105-00</b> <b>6306143-00</b> <b>6306139-00</b> <b>NEW</b>
 	<b>wall supply DN 15 with wall flange (escutcheon)</b>	chrome	<b>6054005-00</b>
 	<b>corner mounting set for wall rail</b> two corner elements with screws and dowels for 6839005-00, 6839305-00, 6836005-00, 6836305-00, 6819005-00, 6816005-00, 6809005- 00, 6806005-00, 6857605-00, 6857705-00 for 60850, 60840, 60830, 60740, 60730, 60640, 60630, 60620, 60610, 60576, 60577	chrome	<b>6211905-00</b>
<b>Spare parts</b>	<b>KLUDI LOGO</b> <b>soap dish for wall rail</b> for tube diameter 18 mm	transparent	<b>6110121-00</b>
 			













## SPECIAL SHOWERS

product	product description	surface	art. no.
 	<b>slider for wall rails and shower-sets</b> with tube-diameter 23 mm	chrome	<b>6253505-00</b>
 	<b>slider for wall rails and shower-sets</b> with tube-diameter 18 mm	chrome	<b>7133705-00</b>
	<b>body for wall holder for wall rails and shower-sets</b> with tube-diameter 23 mm	chrome	<b>83031305-00</b>
	<b>body for wall holder for wall rails and shower-sets</b> with tube-diameter 18 mm	chrome	<b>83012605-00</b>







## SHOWER HOSES

product	product description		surface	art. no.
		<b>KLUDI SUPARAFLEX SILVER/WHITE shower hose DN 15</b> plastic-coated with metal-effect with conical nuts both sides anti twist G 1/2 x G 1/2 x 1600 mm	chrome white/chrome matt black/ chrome	<b>6107205-00</b> <b>6107291-00</b> <b>6107287-00</b> <b>NEW</b>
		<b>KLUDI SUPARAFLEX SILVER/WHITE shower hose DN 15</b> plastic-coated with metal-effect with conical nuts both sides anti twist G 1/2 x G 1/2 x 1250 mm	chrome white/chrome matt black/ chrome	<b>6107105-00</b> <b>6107191-00</b> <b>6107187-00</b> <b>NEW</b>
		<b>KLUDI SIRENAFLEX shower hose DN 15</b> plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 1600 mm	chrome	<b>6100605-00</b>
		<b>KLUDI SIRENAFLEX shower hose DN 15</b> plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 2000 mm	chrome	<b>6100705-00</b>
		<b>KLUDI LOGOFLEX shower hose DN 15</b> plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 1250 mm	chrome	<b>6105505-00</b>













## SHOWER HOSES

product	product description		surface	art. no.
 	<b>KLUDI LOGOFLEX shower hose DN 15</b> plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 1600 mm		chrome	<b>6105605-00</b>
 	<b>KLUDI LOGOFLEX shower hose DN 15</b> plastic-coated with metal-effect with conical nuts G 1/2 x G 1/2 x 2000 mm		chrome	<b>6105705-00</b>













## ACCESSORIES FOR ALL SHOWER RANGES

product		product description	surface	art. no.
		<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 400 mm with push-on rosette 58 x 58 mm	chrome	<b>6654405-00</b>
		<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 250 mm with push-on rosette 58 x 58 mm	chrome	<b>6654305-00</b>
		<b>KLUDI A-QA ceiling arm DN 15</b> for head shower DN 15 projection 150 mm with push-on rosette 58 x 58 mm	chrome	<b>6654505-00</b>
		<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 400 mm with push-on rosette diameter 55 mm	chrome white/chrome matt black/ chrome	<b>6651405-00</b> <b>6651491-00</b> <b>6651487-00</b> <b>NEW</b>
		<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 250 mm with push-on rosette diameter 55 mm	chrome	<b>6651305-00</b>













## ACCESSORIES FOR ALL SHOWER RANGES

product	product description	surface	art. no.
 	<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 400 mm with push-on rosette 61 x 61 mm	chrome white/chrome	<b>6653405-00</b> <b>6653491-00</b>
 	<b>KLUDI A-QA shower arm DN 15</b> for head shower DN 15 projection 250 mm with push-on rosette 61 x 61 mm	chrome	<b>6653305-00</b>
 	<b>KLUDI A-QA shower arm DN 15</b> for head shower 1S and 3S without ball joint projection 130 mm	chrome	<b>6235305-00</b>
 	<b>KLUDI A-QA ceiling arm DN 15</b> for head shower DN 15 projection 150 mm with push-on rosette diameter 55 mm	chrome white/chrome matt black/ chrome	<b>6651505-00</b> <b>6651591-00</b> <b>6651587-00</b> <div>NEW</div>
 	<b>KLUDI A-QA ceiling arm DN 15</b> for head shower DN 15 projection 150 mm with push-on rosette 61 x 61 mm	chrome white/chrome	<b>6653505-00</b> <b>6653591-00</b>





## ACCESSORIES FOR ALL SHOWER RANGES

product	product description	surface	art. no.
 	<b>KLUDI A-QA fixed wall shower hook</b> for hoses with conical nut with screws and dowels	chrome white	<b>6555105-00</b> <b>6555143-00</b>
 	<b>KLUDI A-QA wall supply DN 15</b> with wall-compensation ring	chrome white	<b>6554005-00</b> <b>6554043-00</b>
 	<b>KLUDI A-QA wall supply DN 15</b> protected against back flow according to DIN EN 1717 with wall-compensation ring	chrome white	<b>6554305-00</b> <b>6554343-00</b>
<b>Spare parts</b>  	<b>slider for wall rails and shower-sets</b> with tube-diameter 23 mm	chrome	<b>7486905-00</b>
 	<b>slider for wall rails and shower-sets</b> with tube-diameter 23 mm	chrome	<b>7833305-00</b>





# Wastes



---

**Washbasin and  
bidet wastes**  
224





---

**Bath and shower  
wastes**  
229













## WASHBASIN AND BIDET WASTES

product		product description	surface	art. no.
Basin	 	<b>PUSH-OPEN waste G 1 1/4 lockable plug G 1 1/4</b> for wash basin with overflow waste flow rate >32 l/min overflow capacity approx 20 l/min	chrome	<b>1042405-00</b>
	 	<b>KLUDI shank valve with waste cap G 1 1/4</b> for wash basin without overflow not lockable	chrome	<b>1042805-00</b>
	 	<b>shank valve G 1 1/4 with overflow</b> without ball chain and chainholder	chrome	<b>1042705-00</b>
	 	<b>universal plug-valve G 1 1/4 valve sieve made of chrome Ø 63 mm</b> thread sub-frame plastic white with ball chain and holder	chromium nickel steel	<b>1140235-00</b>
	 	<b>universal plug-valve G 1 1/4 valve sieve made of chrome Ø 63 mm</b> thread sub-frame brass nickel-plated	chromium nickel steel	<b>1041135-00</b>








## WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
	 <p><b>design-bow lever G 1 1/4</b> <b>G 1 1/4 x 32 mm</b> with discharge-tube Ø 32 x 290 mm with push-on rosette diameter 65 mm adjustable drain pipe up to 120 mm with locker for cleaning according to DIN EN 274</p>	chrome	1002005-00
	 <p><b>bottle trap G 1 1/4</b> <b>G 1 1/4 x 32 mm</b> with discharge-tube Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274</p>	chrome	1010505-00
	 <p><b>P-trap G 1 1/4</b> <b>G 1 1/4 x 32 mm, standard model</b> with bent outlet Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274</p>	chrome	1025005-00
	 <p><b>P-trap G 1 1/4</b> <b>G 1 1/4 x 32 mm</b> adjustable drain pipe up to 120 mm with bent outlet Ø 32 x 220 mm with wall flange (escutcheon) Ø 80 mm according to DIN EN 274</p>	chrome	1026505-00
	 <p><b>bottle trap G 1 1/4</b> <b>G 1 1/4 x 32 mm</b> with universal plug-valve brass with discharge-tube Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274</p>	chrome	1011105-00













## WASHBASIN AND BIDET WASTES

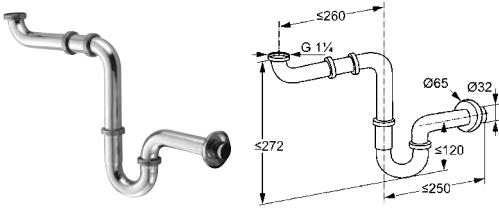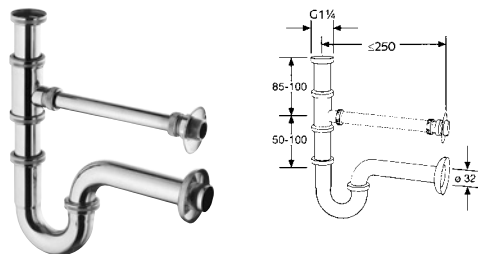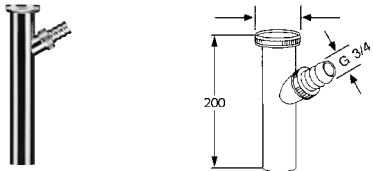product	product description	surface	art. no.
	<b>KLUDI</b> <b>place-saving bottle trap</b> with wall flange (escutcheon) Ø 65 mm with bent outlet Ø 32 mm according to DIN EN 274 G 1 1/4 x 32 mm	chrome	<b>1025505-00</b>
	<b>P-trap G 1 1/4</b> <b>G 1 1/4 x 32 mm</b> with adjustable thread and spout for water drainage G 3/4 with straight inlet with bent outlet Ø 32 x 200 mm with wall flange (escutcheon) according to DIN EN 274	chrome	<b>1036105-00</b>
<b>Bidet</b> 	<b>bidet P - trap</b> <b>G 1 1/4 x 32 mm</b> with bent outlet Ø 32 x 200 mm with wall flange (escutcheon) Ø 65 mm according to DIN EN 274	chrome	<b>1031105-00</b>
<b>Accessories</b> 	<b>pipe coupling</b> <b>with 2 threads</b> for tube connection with 32 mm diameter	chrome	<b>1043205-00</b>
	<b>adjustable tube</b> <b>hose thread G 3/4</b> for connection of the drain hose from washing machines G 1 1/4 x 200 mm	chrome	<b>1046205-00</b>



## WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
 	<b>extension tube</b> with o-ring for extension of adjustable and outlet pipes Ø 32 x 125 mm	chrome	<b>1049905-00</b>
 	<b>outlet tube straight</b> with flanged rim Ø 32 x 200 mm	chrome	<b>84501605-00</b>
 	<b>outlet tube straight</b> with flanged rim 32 x 250 mm	chrome	<b>84506605-00</b>
 	<b>outlet tube straight</b> with flanged rim Ø 32 x 300 mm	chrome	<b>84502505-00</b>
 	<b>outlet tube straight</b> without edged flange Ø 32 x 300 mm	chrome	<b>84514605-00</b>



## WASHBASIN AND BIDET WASTES

product	product description	surface	art. no.
	<b>floor tube 90° DN 32</b> <b>G 1 1/4 x 220 x 680 mm</b>	chrome	<b>84500805-00</b>
	<b>tap rosette G 1/2</b> <b>height 5 mm</b>	chromium nickel steel	<b>82027235-00</b>
	<b>Plug G 3/8</b> <b>to seal connections not in use</b> involved with rosette	chrome	<b>7034505-00</b>
	<b>Plug G 1/2</b> <b>to seal connections not in use</b> involved with rosette	chrome	<b>7034605-00</b>















## BATH- AND SHOWER WASTES

product	product description	surface	art. no.
<b>Bath</b> 	<b>KLUDI ROTEXA MULTI filling, waste and overflow</b> trim set flow class C s-pointer aerator M 24 x 1 filling unit with fastening screws and plug with big valve disc noise level I	chrome	<b>7182605-00</b>
 	<b>KLUDI ROTEXA MULTI bath filling, waste and overflow set G 1 1/2</b> pre-installation set for water intake connection G 1/2 incl. sink-kit with attached bottle-trap 2 swivel-joints 50 mm water seal height without trim set noise level I approved acc. to DIN 19545	neutral	<b>2131500-00</b>
 	<b>Nirosta-pressure hose G 1/2 x G 1/2 x 600 mm</b> for KLUDI ROTEXA MULTI hot water resistant	neutral	<b>6115000-00</b>
 	<b>cover cap for tube interrupter DN 15</b> trim set for 1077205-00	chrome	<b>82308505-00</b>
 	<b>KLUDI ROTEXA MULTI pipe interrupter DN 15</b> pre-installation set with extension protected against back flow DIN-DVGW certified	neutral	<b>1077200-00</b>













## BATH- AND SHOWER WASTES

product		product description	surface	art. no.
		<b>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2</b> with bowden cable for bath- and deep showertubs with attached bottle-trap 2 swivel-joints 50 mm water seal height	chrome	<b>2140605-00</b>
		<b>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2</b> with bowden cable for bath- and deep showertubs with flexible overflow tube with attached bottle-trap 2 swivel-joints 50 mm water seal height	chrome	<b>2140705-00</b>
		<b>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2</b> with bottle trap 2138510 with bowden cable with flexible overflow tube for fitted dimensions up to 450 mm with valve - head part	chrome	<b>2140805-00</b>
		<b>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2</b> bowden cable 850 mm long with flexible overflow tube 760 mm for special tubs with attached bottle-trap 2 swivel-joints with valve - head part	chrome	<b>2140905-00</b>
		<b>KLUDI pop-up and overflow set</b> trim set rosette plate and plug with big valve disc	chrome	<b>7108005-00</b>



## BATH- AND SHOWER WASTES

product	product description	surface	art. no.
 	<b>KLUDI ROTEXA 2000 pop-up and overflow set G 1 1/2</b> pre-installation set with bowden cable for bathtubs and deep showertubs with attached bottle-trap 2 swivel-joints 50 mm water seal height according to DIN EN 274	neutral	<b>2108000-00</b>
 	<b>extension set for KLUDI ROTEXA</b> for 2108000-00/ 2130005N-00/ 2140605-00/ 2140705-00/ 2140805-00/ with Bowden cable, 820 mm long for special tubs 2 fixing brackets with flexible overflow tube 900 mm	neutral	<b>7295600-00</b>
<b>Shower</b>  	<b>KLUDI TASSO 90 pop-up waste</b> trim set according to DIN EN 274 approved according to LGA-Bayern	chrome	<b>7137005-00</b>
 	<b>KLUDI TASSO 90 pop-up waste</b> for flat shower tubs with 90 mm waste hole diameter with removable bottle trap cleanable approved acc. to DIN 19545/274 approved according to LGA-Bayern	neutral	<b>2109100-00</b>
 	<b>KLUDI TASSO 50 pop-up waste</b> trim set according to DIN EN 274 approved according to LGA-Bayern	chrome	<b>7152005-00</b>



## BATH- AND SHOWER WASTES

product	product description	surface	art. no.
 	<b>KLUDI TASSO 50</b> <b>pop-up waste</b> for flat shower tubs waste hole diameter Ø 52 mm with removable bottle trap according to DIN EN 274 approved according to LGA-Bayern	neutral	<b>2152000-00</b>



# Hospital and care


















---

**KLUDI MEDICARE**  
234


















## KLUDI MEDI CARE

product		product description	surface	art. no.
Sink				
		<b>KLUDI MEDI CARE</b> <b>single lever sink mixer DN 15</b> clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout projection 200 mm rapid installation set copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 120 mm	chrome 	<b>349080524</b>
		<b>KLUDI MEDI CARE</b> <b>single lever sink mixer DN 15</b> care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout projection 200 mm rapid installation set copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 120 mm	chrome 	<b>349080534</b>
Basin				
		<b>KLUDI MEDI CARE</b> <b>single lever basin mixer DN 15</b> clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation pop-up waste G 1 1/4 rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 90 mm	chrome 	<b>341150524</b>
		<b>KLUDI MEDI CARE</b> <b>single lever basin mixer DN 15</b> clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 90 mm	chrome 	<b>341120524</b>
		<b>KLUDI MEDI CARE</b> <b>single lever basin mixer DN 15</b> clinic lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set swivelling spout copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 90 mm	chrome 	<b>341130524</b>













KLUDI MEDI CARE

product	product description	surface	art. no.
	 <p><b>KLUDI MEDI CARE</b> <b>single lever basin mixer DN 15</b> care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set fixed spout copper tubes 10 mm P-IX 9571/IIZ spout height lower edge 90 mm</p>	chrome 	<b>341120534</b>
	 <p><b>KLUDI MEDI CARE</b> <b>single lever basin mixer DN 15</b> care lever single hole mounted flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation rapid installation set swivelling spout copper tubes 10 mm P-IX 9572/IIZ spout height lower edge 90 mm</p>	chrome 	<b>341130534</b>
	 <p><b>KLUDI MEDI CARE</b> <b>wall mounted single lever mixer DN 15</b> clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout s-connections projection 180 mm PA-IX 9573/IZ</p>	chrome 	<b>349220524</b>
	 <p><b>KLUDI MEDI CARE</b> <b>wall mounted single lever mixer DN 15</b> clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout projection 245 mm s-connections PA-IX 9573/IZ</p>	chrome 	<b>349200524</b>
	 <p><b>KLUDI MEDI CARE</b> <b>wall mounted single lever mixer DN 15</b> clinic lever wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout projection 250 mm lockable S-connections PA-IX 9574/IZ</p>	chrome 	<b>349210524</b>











## KLUDI MEDI CARE

product	product description	surface	art. no.
 	<b>KLUDI STANDARD CARE wall fitting DN 15</b> wall fastening flow rate 8 l/min at 3 bar casted spout care-aerator M 24 x 1 s-connections PA-IX 8668/IZ handle O8 = handle Terralux metal	chrome	<b>320040508</b>
<b>Bath</b>  	<b>KLUDI MEDI CARE thermostatic hospital mixer DN 15</b> wall fastening flow rate 8 l/min at 3 bar care-aerator M 24 x 1 temperature control handle hot water safety device 40 °C clinic lever shut-off valve dirt catcher sieves lockable S-connections PA-IX 9022/IZ	chrome 	<b>350850564</b>
<b>Shower</b>  	<b>KLUDI PROVITA thermostatic shower mixer DN 15</b> wall fastening temperature control handle with hot water safety device 38° C unlocking via Allen key by the lockable button ceramic shut-off valve 180° shower outlet G 1/2 protected against back flow flow class B dirt catcher sieves lockable S-connections P-IX 8049/IB	chrome 	<b>353300538</b>
 	<b>KLUDI SIRENA CARE barrier free shower bar</b> L = 900 mm integrated grab handles length of handle: 90° = 250 mm, 135° = 300 mm, left and right suitable 50 mm projection fastening set with special dowels continuously adjustable slider adjustable by pulling-down the shower hose vertically and horizontally adjustable adjustable shower holder Supraflex shower hose anti twist G 1/2 x G 1/2 x 1600 mm with conical nuts	chrome	<b>6150205-00</b>





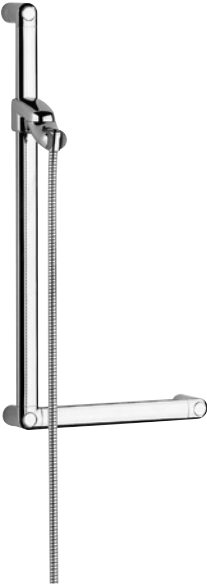


KLUDI MEDI CARE

product	product description	surface	art. no.
	 <p><b>KLUDI SIRENA CARE barrier free shower bar</b> L = 900 mm integrated grab handles (length of handle 250 mm und 90° angle), left and right suitable 50 mm projection fastening set with special dowels continuously adjustable slider adjustable by pulling-down the shower hose vertically and horizontally adjustable adjustable shower holder Supraflex shower hose anti twist G 1/2 x G 1/2 x 1600 mm with conical nuts</p>	chrome	6150305-00
	 <p><b>KLUDI SIRENA CARE barrier free bathtub holder</b> length of handle 250 and 300 mm, horizontal and 45° angle 50 mm projection fastening set with special dowels</p>	chrome	6150505-00
	 <p><b>KLUDI SIRENA CARE barrier free bathtub holder</b> length of handle 300 mm 50 mm projection fastening set with special dowels</p>	chrome	6150605-00
<b>Accessories</b>	  <p><b>KLUDI place-saving bottle trap</b> with wall flange (escutcheon) Ø 65 mm with bent outlet Ø 32 mm according to DIN EN 274 G 1 1/4 x 32 mm</p>	chrome	1025505-00



## KLUDI MEDI CARE

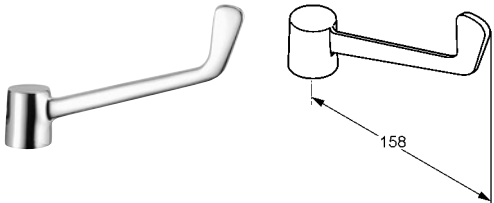product	product description	surface	art. no.
Spare parts	KLUDI MEDI CARE clinic lever	chrome	7694305-00
			
	KLUDI MEDI CARE care lever	chrome	7694205-00
			
	Thermostat clinic lever	chrome	7563805-00
			



# Kitchen fittings



**KLUDI E-GO**  
240



**KLUDI STEEL**  
242



**KLUDI MX**  
243



**KLUDI L-INE**  
246



**KLUDI L-INE S**  
248



**KLUDI BINGO STAR**  
249



**KLUDI BINGO STAR XS**  
251



**KLUDI BOZZ**  
252



**KLUDI ZENTA**  
253



**KLUDI OBJEKTA**  
254



**KLUDI TREND0**  
256



**KLUDI SCOPE**  
258











**KLUDI LOGO NEO**  
260



**KLUDI STANDARD**  
262



## KLUDI E-GO

product	product description	surface	art. no.
<b>Sink</b> 	 <b>KLUDI E-GO</b> <b>electronic controlled single lever sink mixer DN 15</b> solid lever single hole mounted caché-aerator M 21,5 x 1 ceramic cartridge with hot water limitation Flow rate manual operation 10,5 l/min at 3 bar Flow rate electronic release approx. 5,0 l/min at 3 bar adjustable temperature through lever setting optical object-detection automatic initial sensor measurement electric power supply via 230 V main adapter with magnet-cartridge-valve swivelling spout (360°) backflow preventer with dirt trap screens with optional hygienic flushing every 12 or 24 hours rapid installation set flexible hoses G 3/8 noise level I	chrome  	<b>422000575</b>
	 <b>KLUDI E-GO</b> <b>electronic controlled single lever sink mixer DN 15</b> solid lever single hole mounted caché-aerator M 21,5 x 1 ceramic cartridge with hot water limitation Flow rate manual operation 10,5 l/min at 3 bar Flow rate electronic release approx. 5,0 l/min at 3 bar adjustable temperature through lever setting optical object-detection automatic initial sensor measurement electronic unit with battery control device 6 V lithium battery CR-P2 with magnet-cartridge-valve swivelling spout (360°) backflow preventer with dirt trap screens with optional hygienic flushing every 12 or 24 hours rapid installation set flexible hoses G 3/8 noise level I	chrome  	<b>422100575</b>




KLUDI E-GO

product

product description

surface


art. no.



**KLUDI E-GO**  
**electronic controlled single lever sink mixer DN 15**  
solid lever  
single hole mounted  
caché-aerator M 16,5 x 1  
water flow regulator 8 l/min  
ceramic cartridge with hot water limitation  
Flow rate manual operation 8,1 l/min at 3 bar  
Flow rate electronic release approx. 4,1 l/min at 3 bar  
swivelling spout (360°)  
removable mouthpiece  
adjustable temperature through lever setting  
optical object-detection  
automatic initial sensor measurement  
electric power supply via 230 V main adapter  
with magnet-cartridge-valve  
backflow preventer with dirt trap screens  
protected against back flow  
with optional hygienic flushing every 12 or 24 hours  
rapid installation set  
flexible hoses G 3/8

chrome

**422050575**



**KLUDI E-GO**  
**electronic controlled single lever sink mixer DN 15**  
solid lever  
single hole mounted  
caché-aerator M 16,5 x 1  
water flow regulator 8 l/min  
ceramic cartridge with hot water limitation  
Flow rate manual operation 8,1 l/min at 3 bar  
Flow rate electronic release approx. 4,1 l/min at 3 bar  
swivelling spout (360°)  
removable mouthpiece  
adjustable temperature through lever setting  
optical object-detection  
automatic initial sensor measurement  
electronic unit with battery control device  
6 V lithium battery CR-P2  
with magnet-cartridge-valve  
backflow preventer with dirt trap screens  
protected against back flow  
with optional hygienic flushing every 12 or 24 hours  
rapid installation set  
flexible hoses G 3/8

chrome

**422150575**



Spare parts

**KLUDI E-GO**  
**lever for single lever sink mixer**  
42200, 42205, 42210, 42215







chrome

**7489505-00**






















KLUDI STEEL

product		product description	surface	art. no.
Sink		 <p><b>KLUDI STEEL</b> <b>single lever sink mixer DN 15</b> solid lever material: stainless steel single hole mounted flow regulator M 24 x 1 flow rate 12,7 l/min at 3 bar ceramic cartridge with hot water limitation swivelling spout (360°) flexible hoses G 3/8 with shank fastening</p>	stainless steel brushed	<b>44850F860</b>
		 <p><b>KLUDI STEEL</b> <b>single lever sink mixer DN 15</b> with pull-out hand spray solid lever material: stainless steel single hole mounted flow regulator M 18 x 1 flow rate 8,1 l/min at 3 bar swivelling spout (110°) ceramic cartridge with hot water limitation automatic diverter: shower/spray protected against back flow flexible hoses G 3/8 with shank fastening</p>	stainless steel brushed  	<b>44851F860</b>




















## KLUDI MX

product		product description	surface	art. no.
Sink		 <p><b>KLUDI MX single lever sink mixer DN 15</b> open ring lever single hole mounted flow class A cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 P-IX 18638/1A</p>	chrome mocca/chrome white/chrome	<b>399040562</b> <b>399048262</b> <b>399049262</b>
		 <p><b>KLUDI MX single lever sink mixer DN 15</b> open ring lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters P-IX 18641/I</p>	chrome  	<b>399050562</b>
		 <p><b>KLUDI MX multi single lever sink mixer DN 15</b> open ring lever single hole mounted flow class A cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set one connection for washing machine or dishwasher flexible hoses G 3/8 PA-IX 18645/1A</p>	chrome mocca/chrome white/chrome 	<b>399060562</b> <b>399068262</b> <b>399069262</b>
		 <p><b>KLUDI MX multi single lever sink mixer DN 15</b> open ring lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set one connection for washing machine or dishwasher flexible hoses G 3/8 for use with displacement heaters PA-IX 18646/I</p>	chrome   	<b>399070562</b>
		 <p><b>KLUDI MX single lever sink mixer bayonette DN 15</b> open ring lever single hole mounted flow class A cascade aerator M 24 x 1A ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm flexible hoses G 3/8 P-IX 18638/1A</p>	chrome 	<b>399340562</b>



## KLUDI MX

product	product description	surface	art. no.
 	<b>KLUDI MX single lever sink mixer DN 15</b> open ring lever single hole mounted flow class A s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray protected against back flow copper tubes 10 mm P-IX 18643/IAO	chrome mocca/chrome white/chrome   	<b>399410562</b> <b>399418262</b> <b>399419262</b>
 	<b>KLUDI MX single lever sink mixer DN 15</b> open ring lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray for use with displacement heaters copper tube 8/10 mm P-IX 18644/I	chrome    	<b>399420562</b>
 	<b>KLUDI MX multi single lever sink mixer DN 15</b> open ring lever single hole mounted flow class A s-pointer aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (110°) pull-out hand spray automatic diverter: shower/spray one connection for washing machine or dishwasher protected against back flow copper tubes 10 mm PA-IX 18642/IAO	chrome mocca/chrome white/chrome    	<b>399450562</b> <b>399458262</b> <b>399459262</b>

























## KLUDI MX

product	product description	surface	art. no.
<b>Spare parts</b>	<b>KLUDI kitchen showers</b> automatic diverter: shower/spray s-pointer aerator M 24 x 1 flow class A for 33941, 33945, 39941, 39945	chrome mocca white	<b>7403005-00</b> <b>7403019-00</b> <b>7403036-00</b>
			
	<b>KLUDI kitchen showers</b> automatic diverter: shower/spray with flow aerator M 24 x 1/ND flow rate 5 l/min for 33942, 33947, 39942	chrome	<b>7811905-00</b>
	<b>KLUDI MX lever for single lever sink mixer</b> 39904, 39905, 39906, 39907, 39934, 39941, 39942, 39945	chrome mocca white	<b>7488405-00</b> <b>7488419-00</b> <b>7488436-00</b>



## KLUDI L-INE

product	product description	surface	art. no.
<b>Sink</b>  	<b>KLUDI L-INE single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I	chrome 	<b>428140577</b>
 	<b>KLUDI L-INE single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min caché-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I for use with displacement heaters	chrome  	<b>428190577</b>
 	<b>KLUDI L-INE multi single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8 noise level I	chrome  	<b>428160577</b>
 	<b>KLUDI L-INE single lever sink mixer bayonette DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8 noise level I	chrome  	<b>428170577</b>
 	<b>KLUDI L-INE single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z caché Laminar-flow-regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (220°), pull-out telescopic spout with horizontal guidance (245 – 315 mm) protected against back flow with shank fastening flexible hoses G 3/8 noise level I	chrome   	<b>428210577</b>




KLUDI L-INE

product

product description

surface

art. no.

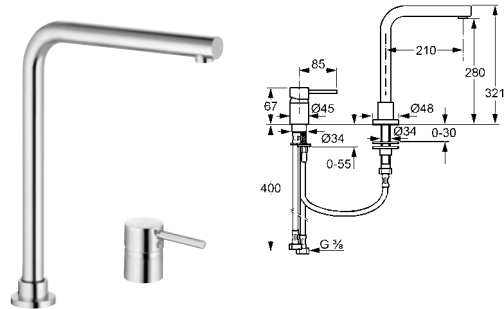

**KLUDI L-INE**  
**single lever sink mixer DN 15**  
solid lever  
two hole mounted  
flow class Z  
PCA caché-Laminar-flow regulator M 16,5 x 1  
ceramic cartridge with hot water limitation  
swivelling spout (360°)  
flexible hoses G 3/8  
rapid installation set  
noise level I

chrome



**428540577**

Spare parts

**KLUDI L-INE**  
**lever for single lever sink mixer**  
42814, 42816, 42817, 42819, 42821, 42853,  
42854








chrome

**7489205-00**

























## KLUDI L-INE S

product	product description		surface	art. no.	
Sink			<b>KLUDI L-INE S</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge Laminar-flow regulator M 18 x 1 flow rate 7,1 l/min at 3 bar swivelling spout (360°) flexible hoses G 3/8 with shank fastening	chrome 	<b>408030575</b>
			<b>KLUDI L-INE S</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge flow regulator M 16 x 1 flow rate 8,2 l/min at 3 bar swivelling (360°) pull-out spout protected against back flow flexible hoses G 3/8 with shank fastening	chrome matt white/ chrome matt black/ chrome  	<b>408510575</b> <b>408519375</b> <b>408518775</b>
















## KLUDI BINGO STAR

product		product description	surface	art. no.
Sink		 <p><b>KLUDI BINGO STAR single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 P-IX 9772/10</p>	chrome stainless steel look 	<b>428030578</b> <b>428039678</b>
		 <p><b>KLUDI BINGO STAR single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min caché-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters</p>	chrome stainless steel look  	<b>428090578</b> <b>428099678</b>
		 <p><b>KLUDI BINGO STAR multi single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8</p>	chrome  	<b>428360578</b>
		 <p><b>KLUDI BINGO STAR single lever sink mixer bayonette DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) flexible hoses G 3/8 for installation beneath windows remaining socket height: 25 mm</p>	chrome stainless steel look  	<b>428570578</b> <b>428579678</b>
		 <p><b>KLUDI BINGO STAR single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling (230°) pull-out spout flexible hoses G 3/8 protected against back flow</p>	chrome stainless steel look   	<b>428510578</b> <b>428519678</b>










## KLUDI BINGO STAR

product	product description	surface	art. no.
 	<b>KLUDI BINGO STAR single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z pull-out hand spray automatic diverter: shower/spray ceramic cartridge with hot water limitation swivelling spout (230°) with shank fastening flexible hoses G 3/8 protected against back flow	chrome   	<b>428520578</b>
 	<b>KLUDI BINGO STAR single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivel (360°) – removable spout protected against back flow rapid installation set flexible hoses G 3/8 noise level I	chrome  	<b>428590578</b>
 	<b>KLUDI BINGO STAR 200 single lever sink mixer DN 15</b> semi-profi version solid lever single hole mounted flow class A cascade aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling (220°) pull-out spout flexible hoses G 3/8 protected against back flow	chrome  	<b>428550578</b>
<b>Spare parts</b> 	<b>KLUDI BINGO STAR lever for single lever sink mixer</b> 42803, 42809, 42836, 42857, 42851, 42852, 42855, 42859	chrome stainless steel look	<b>7303805-00</b> <b>7303896-00</b>











KLUDI BINGO STAR XS

product	product description	surface	art. no.
<div>Sink</div> 	 <p><b>KLUDI BINGO STAR XS</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge swivelling spout (360°) rapid installation set flexible hoses G 3/8</p>	chrome 	<b>468030578</b>
	 <p><b>KLUDI BINGO STAR XS</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge swivelling (360°) pull-out spout flexible hoses G 3/8 protected against back flow</p>	chrome matt white/ chrome matt black/ chrome  	<b>468510578</b> <b>468519378</b> <b>468518778</b>












## KLUDI BOZZ

product		product description	surface	art. no.
Sink	 	<b>KLUDI BOZZ</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class A PCA caché-laminar-flow-regulator M 21,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) flexible hoses G 3/8 rapid installation set P-IX 9772/10	chrome	<b>428030576</b>
	 	<b>KLUDI BOZZ</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class Z PCA caché-Laminar-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling (230°) pull-out spout flexible hoses G 3/8 protected against back flow	chrome   	<b>428510576</b>
Spare parts		<b>KLUDI L-INE</b> <b>lever for single lever sink mixer</b> 42814, 42816, 42817, 42819, 42821, 42853, 42854	chrome	<b>7489205-00</b>






















## KLUDI ZENTA

product	product description	surface	art. no.
<b>Sink</b>			
	 <p><b>KLUDI ZENTA</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class A aerator M 24 x 1 ceramic cartridge swivelling spout (360°) flexible hoses G 3/8 noise level I</p>	chrome white/chrome black/chrome stainless steel look	<b>389730575</b> <b>389739175</b> <b>389738675</b> <b>389739675</b>
	 <p><b>KLUDI ZENTA</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters noise level I</p>	chrome  	<b>389790575</b>
<b>Spare parts</b>			
	<p><b>KLUDI ZENTA</b> <b>lever for single lever sink mixer</b> for 38973, 38979</p>	chrome white/chrome black/chrome stainless steel look	<b>7487205-00</b> <b>7487291-00</b> <b>7487286-00</b> <b>7487296-00</b>
	 <p><b>KLUDI ZENTA</b> <b>spacer escutcheon for base for KLUDI ZENTA</b> for 38973, 38979</p>	chrome	<b>92069905-00</b>













## KLUDI OBJEKTA

product		product description	surface	art. no.
Sink				
		<b>KLUDI OBJEKTA single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) flexible hoses G 3/8 rapid installation set	chrome	<b>325740575</b>
		<b>KLUDI OBJEKTA single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min swivelling spout (360°) flexible hoses G 3/8 rapid installation set for use with displacement heaters	chrome  	<b>325750575</b>
		<b>KLUDI OBJEKTA multi single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) one connection for washing machine or dish- washer rapid installation set flexible hoses G 3/8	chrome 	<b>325760575</b>
		<b>KLUDI OBJEKTA multi single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8 for use with displacement heaters	chrome   	<b>325770575</b>
		<b>KLUDI OBJEKTA single lever sink mixer bayonette DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 13,3 l/min at 3 bar swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8	chrome 	<b>325780575</b>




















## KLUDI OBJEKTA

product	product description	surface	art. no.
 	<b>KLUDI OBJEKTA single lever sink mixer DN 15</b> solid lever single hole mounted ceramic cartridge with hot water limitation s-pointer aerator M 24 x 1 flow class Z swivelling (110°), pull-out hand shower automatic diverter: shower/spray protected against back flow flexible hoses G 3/8 with shank fastening	chrome    	<b>325810575</b>
 	<b>KLUDI OBJEKTA wall mounted single lever sink mixer DN 15</b> solid lever wall fastening flow class B cascade aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout Projection 115 mm s-connections	chrome	<b>328810575</b>
 	<b>KLUDI OBJEKTA wall mounted single lever sink mixer DN 15</b> solid lever wall fastening flow class B cascade aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling or lockable spout projection 180 mm s-connections	chrome	<b>328820575</b>













## KLUDI TREND

product		product description	surface	art. no.
Sink		 <p><b>KLUDI TREND</b> <b>single lever sink mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class A swivelling spout (360°) flexible hoses G 3/8 rapid installation set G 3/8</p>	chrome stainless steel look	<b>335740575</b> <b>335749675</b>
		 <p><b>KLUDI TREND</b> <b>single lever sink mixer DN 15</b> solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters</p>	chrome stainless steel look  	<b>335750575</b> <b>335759675</b>
		 <p><b>KLUDI TREND</b> <b>multi single lever sink mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class A swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8</p>	chrome stainless steel look 	<b>335760575</b> <b>335769675</b>
		 <p><b>KLUDI TREND</b> <b>multi single lever sink mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow rate 5 l/min swivelling spout (360°) one connection for washing machine or dishwasher rapid installation set flexible hoses G 3/8 for use with displacement heaters</p>	chrome   	<b>335770575</b>
		 <p><b>KLUDI TREND</b> <b>single lever sink mixer bayonette DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class A swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8</p>	chrome stainless steel look 	<b>335780575</b> <b>335789675</b>

















## KLUDI TREND

product	product description	surface	art. no.
 	<b>KLUDI TREND</b> <b>multi single lever sink mixer bayonette DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 24 x 1 flow class A swivelling spout (360°) one connection for washing machine or dishwasher for installation beneath windows remaining socket height: 25 mm with shank fastening flexible hoses G 3/8	chrome  	<b>335790575</b>
 	<b>KLUDI TREND</b> <b>single lever sink mixer DN 15</b> single hole mounted solid lever ceramic cartridge with hot water limitation flow regulator M 16,5 x 1 flow class Z swivelling (110°), pull-out hand shower automatic diverter: shower/spray protected against back flow copper tubes 10 mm with shank fastening	chrome stainless steel look  	<b>335810575</b> <b>335819675</b>
<b>Spare parts</b>	<b>KLUDI TREND</b> <b>pull-out hand spray</b>	chrome stainless steel look	<b>7451805-00</b> <b>7451896-00</b>
			
	<b>KLUDI TREND</b> <b>lever for single lever sink mixer</b> 33574, 33575, 33576, 33577, 33578, 33579, 33581	chrome stainless steel look	<b>7301805-00</b> <b>7301896-00</b>










## KLUDI SCOPE

product		product description	surface	art. no.
Sink		 <p><b>KLUDI SCOPE</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class A caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I P-IX 19449/IO</p>	chrome	<b>339330575</b>
		 <p><b>KLUDI SCOPE</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min caché-flow regulator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters noise level I P-IX 19451/I</p>	chrome  	<b>339390575</b>
		 <p><b>KLUDI SCOPE XL</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class A caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I P-IX 19449/IO</p>	chrome	<b>339300575</b>
		 <p><b>KLUDI SCOPE</b> <b>single lever sink mixer bayonette DN 15</b> solid lever single hole mounted flow class A caché-aerator M 16,5 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) for installation beneath windows remaining socket height: 25 mm flexible hoses G 3/8 noise level I P-IX 19449/IO</p>	chrome 	<b>339380575</b>
		 <p><b>KLUDI SCOPE</b> <b>single lever sink mixer DN 15</b> solid lever single hole mounted flow class A aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling (110°) pull-out spout protected against back flow with shank fastening copper tubes 10 mm noise level I</p>	chrome 	<b>339310575</b>















## KLUDI SCOPE

product	product description	surface	art. no.
 	<b>KLUDI SCOPE single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling (110°) pull-out spout with shank fastening copper tube 8 mm for use with displacement heaters	chrome   	<b>339320575</b>
<b>Spare parts</b> 	<b>KLUDI SCOPE spout</b>	chrome	<b>7501005-00</b>
	<b>KLUDI SCOPE lever for single lever sink mixer</b> 33933, 33939, 33930, 33938	chrome	<b>7842105-00</b>





## KLUDI LOGO NEO

product		product description	surface	art. no.
<b>Sink</b>				
		<b>KLUDI LOGO NEO single lever sink mixer DN 15</b> solid lever single hole mounted flow class A aerator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 noise level I PA-IX 7526/IA	chrome	<b>379130575</b>
		<b>KLUDI LOGO NEO single lever sink mixer DN 15</b> solid lever single hole mounted flow rate 5 l/min flow regulator M 24 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) rapid installation set flexible hoses G 3/8 for use with displacement heaters noise level I PA-IX 7527/I	chrome  	<b>379190575</b>
		<b>KLUDI LOGO NEO wall mounted single lever sink mixer DN 15</b> solid lever wall fastening flow class A aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) G 3/4 x 200 mm s-connections noise level I	chrome	<b>379240575</b>
		<b>KLUDI LOGO NEO wall mounted single lever sink mixer DN 15</b> solid lever wall fastening distance from center to center 45 mm flow class A aerator M 22 x 1 ceramic cartridge with hot water limitation swivelling spout (360°) 200 mm s-connections G 1/2 x G 1/2 noise level I	chrome	<b>379140575</b>
<b>Accessories</b>				
		<b>extension for single lever sink mixer</b> 389130575/389190575 379130575/379190575 389630575/389590575	chrome	<b>7676005-00</b>




















## KLUDI LOGO NEO

product	product description		surface	art. no.
Spare parts	<div></div> <div><b>KLUDI LOGO NEO</b> <b>lever for single lever mixer</b> 37281, 37282, 37276, 37280, 37283, 37275, 37531, 37533, 37681, 37592, 37591, 37719, 37841, 37920, 37913, 37914, 37919, 37924, 37285, 37290</div>		chrome	<b>7495005-00</b>

















## KLUDI STANDARD

product	product description	surface	art. no.
<b>Sink</b>  	<b>KLUDI STANDARD sink mixer DN 15</b> single hole mounted flow class A swivelling casted spout (360°) aerator M 24 x 1 copper tubes 10 mm PA-IX 3105/IA DIN-DVGW-AT-2177 handle 15 = handle Terralux plastic	chrome	<b>316230515</b>
 	<b>KLUDI STANDARD multi sink mixer DN 15</b> single hole mounted flow class A swivelling casted spout (360°) aerator M 24 x 1 one connection for washing machine or dishwasher copper tubes 10 mm PA-IX 3102/IA handle 15 = handle Terralux plastic	chrome 	<b>317100515</b>
 	<b>KLUDI STANDARD multi sink mixer DN 15</b> single hole mounted flow rate 5 l/min swivelling casted spout (360°) flow regulator M 24 x 1 one connection for washing machine or dishwasher for use with displacement heaters copper tube 8/10 mm PA-IX 7727/I handle 15 = handle Terralux plastic	chrome   	<b>317300515</b>
 	<b>KLUDI STANDARD multi sink mixer DN 15</b> single hole mounted flow class A swivelling casted spout (360°) aerator M 24 x 1 two connections for washing machine and dishwasher copper tubes 10 mm PA-IX 3664/IA DIN-DVGW-AT-2177 handle 15 = handle Terralux plastic	chrome 	<b>317110515</b>
 	<b>KLUDI STANDARD sink mixer DN 15</b> single hole mounted flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 copper tubes 10 mm P-IX 3515/IA DIN-DVGW-AT-2177 handle 15 = handle Terralux plastic	chrome	<b>316580515</b>













## KLUDI STANDARD

product	product description	surface	art. no.
 	<b>KLUDI STANDARD sink mixer DN 15</b> single hole mounted flow rate 5 l/min swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 copper tube 8 mm for use with displacement heaters P-IX 8571/I handle 15 = handle Terralux plastic	chrome  	<b>319210515</b>
 	<b>KLUDI STANDARD sink mixer DN 15</b> single hole mounted flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 chainholder copper tubes 10 mm P-IX 3515/IA DIN-DVGW-AT-2177 handle 15 = handle Terralux plastic	chrome	<b>316560515</b>
 	<b>KLUDI STANDARD sink mixer DN 15</b> single hole mounted flow rate 5 l/min swivelling tube spout (360°) flow regulator M 22 x 1 spout fitting G 3/4 copper tube 8 mm for use with displacement heaters P-IX 8571/I handle 15 = handle Terralux plastic	chrome  	<b>319200515</b>
 	<b>KLUDI STANDARD wall mounted sink mixer DN 15</b> wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome chrome	<b>310520508</b> <b>310520515</b>
 	<b>KLUDI STANDARD wall mounted sink mixer DN 15</b> wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA DIN-DVGW-AT-2177 handle 08 = handle Terralux metal handle 15 = handle Terralux plastic	chrome chrome	<b>310530508</b> <b>310530515</b>







## KLUDI STANDARD

product		product description	surface	art. no.
 		<b>KLUDI STANDARD wall mounted sink mixer DN 15</b> wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 s-connections P-IX 1936/IA DIN-DVGW-AT-2177 handle 08 = handle Terralux metal	chrome	<b>310550508</b>
 		<b>special wall mounted sink mixer DN 15</b> wall fastening swivelling tube spout (360°) distance from center to center 45 mm flow class A aerator M 22 x 1 P-IX 4085/IIA handle 15 = handle Terralux plastic	chrome	<b>314530515</b>
 		<b>KLUDI STANDARD sink swivelling valve DN 15</b> wall fastening flow class A swivelling tube spout (360°) aerator M 22 x 1 spout fitting G 3/4 marking: blue/red PA-IX 2524/IA handle 15 = handle Terralux plastic	chrome	<b>304050515</b>
 		<b>KLUDI STANDARD bibcock DN 15</b> flow class A aerator M 22 x 1 marking: blue/red P-IX 2585/IA handle 15 = handle Terralux plastic	chrome	<b>300150515</b>
 		<b>KLUDI STANDARD bibcock DN 15</b> wall fastening spout fitting G 3/4 marking: blue/red handle 08 = handle Terralux metal	chrome	<b>300250508</b>








KLUDI STANDARD

product	product description		surface	art. no.
Spare parts	<b>KLUDI STANDARD handle 08</b> handle Terralux metal marking: blue		chrome	<b>7542105-00</b>
 	<b>KLUDI STANDARD handle 08</b> handle Terralux metal marking: red		chrome	<b>7542205-00</b>
 	<b>KLUDI STANDARD handle 15</b> handle Terralux plastic marking: blue		chrome	<b>7636005-00</b>
 	<b>KLUDI STANDARD handle 15</b> handle Terralux plastic marking: red		chrome	<b>7636105-00</b>
 				







## KLUDI STANDARD

product	product description	surface	art. no.
	<b>Swivelling casted spout with grub screw fixing projection 200 mm</b> aerator M 24 x 1/IA for Standard Multi mixer	chrome	<b>7540705-00</b>
	<b>Swivelling casted spout with grub screw fixing projection 200 mm</b> with flow aerator M 24 x 1/ND for Standard Multi mixer for low pressure mixer	chrome	<b>7540805-00</b>
	<b>Swivelling casted spout with grub screw fixing projection 200 mm</b> aerator M 24 x 1/IA for mixer 31623	chrome	<b>7540905-00</b>
	<b>Swivelling casted spout with grub screw fixing projection 200 mm</b> with flow aerator M 24 x 1/ND for mixer 31911	chrome	<b>7541005-00</b>
	<b>HU-spout 200 mm for Standard-kitchen mixers with grub screw fixing</b> aerator M 22 x 1/A	chrome	<b>7540405-00</b>



## KLUDI STANDARD

product	product description	surface	art. no.
	<b>HU-spout 200 mm</b> <b>for Standard-kitchen mixers with grub screw fixing</b> with flow aerator M 22 x 1/ND for low pressure mixer	chrome	<b>7540605-00</b>
	<b>HU tube spout 200 mm</b> <b>turnable</b> aerator M 22 x 1/IA with swivel nut G 3/4 for 31656, 31657, 31658	chrome	<b>7541305-00</b>
	<b>HU tube spout 200 mm</b> <b>turnable</b> with flow aerator M 22 x 1/ND with swivel nut G 3/4 for low pressure mixer 31901, 31919, 31921	chrome	<b>7541805-00</b>
	<b>s-spout</b> <b>G 3/4 x 150 mm</b>	chrome	<b>7556705-00</b>







# Spare parts and accessories



---

**Cartridge navigator**  
270



---

**Gasket kit navigator**  
272















---

**Spare parts and accessories**  
274



# Cartridge navigator

Are you looking for the right cartridge for a fitting?  
The Cartridge Navigator will give you the answer. A dot indicates the standard cartridge for the relevant range. Products with other cartridges are listed in the table with their article number.











Bathroom	High pressure						Low pressure					
Article number	7486800-00	7661900-00	7560500-00	7494700-00	7560700-00	7565400-00	7685600-00	7459800-00	7520100-00	7436600-00	7480500-00	7412900-00
Cartridge size	K25	K28	K35	KJ35	K36	K36C	K41	K41	K46	KK46	K35	K41
												
KLUDI AMBA		•					•					
KLUDI AMEO					•							
KLUDI BALANCE			•				•					
KLUDI BINGO STAR			•									
KLUDI BOZZ			•		•						•	
KLUDI E2		•					•					
KLUDI FLEXX.BOXX 88077/88075 and trim set for 88011							•					
KLUDI LOGO NEO	•		•		•	•					•	
KLUDI MEDI CARE										•		
KLUDI MX							•					•
KLUDI OBJEKTA	•		•				•				•	
KLUDI O-CEAN			•	•	•		•					
KLUDI PROVITA								•				
KLUDI PURE&EASY					•		•					
KLUDI PURE&SOLID					•		•					
KLUDI PURE&STYLE					•		•					
KLUDI ZENTA SL					•	•	•					
KLUDI ZENTA			•		•	•	•				•	



## Kitchen

### High pressure

### Low pressure

Article number	7486800-00	7560500-00	7560700-00	7685600-00	7475000-00	7520100-00	7367500-00	7302600-00	7480500-00	7412900-00
Cartridge size	K25	K35	K36	K41	K40	K46	K35a	K25	K35	K41
										
KLUDI BINGO STAR		•							•	
KLUDI BINGO STAR XS		•							•	
KLUDI BOZZ		•								
KLUDI E-GO					•					
KLUDI L-INE		•							•	
KLUDI L-INE S	•									
KLUDI LOGO NEO		•							•	
KLUDI MX				•						•
KLUDI OBJEKTA		•		•					•	
KLUDI SCOPE		•							•	
KLUDI STEEL							•			
KLUDI TANGENTA		•								
KLUDI TRENDO STAR		•							•	
KLUDI ZENTA	•		•					•		



# Gasket kit navigator

Are you looking for the right gasket kit for a KLUDI kitchen fitting? The Gasket kit Navigator will give you the answer. And this is how it works: choose the article number for the relevant kitchen mixer in the vertical column.






The mixer tap marked with a dot indicates the matching gasket kit.

GASKET KIT					
	Article number	7425300-00	7301900-00	7316700-00	7317800-00
KLUDI ADLON	516060520				
	516000520				
KLUDI BINGO STAR	428030578		•		
	428090578		•		
	428360578		•		
	428570578		•		
KLUDI BINGO STAR XS	468030578		•		
	468510578		•		
KLUDI KOMET	337940562				
	337950562				
	337960562				
	337970562				
	337980562				
	337930562				
	337990562				
	337910562				
	337920562				
KLUDI LOGO NEO	379130575				
	379190575				
KLUDI MEDI CARE	349080524				
	341130524				
	349220524				
	349250524				
	349080534				
	349200524				
	349240524				
	349230524				
	349210524				
KLUDI MX	399040562				
	399050562				
	399060562				
	399070562				
	399340562				
	399410562				
	399420562				
KLUDI OBJEKTA	399450562				
	338830575				
MIX NEW	338890575				
	337610575				
KLUDI SCOPE	339330575				
	339390575				
	339300575				
	339380575				
	339310575				
	339320575				
KLUDI TANGENTA	44904F875			•	
	44991F875				•
	44941F875				•
KLUDI TRENDO STAR	339740575				
	339750575				
	339760575				
	339770575				
	339810575				
	339780575				
KLUDI ZENTA	339790575				
	389730575				
	389790575				

[illegible]








## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
<b>Spare parts</b> 	<b>gasket kit kitchen mixers</b> series KLUDI MIX / KLUDI OBJEKTA till 12/2002	neutral	<b>7531200-00</b>
	<b>gasket kit kitchen mixers</b> series KLUDI TRENDO STAR/KLUDI KLUDI OBJEKTA MIX NEW	neutral	<b>7432900-00</b>
	<b>gasket kit kitchen mixers</b> series KLUDI MIX from 01/2003	neutral	<b>7683700-00</b>
	<b>gasket kit kitchen mixers</b> series KLUDI KOMET / KLUDI TRENDO	neutral	<b>7548400-00</b>
	<b>gasket kit kitchen mixers</b> series KLUDI LOGO	neutral	<b>7599700-00</b>







## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	<b>gasket kit</b> <b>kitchen mixers</b> series KLUDI MX	neutral	<b>7812200-00</b>
	<b>Classical lift-cone headpart G 3/8</b> <b>with handle Terralux plastic</b> marking: blue according to DIN EN 200	chrome	<b>110010515</b>
	<b>Classical lift-cone headpart G 3/8</b> <b>with handle Terralux plastic</b> marking: red according to DIN EN 200	chrome	<b>110020515</b>
	<b>Classical lift-cone headpart G 1/2</b> <b>with handle Terralux plastic</b> marking: blue/red according to DIN EN 200	chrome	<b>111030515</b>
	<b>Classical lift-cone headpart G 1/2</b> <b>with handle Terralux metal</b> marking: blue according to DIN EN 200	chrome	<b>110030508</b>



## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	<b>Classical lift-cone headpart G 1/2 with handle Terralux metal</b> marking: red according to DIN EN 200	chrome	<b>110040508</b>
	<b>Classical lift-cone headpart G 1/2 according to DIN EN 200</b>	neutral	<b>7521800-00</b>
	<b>ceramic headpart G 1/2 with ceramic discs</b> 90° right-locking according to DIN EN 200	neutral	<b>7505400-00</b>
	<b>ceramic headpart G 1/2 with ceramic discs</b> 90° left-locking according to DIN EN 200	neutral	<b>7505500-00</b>
	<b>ceramic headpart G 3/8 90° right-locking</b>	neutral	<b>7444000-00</b>





## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	ceramic headpart G 3/8 90° left-locking	neutral	7444100-00
	ceramic-headpart G 1/2 x 180°	neutral	7502500-00
	Classical lift-cone headpart G 1/2 for concealed valves DN 15 according to DIN EN 200	neutral	7557000-00
	Classical lift-cone headpart G 3/4 for concealed valves DN 20 according to DIN EN 200	neutral	7557100-00
	head part G 3/8 according to DIN EN 200	neutral	7552600-00













## SPARE PARTS UND ACCESSORIES

product		product description	surface	art. no.
		<b>cartridge 46 mm with ceramic discs</b> for compression- and depressurized fittings according to DIN EN 817	neutral	<b>7520100-00</b>
		<b>cartridge 46 mm ECO with ceramic discs</b> with pre-adjustable hot water limitation flow rate and hot-water notch according to DIN EN 817	neutral	<b>7640000-00</b>
		<b>cartridge 41 mm with ceramic discs</b> according to DIN EN 817	neutral	<b>7685600-00</b>
		<b>cartridge 41 mm with ceramic discs</b> for low pressure mixer according to DIN EN 817	neutral	<b>7412900-00</b>
		<b>cartridge 41 mm for clinic fittings with ceramic discs</b> according to DIN EN 817	neutral	<b>7459800-00</b>













## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	 <p><b>cartridge 35 mm with ceramic discs</b> for compression fittings according to DIN EN 817</p>	neutral	<b>7560500-00</b>
	 <p><b>control unit K 35 mm with ceramic discs</b> for low pressure mixers according to DIN EN 817</p>	neutral	<b>7480500-00</b>
	 <p><b>cartridge 36 mm with ceramic discs</b> for compression fittings according to DIN EN 817</p>	neutral	<b>7560700-00</b>
	 <p><b>control unit K 36 mm with ceramic discs</b> for low pressure mixer according to DIN EN 817</p>	neutral	<b>7581000-00</b>
	 <p><b>cartridge 25 mm with ceramic discs</b> according to DIN EN 817</p>	neutral	<b>7486800-00</b>













## SPARE PARTS UND ACCESSORIES

product		product description	surface	art. no.
 		<b>KLUDI E-GO</b> cartridge 40 mm	neutral	<b>7475000-00</b>
 		<b>cartridge</b> <b>for single lever mixer KLUDI MEDI CARE</b> with coupling	neutral	<b>7436600-00</b>
 		<b>KLUDI O-CEAN</b> <b>joystick ceramic cartridge</b> with ceramic discs according to DIN EN 817	neutral	<b>7494700-00</b>
 		<b>cartridge 28 mm</b> <b>with ceramic discs</b> according to DIN EN 817	neutral	<b>7661900-00</b>
 		<b>temperature control unit</b> <b>for wall mounted thermostat</b> 35200, 35205, 35260, 35400, 35401, 57420, according to DIN EN 1111	neutral	<b>7672900-00</b>






## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
 	<b>temperature control unit for concealed thermostatic mixer</b> (spare part for 7587000-00) 35156, 35158, KLUDI FLEXX.BOX 88066, according to DIN EN 1111	neutral	<b>7480900-00</b>
 	<b>temperature control unit Thermostat S 25</b> according to DIN EN 1111	neutral	<b>7639000-00</b>
 	<b>temperature control unit for concealed thermostat G 3/4</b> according to DIN EN 1111	neutral	<b>7492700-00</b>
 	<b>temperature control unit for Klinik thermostatic mixer</b> 35085	neutral	<b>7526300-00</b>
 	<b>temperature control unit for wall mounted thermostat</b> 35100, 35101 according to DIN EN 1111	neutral	<b>7447000-00</b>





## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	<b>kitchen showers</b> <b>automatic diverter: shower/spray</b> cascade aerator M 24 x 1 flow class A 33901, 33955, 31834, 31738	chrome	<b>7506805-00</b>
	<b>kitchen showers</b> <b>automatic diverter: shower/spray</b> with flow aerator M 24 x 1/ND flow rate 5 l/min 33902, 33957, 31923, 31745	chrome	<b>7566705-00</b>
<b>Accessories</b> 	<b>s-pointer aerator</b> <b>male thread M 24 x 1A</b> swivelling spray insert flow 13 l/min at 3 bar	chrome	<b>7437005-00</b>
	<b>s-pointer eco-aerator</b> <b>male thread M 24 x 1Z</b> swivelling spray insert flow rate 7,5 - 9,0 l/min at 3 bar	chrome	<b>7483905-00</b>
	<b>flow regulator</b> <b>male thread</b> M 24 x 1 ND for low pressure mixer	chrome	<b>7520505-00</b>








## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	<b>cascade aerator</b> <b>male thread M 24 x 1A</b> flow 13 l/min at 3 bar	chrome	<b>7641605-00</b>
	<b>PCA s-pointer aerator M 24 x 1</b> <b>male thread M 24 x 1A</b> flow rate 6 l/min	chrome	<b>7339005-00</b>
	<b>ball joint for bidet mixer</b> <b>without aerator M 24 x 1A</b> outside screw thread	chrome	<b>7537505-00</b>
	<b>pop-up waste G 1 1/4</b> <b>for basin-/bidet mixers</b> complete chrome plated	chrome	<b>7526005-00</b>
	<b>s-connection</b> <b>G 1/2 x G 3/4</b> with shut-off and push-on rosette	chrome	<b>7589505-00</b>



## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	s-connections G 1/2 x G 3/4		7655204-00
	installation wrench for cartridge 7520100-00 from 09/2005	neutral	92907300-00
	clamping screw wrench for cartridge 7520100-00 till 08/2005	neutral	92903200-00
	clamping screw wrench for cartridge 7560500-00	neutral	92907700-00
	clamping screw wrench for cartridge 7685600-00	neutral	92912800-00





## SPARE PARTS UND ACCESSORIES

product	product description	surface	art. no.
	<b>KLUDI WAGA / KLUDI ROTEXA installation wrench</b> pop-up wastes for pre-installation	neutral	<b>83027400-00</b>
	<b>KLUDI TASSO 90 (21095), KLUDI TASSO 50, KLUDI TASSO PLUS</b> installation wrench for pre-installation	neutral	<b>83028800-00</b>
	<b>KLUDI Universal fitting wrench for aerator</b> M 18 x 1, M 22 x 1, M 24 x 1, M 28 x 1, M 16,5 x 1 Caché® TT, Caché® TJ, Caché® TF, Caché® JR, Caché® STD	neutral	<b>7488300-00</b>
	<b>KLUDI caché-aerator</b> male thread M 16,5 x 1Z flow rate 8,4 l/min at 3 bar	neutral	<b>7426600-00</b>



# General Terms and Conditions of Sale of Kludi GmbH & Co. KG

## Article 1 General – Scope

- (1) These General Terms and Conditions of Sale shall apply to all deliveries and services of Kludi GmbH & Co. KG (referred to in the following as: Kludi); conditions of the ordering party that contradict or deviate from these General Terms and Conditions of Sale (and/or supplementary conditions) shall not apply, except where Kludi has explicitly approved their application.

These General Terms and Conditions of Sale shall also apply where Kludi is aware of conditions of the ordering party that contradict or deviate from these General Terms and Conditions of Sale, and performs the delivery to the ordering party without reservation.

If the ordering party accepts services/deliveries from Kludi without reservation, this shall also constitute acceptance of these General Terms and Conditions of Sale.

- (2) All agreements that are made between Kludi and the ordering party regarding the performance of a contract shall be recorded in writing in the respective contract. The respective contract document shall be presumed to be complete and accurate.

Where there exist between Kludi and the ordering party other unilateral or multilateral contractual agreements, and where individual clauses of those contracts conflict with clauses of these General Terms and Conditions of Sale, the clauses of those other agreements shall only replace the corresponding clauses of these General Terms and Conditions of Sale where this has been explicitly agreed.

- (3) These General Terms and Conditions of Sale shall only apply vis-à-vis companies in the meaning of Article 310 of the German Civil Code (BGB).
- (4) These General Terms and Conditions of Sale shall also apply to all future transactions with the ordering party, without Kludi being obliged to make specific reference to them in individual cases.

## Article 2 Information, advisory services

Information and advisory services regarding the products of Kludi shall be provided on the basis of the prior experience of Kludi. The values specified in that connection shall be calculated average values. Information and advisory services shall not render unnecessary suitability testing of the goods supplied and compliance with processing instructions, in particular by the ordering party.

Verbal information shall not be binding, unless an explicit agreement has been made to the contrary.

## Article 3 Quotation, quotation documents

- (1) If an order is subject to qualification as a quotation under Article 145 of the German Civil Code (BGB), Kludi shall be entitled to accept it within 3 weeks. A supply contract or other contract shall only then be considered to exist when Kludi has explicitly confirmed the order or other assignment, or when the goods have been delivered.
- (2) Samples and specimens shall be considered non-binding samples for inspection purposes. In the case of purchases based on samples and/or specimens, deviations are reserved where these are customary for the industry or lie within the scope of normal manufacturing and technical improvement. The delivery of samples or specimens shall not constitute a guarantee of quality or shelf life, or a quality agreement, and it shall not be associated with the definition of a standard quality, unless this is explicitly indicated in the order confirmation.
- (3) Samples and specimens shall be returned to Kludi in faultless condition and at the expense of the ordering party within 4 weeks. If they are not returned within this period, Kludi shall be entitled to charge the purchase price in accordance with the price list. Price lists can be requested from Kludi at any time.
- (4) Where not explicitly otherwise agreed, the specifications published by Kludi in catalogues, brochures and other publications in text or image format (e.g. descriptions, photographs or drawings) shall constitute approximate specifications, and shall not constitute quality specifications or possible uses of the goods supplied by Kludi. Specifications from Kludi shall not constitute guarantees of shelf life or quality, or quality specifications, and shall correspond to the current state of knowledge at Kludi. Kludi shall not be liable for the success of the intended use.
- (5) Kludi retains all property rights and copyrights, and rights of reproduction, to images, drawings, calculations, cost estimates, and other documents; it shall not be permissible for images, drawings, calculations, cost estimates and other documents to be disclosed to third parties. These documents shall be returned to Kludi if the order is not placed. The aforementioned provisions of this Para. 5 shall in particular apply to written documents marked „confidential“; the ordering party shall require the explicit approval of Kludi before the disclosure of these to third parties.

## Article 4 Prices, payment conditions

- (1) Unless otherwise agreed in the order confirmation, the prices of Kludi on the date of delivery apply „ex works“ and exclusive of packaging and transportation; the latter will be invoiced separately.
- (2) The statutory value-added tax is not included in the prices; it will be separately stated in the invoice at the statutory rate on the date of invoicing.
- (3) Deliveries to destinations in EU countries and in states party to the

Agreement on the European Economic Area shall be subject to an agreed carriage-paid limit of Euro 750.00 per individual order, and a small-quantity surcharge of Euro 6.00 for individual orders with a value under Euro 50.00. Where upon request of the ordering party deliveries are to be made to secondary or tertiary addresses, a surcharge of 10% of the invoice value for the order shall be charged on these delivery routes, in addition to the agreed price.

For deliveries to destinations on the continents of Asia (in particular China and Russia), Australia (including New Zealand), Africa, Antarctica, South America and North America, a carriage-paid limit of EURO 500.00 shall apply per individual order, and a small-quantity surcharge of EURO 500.00 for individual orders with a value under EURO 500.00. Where upon request of the ordering party deliveries are to be made to secondary or tertiary addresses, a surcharge of 10% of the invoice value for the order shall be charged on these delivery routes, in addition to the agreed price.

- (4) Where not otherwise specified in the order confirmation, the purchase price shall be due for payment net (without deduction) within 30 days after the invoice date. The statutory provisions regarding the consequences of default in payment shall apply. If the ordering party pays the purchase price within 10 days after the invoice date, an early payment discount of 3% of the invoice total shall apply, provided that all older purchase price debts have been paid in full. Any further early payment discount shall be subject to special explicit agreement. Payments shall be made in euros, and shall be payable free of postage and charges to paying agents specified by Kludi. Bills of exchange and cheques shall only constitute payment when they have been redeemed, and shall be accepted without obligation for timely presentation and protesting.
- (5) In the event of default, Kludi shall be entitled to claim default interest at the statutory rate (Article 288 Para. 1, Para. 2 of the German Civil Code (BGB)). If Kludi demonstrates that the default in payment has incurred higher loss of interest, this can be claimed. The right to assert further claims is explicitly reserved.
- In the case of bilateral commercial transactions, Kludi shall be entitled to charge maturity interest at a rate of 4%, starting from the date of the payment claim.
- (6) In the event of justified doubt in the solvency of the ordering party, in particular in the event of payment arrears, Kludi shall be entitled to demand advance payments or collateral from the ordering party for further deliveries, without prejudice to any further claims, and shall be entitled to revoke individually agreed payment periods.
- (7) The ordering party shall only be entitled to rights of offsetting and retention where the counterclaims have the force of law and are recognised by Kludi. Furthermore, the ordering party shall only be entitled to a right of retention where the counterclaim derives from the same contractual relationship. Kludi shall be entitled, despite any provisions of the ordering party to the contrary, to first offset payments against any older liabilities of the ordering party. If costs and interests have already been incurred, Kludi shall be entitled first to offset the payment against the cost, then against the interest, and finally against the principal demand.
- (8) All customs duties, taxes, levies etc. incurred outside the Federal Republic of Germany shall be paid by the ordering party.

## Article 5 Delivery time

- (1) Delivery schedules shall only be binding where this has been explicitly agreed. The delivery time specified by Kludi shall only begin after all technical questions have been clarified and Kludi has given an additional explicit delivery time confirmation. Delivery schedules shall be considered to have been complied with where the delivered product has left the facility of Kludi, or notification of dispatch readiness has been sent.
- (2) Compliance with delivery obligations on the part of Kludi shall furthermore be dependent on the timely and proper fulfilment of the obligations of the ordering party; this shall in particular relate to the timely receipt of all documents to be supplied by the ordering party, and required permits and approvals, in particular for plans, and compliance with the agreed payment conditions (e.g. advance payments). The right of objection on grounds of non-fulfilment of contract shall be reserved.
- (3) Where non-compliance with the agreed schedules is attributable to force majeure, e.g. mobilisation, war, rioting or similar events, e.g. strike, lockout etc., the agreed schedules shall be extended appropriately. The same shall apply in the event that Kludi itself has not received deliveries in a timely or proper manner (the agreed delivery schedules shall correspondingly be subject to proper and timely deliveries by suppliers).
- (4) Kludi shall be entitled to make partial deliveries, where these are reasonable for the ordering party. It shall be permitted for partial deliveries to be invoiced separately.
- (5) If the ordering party defaults on acceptance or culpably violates other duties of cooperation, Kludi shall be entitled to request compensation of any losses incurred by Kludi as a result, including remuneration of any excess expenditure. Further claims shall be reserved.
- (6) Where the requirements of Para. (5) apply, the risk of accidental loss or accidental deterioration of the purchased product shall be transferred to the ordering party from the date at which the latter defaults on acceptance or payment.
- (7) Kludi shall be liable in accordance with the statutory provisions where the underlying purchase contract constitutes a fixed date transaction in the



meaning of Article 286 Para. 2 of the German Civil Code (BGB) or Article 376 of the German Commercial Code (HGB). Kludi shall also be liable in accordance with the statutory provisions where a delay in delivery for which Kludi is responsible entitles the ordering party to assert that he has no further interest in the continued performance of the contract. Subject to proper and timely deliveries by sub-suppliers.

- (8) Kludi shall furthermore be liable in accordance with the statutory provisions where the delay in delivery arises from intentional or grossly negligent violation of contract for which Kludi is responsible; Kludi shall be liable for violations committed by representatives or vicarious agents of Kludi. Where the delay in delivery does not arise from an intentional violation of contract for which Kludi is responsible, the liability for compensation of damages by Kludi shall be limited to the foreseeable, typical damage.
- (9) Kludi shall also be liable in accordance with the statutory provisions where the delay in delivery for which Kludi is responsible arises from a culpable violation of a major contractual obligation; in this case, the liability for compensation of damages by Kludi shall be limited to the foreseeable, typical damage.
- (10) Kludi shall otherwise be liable in the event of delay in delivery to pay lump-sum default compensation in the sum of 3% of the value of the delivery for each full week of delay, limited, however, to a maximum of 9% of the value of the delivery.
- (11) The limitations/exclusions of liability described in Para. 7-10 of this Article shall not apply in the event of death, injury or damage to health.

#### Article 6 Transfer of risk

- (1) Unless otherwise provided for in the order confirmation, the delivery shall be agreed as „ex works“. The risk shall correspondingly be transferred to the ordering party at the latest when the delivered products are dispatched, even where partial deliveries are made, or where Kludi still has to perform other services, e.g. where Kludi has accepted the dispatch costs or the transport and/or installation costs. The provisions of Article 5 Para. 6 shall also apply.
- (2) The return of transport packaging and all other packaging shall not be accepted; this applies with the exception of pallets. The ordering party shall be obliged to dispose of the packaging at its own expense.
- (3) Where the ordering party wishes, Kludi shall arrange for the delivery to be covered by a separate transport insurance policy; the costs incurred shall be paid by the ordering party.
- (4) The statutory obligations regarding inspection and notification of defects (Article 377 of the German Commercial Code (HGB)) shall continue to apply without restriction. If the ordering party fails to perform the immediate inspection of the goods required by Article 377 of the German Commercial Code (HGB), or fails immediately to give notification of defects, the goods shall be considered approved, and the ordering party shall no longer be entitled to assert claims relating to defects or incomplete delivery. Where Kludi negotiates with the ordering party regarding a complaint raised by the latter, this shall not constitute a tacit waiver of the objection of late inspection of the goods or notification of defects without explicit notice thereof. The same shall apply to any statement from Kludi that it may be prepared to remedy the defect (or where such remediation actually takes place). Notification of defects shall require the written form.

#### Article 7 Liability for defects

Kludi shall be liable for any defects in delivery, excluding further claims, as follows:

- (1) Claims for defects shall not exist in cases of only minor deviation from the agreed quality or – in the absence of an agreement – from the customary quality, where the impairment of function is only insignificant, in cases of natural wear or damage that occurred after the transfer of risk as a result of incorrect or negligent treatment and handling (particularly by untrained personnel), improper or inappropriate use, excessive loading, inappropriate equipment, defective construction work, inappropriate building ground, incorrect installation, incorrect use, or which occur as a result of specific external factors that have not been taken into consideration by the contract, or in case of non-reproducible software errors. If the ordering party or third parties perform unprofessional modifications or maintenance work, claims for defects cannot be asserted for these or the resulting consequences. Incorrect use, in relation to which no claims for compensation of defects shall be possible, shall in particular include the installation of the object of purchase or parts thereof in other products, or the installation of third-party components into the object of purchase, or in the event of modification of the object of purchase by the ordering party, unless an alternative has explicitly been agreed.
- (2) All parts supplied that contain defects shall be either repaired or replaced free of charge at the discretion of Kludi, where and inasmuch as the cause was already present at the time of the transfer of risk (supplementary performance).
- (3) In the event of a justified notification of defects, the ordering party shall give Kludi the opportunity of supplementary performance within a reasonable period.
- (4) If the supplementary performance has failed or is unreasonable for the ordering party (Article 440 of the German Civil Code (BGB)), or is dispensable because
  - a) the supplementary performance is conclusively rejected by Kludi,

b) the supplementary performance has not been effected by a contractually determined deadline or within a specified period, and the ordering party has contractually bound the continuation of its interest in performance to the punctuality of the performance, or

- c) special circumstances exist that, under consideration of the interests of both parties, justify immediate withdrawal (Article 323 Para. 2 of the German Civil Code (BGB)), the ordering party shall immediately be entitled to reduce the purchase price or withdraw from the contract at its discretion, and (or also additionally) in accordance with Para. 10 in conjunction with Article 11 to demand compensation of damages in lieu of the performance, or reimbursement of frustrated expenditure.
- (5) The expenditures required for the purpose of supplementary performance, and in particular transportation, travel, personnel and material costs, shall be paid by Kludi. This shall not apply where the expenditures increase because the object of delivery has been removed to another location than the place of fulfilment (Article 12 Para. 3) of the delivery, except where this corresponds to the intended use of the object of delivery.
- (6) If the ordering party accepts a defective delivery despite being aware of the defect, he shall only be entitled to the claims and rights arising from the defect if he reserves these within the framework of the acceptance process.
- (7) The statements made in brochures, advertising materials, descriptions etc. regarding dimensions, weights, performance capabilities etc. shall constitute approximate statements, and not quality specifications. They shall not constitute a guarantee of quality or shelf life. Kludi reserves the right to deviations. This shall also apply to design changes.
- (8) Claims for supplementary performance shall be subject to statutory limitation in one year after the beginning of the statutory limitation period; the same shall apply for withdrawal and reduction. This period shall not apply where the law under Article 438 Para. 1 No. 2 (buildings and products for buildings), Article 479 Para. 1 (right of recourse) and Article 634a Para. 1 No. 2 (construction defects) of the German Civil Code (BGB) prescribes mandatory longer periods, and shall also not apply in cases of intent, malicious non-disclosure of the defect, or non-compliance with a quality guarantee, or violation of major contractual obligations (cardinal obligations). In such cases the statutory limitation periods shall apply.

The statutory regulations regarding suspension of expiry, suspension, and recommencement of the limitation period, shall remain unaffected; in the event of supplementary performance by means of delivery of a defect-free product, the warranty period shall however end at the time when it would have ended for the defective product.
- (9) Any rights of recourse of the ordering party against Kludi under Article 478 of the German Civil Code (BGB) (recourse of the principal) shall only apply where the ordering party has made no agreement with his customer that exceed the statutory claims for defect. The scope of the right of recourse against Kludi shall be governed by Article 478 Para. 2 of the German Civil Code (BGB), and Article 7 Para. 1-7, 10 and Article 11 shall apply correspondingly.
- (10) Any claims by the ordering party for compensation of damages in relation to a material defect shall be determined on the basis of Article 11.

#### Article 8 Returns

- (1) Returns of the purchased product shall be excluded, except in cases under Article 7.
- (2) Purchased products returned without the approval of Kludi shall be rejected by Kludi, or sent back to the ordering party freight forward.
- (3) If in individual cases and after prior explicit agreement Kludi exceptionally agrees to the return delivery, Kludi shall be entitled to invoice processing costs in the sum of at least 30% of the net value of the goods, depending on the usability of the goods.
- (4) The ordering party shall bear the transportation risk and transport costs.

#### Article 9 Retention of title

- (1) Kludi shall retain the title to all delivered products (referred to in the following as: ROT goods) until the payment of all receivables, for whatever legal reason, including receivables arising in future conditional receivables from concurrent or subsequently concluded contracts. This shall also apply where payments are made on specifically designated receivables. If there are indicators justifying the assumption of insolvency on the part of the ordering party, or the threat of such, Kludi shall be entitled to withdraw from the contract without notice, and to demand the surrender of the ROT goods.
- (2) Processing of the ROT goods shall take place on behalf of Kludi as the manufacturer in the meaning of Article 950 of the German Civil Code (BGB), without obligation for Kludi. The processed goods shall constitute ROT goods in the meaning of Para. 1. Where the ROT goods are processed, aggregated or mixed with other goods by the ordering party, Kludi shall have joint title to the new product in the ratio of the invoice value of the ROT goods to the invoice value of the other goods used. If the title of Kludi lapses upon aggregation or mixing, the ordering party hereby already transfers his ownership rights to the new stock or product in the scope of the invoice value of the ROT goods, and holds it in safekeeping for Kludi free of charge. The joint ownership rights thus arising shall constitute ROT goods in the meaning of Para. 1.
- (3) If the ROT goods are aggregated with real property by the ordering party as an entrepreneur in the meaning of Article 946 of the German Civil Code



(BGB), the ordering party shall also assign to Kludi at the time of aggregation the receivables to which he is entitled as remuneration for this aggregation, together with all auxiliary rights, and without the need for any further separate statement, as security in the sum of the ratio of the ROT goods aggregated to the other goods aggregated, or to the value of his total performance.

- (4) The ordering party shall be entitled to resell, process, aggregate with other goods, or otherwise install the ROT goods only within the framework of ordinary business operations, and provided that he is not in default of payment of the purchase price. Any other utilisation of the ROT goods shall not be permitted. Distraint or other seizure of the ROT goods by third parties shall be reported to Kludi immediately. All intervention costs shall be paid by the ordering party, where they cannot be collected by the third party, and where the third-party action against execution has legitimately been taken. If the ordering party defers payment of the purchase price for his customer, he shall be obliged to retain the title to the ROT goods under the same conditions as Kludi has retained the title to the delivery of the ROT goods. The ordering party shall however not be obliged to also retain the title in relation to the receivables to which he will be entitled from his customer in future. Resale by the ordering party shall otherwise not be authorised.
- (5) The receivables of the ordering party from the resale of the ROT goods are hereby already assigned to Kludi. These shall serve as security in the same manner as the ROT goods. Resale by the ordering party shall only be entitled and authorised where it is ensured that the receivables to which he is entitled as a result are transferred to Kludi.
- (6) If the ROT goods are sold by the ordering party at an overall price together with other goods not supplied by Kludi, the receivables from the sale shall be assigned in the value of the invoice value of the respective ROT goods sold.
- (7) If the receivables are recorded in an ongoing account, the ordering party hereby already assigns to Kludi a proportion of the balance, including the closing balance of the current account, corresponding to these receivables.
- (8) The ordering party shall be authorised to collect the assigned receivables until such authorisation is revoked by Kludi. Kludi shall be entitled to revoke this authorisation if the ordering party fails to fulfil his payment obligations arising from the business relationship in a proper manner, or if circumstances become known that have the potential to significantly reduce the credit rating of the ordering party. Where the conditions are fulfilled for this right of revocation to be exercised, upon request from Kludi the ordering party shall immediately disclose the assigned receivables and the respective debtors, provide all information required for the collection of the receivables, provide Kludi with the associated documents, and notify the debtor of the assignment. Kludi themselves shall also be entitled to notify the debtor of the assignment. The ordering party shall not otherwise be entitled to assign the receivables, and in particular not as a result of the authorisation to collect thus granted.
- (9) If the nominal value (invoice total of the goods or nominal total of the receivables entitlement) exceeds the securities held by Kludi for the secured receivables by a total of more than 10%, upon request from the ordering party Kludi shall be entitled to release securities of its choice.
- (10) If Kludi asserts a retention of title, this shall only constitute withdrawal from the contract where this is explicitly stated by Kludi. The right of the ordering party to own the ROT goods shall lapse if he fails to fulfil his obligations arising from this or another contract.

#### **Article 10 Use of image data, text, videos, and/or other print and digital media**

- (1) The use of images, image data, text, videos, and/or other media for which Kludi is entitled to industrial property rights, and in particular copyrights, exploitation rights, and rights of use, shall require the explicit prior approval of Kludi.
- (2) In the event that explicit approval is granted under Para. 1, the following points shall be binding for any use of the images, image data, text, videos, and/or other media for which Kludi is entitled to industrial property rights, and in particular copyrights, exploitation rights, and rights of use, and also during the presentation of products from Kludi on internet pages of the user:
  - a) The brand name „Kludi“ must not be used in the domain name (URL) of the user. The same shall apply correspondingly to other brands in the Kludi Group, and variations thereon.
  - b) In internet presentations and other media, only such photographs of Kludi products shall be used as are typical for the brand. Photos and silhouettes of the products used in internet presentations or other media shall be of at least the same standard as the official Kludi homepage or the print media used by Kludi. In this respect, Kludi reserves the right to make further specifications.

c) The Kludi image brand / logo shall only be used in internet presentations and other media with the explicit approval of Kludi. Articles 23 and 24 of the German Trade Marks Act (MarkenG) remain unaffected.

d) In the event of such approval being granted and the Kludi image brand / logo being used in internet presentations, it shall be linked to the website [www.kludi.com](http://www.kludi.com).

e) In the event of such approval being granted and the Kludi image brand / logo being used, only the original logo shall be used. It shall not be permitted for the user to modify the Kludi image brand / logo. The typefaces used on the Kludi homepage or in the print media used by Kludi shall also be used in the internet presentations of the user or in other media of the user, unless Kludi has explicitly approved another design.

f) The user must be clearly identifiable as the copyright holder of his internet presentation or other media. It must be beyond doubt that the internet presentation or other media is the responsibility of the user and not of Kludi. The Kludi image brand / logo shall therefore be a maximum of 50% of the height of the logo of the user.

g) Any further private or commercial use, or distribution of image data/files to third parties, shall only be permitted with the explicit prior approval of Kludi.

- (3) The use of the data provided by Kludi shall exclusively be permitted with reference to Kludi using the following format:  
© KLUDI GmbH & Co. KG, Menden, Germany
- (4) Any editing, modification, manipulation or distortion of the images and texts provided, e.g. rephotographing, graphic falsification, photocomposing, or alteration using electronic means, that exceed the scope of true-to-scale enlargement or reduction shall exclusively be permitted with the explicit approval of Kludi.
- (5) In the event of a violation of the conditions of use described in this Article 10, Kludi retains the right to exclude the user from further use of the image data, and to revoke any approval already granted. All further statutory rights shall be retained.

#### **Article 11 Compensation of damages / exclusion of liability**

- (1) Any claims by the ordering party for compensation of damage – for whatever legal reason – shall be excluded, subject to alternative provisions of these General Terms and Conditions of Supply. This shall not apply in the event of malicious non-disclosure of defects, in the event of non-compliance with a quality guarantee, in the event of death, injury or damage to health, and/or in the event of intentional or grossly negligent violation of obligations by Kludi, or in the event of a violation of obligations whose fulfilment is essential for the proper performance of the contract, and with which the ordering party is entitled to expect compliance (major contractual obligations / cardinal obligations). Claims under the German Product Liability Act shall also be unaffected by this limitation of liability. This limitation of liability shall apply equally to violations of obligations by the bodies and vicarious agents of Kludi.
- (2) Vis-à-vis entrepreneurs, the claim for compensation of damages arising from violation of major contractual obligations shall, however, be limited to the foreseeable damage typical for the type of contract, in the absence of either intent or gross negligence, and in the absence of liability for death, injury or damage to health.
- (3) The aforementioned limitation of liability shall apply equally to claims for the reimbursement of frustrated expenditure (Article 284 of the German Civil Code (BGB)). The above provision shall not constitute a change of the burden of proof to the disadvantage of the ordering party.

#### **Article 12 Applicable law, jurisdiction, place of fulfilment**

- (1) Where the ordering party is a businessperson, the registered office of Kludi shall be the exclusive jurisdiction. Kludi shall however also be entitled to file claims against the ordering party at another statutory jurisdiction.
- (2) The law of the Federal Republic of Germany shall apply, excluding the UN Convention on Contracts for the International Sale of Goods and the standard rules for conflicts of international private law, and in particular the Rome I Regulation.
- (3) Where not otherwise agreed in the order confirmation, the place of fulfilment shall be the registered office of Kludi.
- (4) If individual clauses of these General Terms and Conditions of Sale are or become ineffective, wholly or in part, this shall not affect the effectiveness of the remaining clauses and the remaining parts of such clauses.

Kludi GmbH & Co. KG, As of: January 2015





99202242003/VO/01/20

Kludi GmbH & Co. KG  
P.O. Box 25 60 · 58685 Menden  
Am Vogelsang 31–33 · 58706 Menden  
Germany

T +49 2373 904-193  
F +49 2373 904-540  
E [international-sales@kludi.com](mailto:international-sales@kludi.com)